

GOODYEAR TIRES FOR CASE - NEW HOLLAND EQUIPMENT




2004 Edition




GOODYEAR
OFF-THE-ROAD-TIRES

RADIAL TIRE SELECTION LOADER APPLICATION

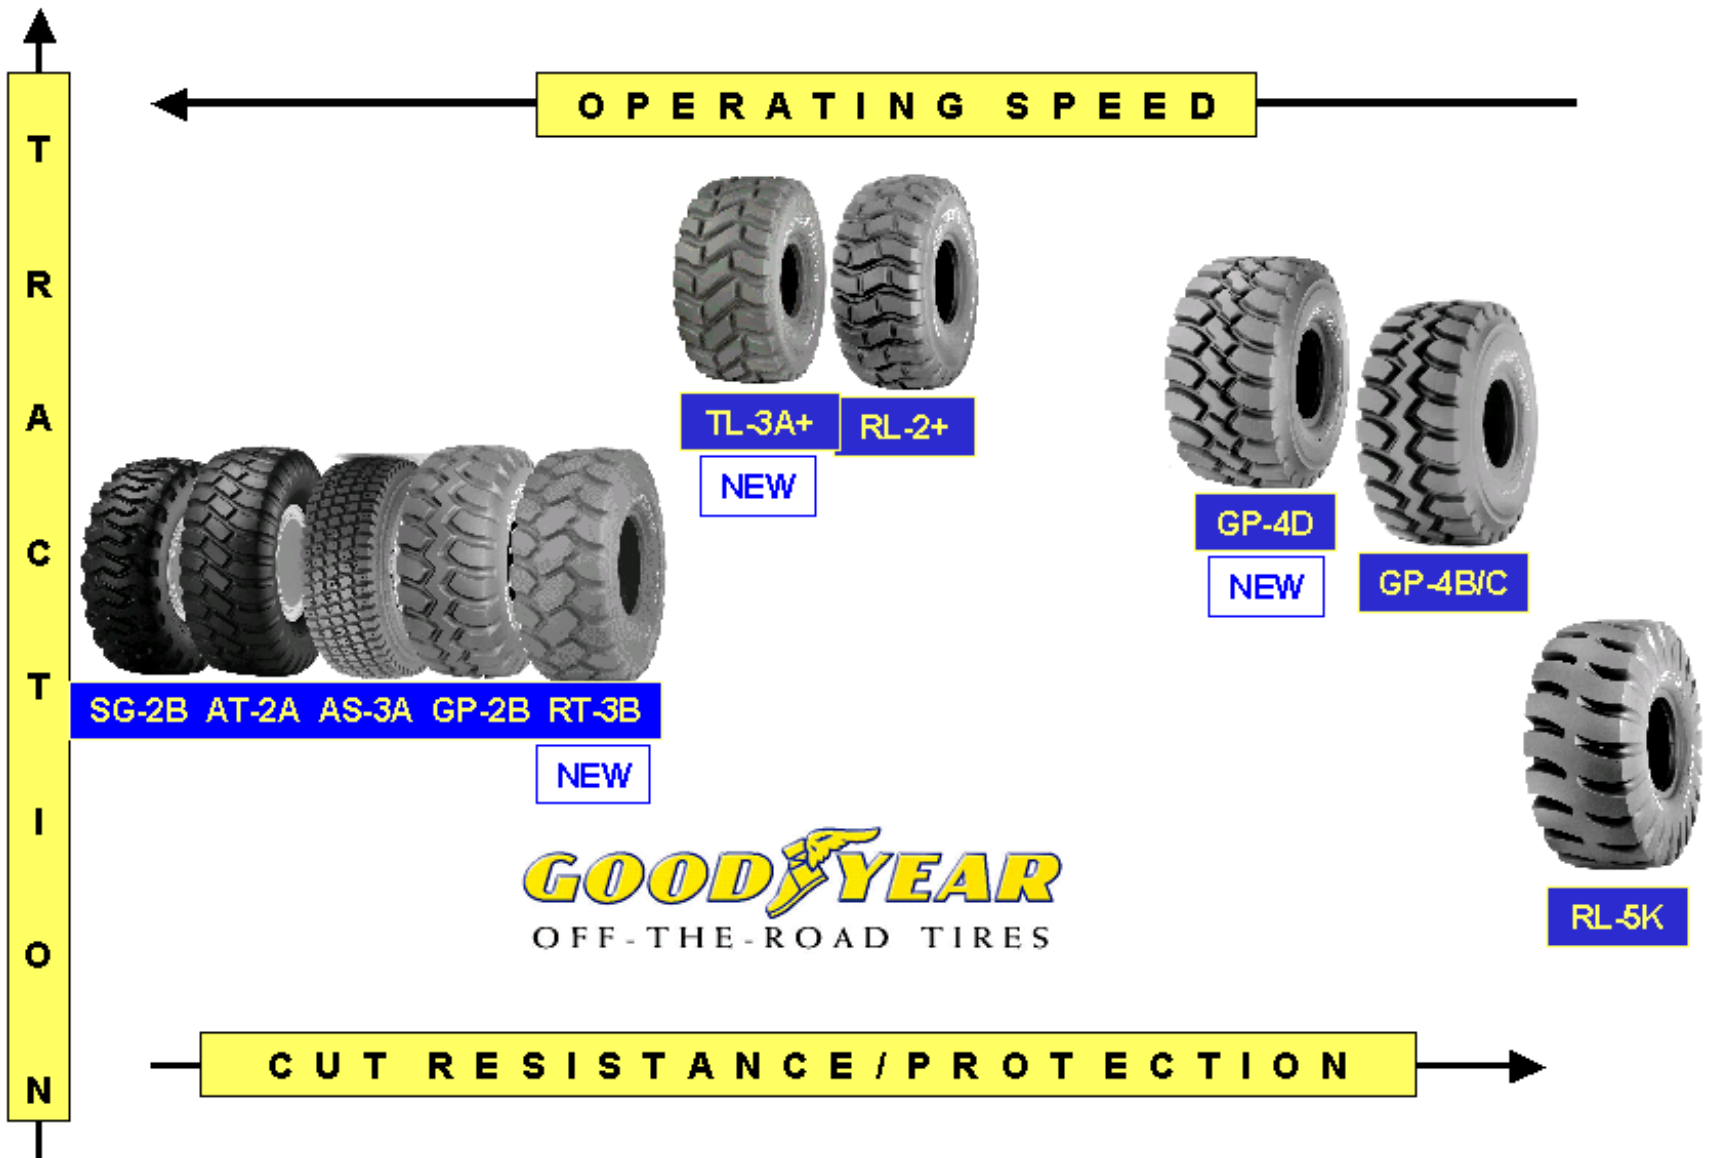

BIAS TIRE SELECTION LOADER APPLICATION

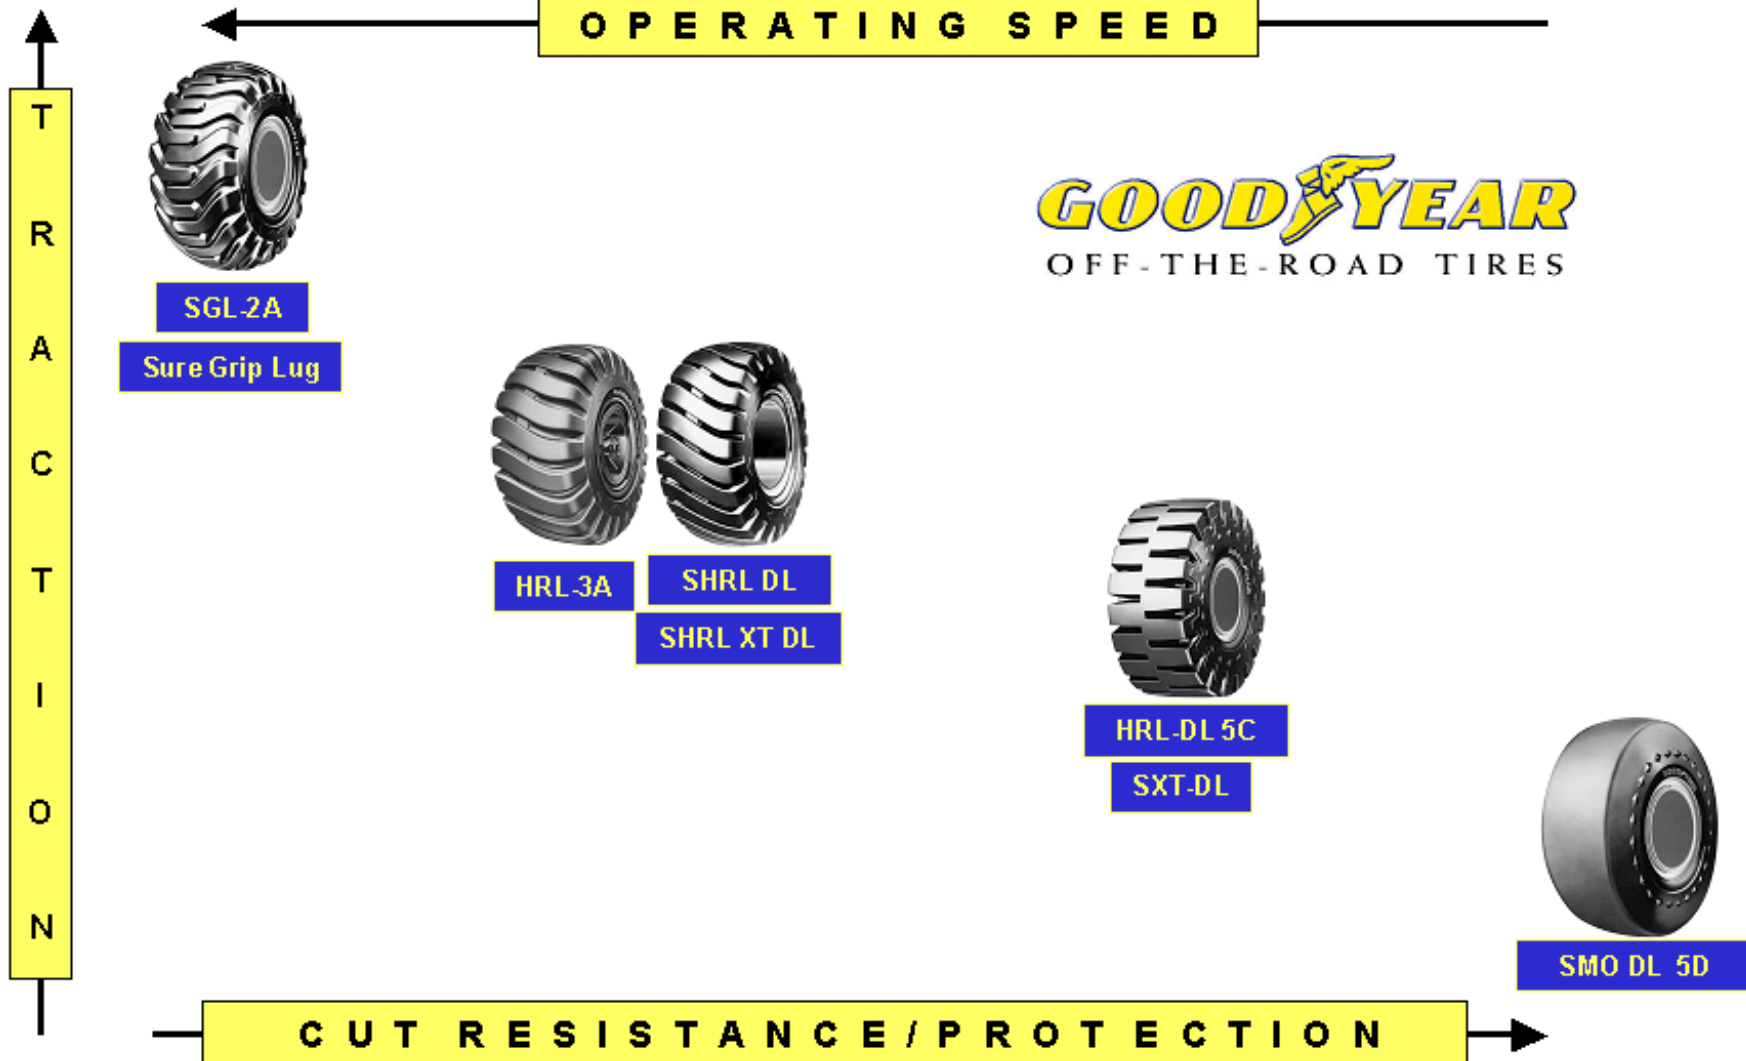

Case - New Holland Loaders

RADIAL APPLICATION						BIAS APPLICATION						
Model No.	Vehicle Capacity (yd ³)	Tire Size	Type/Description	Star Rating	CNH Order Code	Industry Code	Tire Size	Type/Description	Ply Rating	CNH Order Code	Industry Code	
521D	2.0 - 2.5	17.5R25	GP-2B	1*	AR	L2 / L3	17.5-25	SGL DL-2A	12 PR	DG	L2	
		17.5R25	SG-2B	1*		L2	17.5-25	SGL DL-2A	16 PR		L2	
		17.5R25	AS-3A	1*		L2	17.5-25	SGL DL-2A	20 PR		L2	
		17.5R25	AT-2A	1*		L2 / L3	17.5-25	HRL DL-3A	12 PR		FG	L3
		17.5R25	RL-2+	1*		L3+T	17.5-25	HRL DL-3A	16 PR			L3
		17.5R25	RL-5K	1*		L-5	17.5-25	HRL DL-3A	20 PR			L3
		550/65R25	GP-3B	1*		L-3T						
621D	2.5 - 3.0	20.5R25	GB-2B	1*	CR	L2 / L3	20.5-25	SGL EL-2A	12 PR	HG	L2	
		20.5R25	RT-3B	1*		L3	20.5-25	SGL EL-2A	16 PR		L2	
		20.5R25	RL-2+	1*		L3+T	20.5-25	SGL EL-2A	20 PR		L2	
		20.5R25	TL-3A+	1*		L3+T	20.5-25	HRL EL-3A	12 PR		KG	L3
		20.5R25	GP-4B AT	1*		L-4	20.5-25	HRL EL-3A	16 PR			L3
		20.5R25	RL-5K	1*		L-5	20.5-25	HRL EL-3A	20 PR			L3
		650/65R25	GP-3B	1*		L-3T	20.5-25	SXT LDR	12 PR			L5
721D	3.0 - 3.5	20.5R25	GP-2B	1*	CR	L2 / L3	20.5-25	SGL EL-2A	12 PR	HG	L2	
		20.5R25	RT-3B	1*		L3	20.5-25	SGL EL-2A	16 PR		L2	
		20.5R25	RL-2+	1*		L3+T	20.5-25	SGL EL-2A	20 PR		L2	
		20.5R25	TL-3A+	1*		L3+T	20.5-25	HRL EL-3A	12 PR		KG	L3
		20.5R25	GP-4B AT	1*		L-4	20.5-25	HRL EL-3A	16 PR			L3
		20.5R25	RL-5K	1*		L-5	20.5-25	HRL EL-3A	20 PR			L3
		650/65R25	GP-3B	1*		L-3T	20.5-25	SXT LDR	12 PR			L5

Bold is available OE

Case - New Holland Loaders

		RADIAL APPLICATION					BIAS APPLICATION					
MODEL	CAPACITY RANGE	SIZE	TYPE	STAR RATING	CNH Order Cod	IND CODE	SIZE	TYPE	PLY RATING	CNH Order Cod	IND CODE	
821D	3.5 - 4.0	23.5R25	GP-2B	1*	LG	L2 / L3	23.5-25	SGL EL-2A	12 PR	EG	L2	
		23.5R25	RT-3B	1*	KG*	L3	23.5-25	SGL EL-2A	16 PR		L2	
		23.5R25	RL-2+	1*		L3+T	23.5-25	SGL EL-2A	20 PR		L2	
		23.5R25	GP-4B AT	1*		L-4	23.5-25	HRL EL-3A	12 PR	JG	L3	
		23.5R25	GP-4C	1*		L-4	23.5-25	HRL EL-3A	16 PR		L3	
		23.5R25	RL-5K	1*		L-5	23.5-25	HRL EL-3A	20 PR		L3	
		750/65R25	GP-3B	1*		L-3T	23.5-25	SHRL XT DL	20 PR			L-4
		750/65R25	RL-2+	2*		L2+T-L3+T	23.5-25	SXT DL	20 PR			L-5
921D	4.75-5.0	26.5R25	GP-2B	1*	VG	L2 / L3	26.5-25	SGLug DL-2A	20 PR	PG	L2	
		26.5R25	RT-3B	1*		L3	26.5-25	SHRL DL	20 PR	UG	L3	
		26.5R25	RL-2+	1*		L3+T	26.5-25	SHRL DL	26 PR		L3	
		26.5R25	TL-3A+	1*		L3+T	26.5-25	SHRL XT DL	20 PR	YG	L-4	
		26.5R25	GP-4B AT	1*		L-4	26.5-25	SHRL XT DL	24 PR		L-4	
		26.5R25	RL-5K	1*		L-5	26.5-25	SHRL XT DL	32 PR		L-4	
		800/65R29	GP-4D	1*		L-4T	26.5-25	SXT DL	20 PR	CG	L-5	
								26.5-25	SXT DL	24 PR		L-5
								26.5-25	SXT DL	32 PR		L-5
								26.5-25	HRL DL 5C	20 PR		L-5
								26.5-25	SMO DL 5D	26 PR		L-5S
						26.5-25	SMO DL 5D	32 PR		L-5S		

Bold is available OE

RADIAL TIRE SELECTION ARTICULATED TRUCK APPLICATION



Case - New Holland Articulated Dump Trucks

Model No.	RADIAL APPLICATIONS			
	Tire Size	Type/Description	Star Rating	Industry Code
330	23.5R25	RL-2+	2*	E-3+T
	23.5R25	GP-4B AT	2*	E-4
	30/65R25	RL-2+	2*	E-3+T
	750/65R25	GP-3D	2*	E-3+T
350	23.5R25	RL-2+	2*	E-3+T
	23.5R25	RT-3B	2*	E-3+T
	23.5R25	GP-4B AT	2*	E-4
	30/65R25	RL-2+	2*	E-3+T
	750/65R25	GP-3D	2*	E-3+T

Goodyear Tires for Case Backhoe Loaders



IT 323

**Strong and Durable
for Heavy Duty
Applications**



IT510

**Aggressive Tread
Better Traction**



IT515

**Solid Performance
on Rock Hard
Ground**



IT525

**Smooth Ride
Good Traction**



LABORER

**Traction
Steerability**



SG LUG

**All Purpose
Maximum Traction**



Softrack

**Good Flotation
Dependable
Traction**

Case - New Holland Backhoe Loaders

Model No.	RADIAL TIRES					BIAS TIRES				
	Position	Tire Size	Type/ Description	Load Index	Industry Code	Position	Tire Size	Type/ Description	Ply Rating	Industry Code
570MXT (2WD)	Front	17.5LR24	IT510	135	R-4	Front	11L-16	Laborer	10,12	F-3
	Rear	19.5LR24	IT510	152	R-4	Rear	17.5L-24	IT525	10	R-4
		500/70R24	IT520	157	R-4	Rear	19.5L-24	IT525	10,12	R-4
		500/70R24	IT530	157	R-4	Rear	19.5L-24	IT515	12	R-4
							Rear	19.5L-24	Softrac II	10
570MXT (4WD)	Front	17.5LR24	IT510	135	R-4	Front	12-16.5	SGL	8,10	I-3
	Rear	19.5LR24	IT510	152	R-4	Front	12-16.5	IT323	8,10,12	SS-1
		500/70R24	IT520	157	R-4	Rear	17.5L-24	IT525	10	R-4
		500/70R24	IT530	157	R-4	Rear	19.5L-24	IT525	10,12	R-4
							Rear	19.5L-24	IT515	12
					Rear	19.5L-24	Softrac II	10	ATV	
580M (2WD) SM	Front	17.5LR24	IT510	135	R-4	Front	11L-16	Laborer	10,12	F-3
	Rear	19.5LR24	IT510	152	R-4	Rear	17.5L-24	IT525	10	R-4
						Rear	19.5L-24	IT525	10,12	R-4
						Rear	19.5L-24	IT515	12	R-4
						Rear	19.5L-24	Softrac II	10	ATV
580ML (4WD) SM	Front	17.5LR24	IT510	135	R-4	Front	12-16.5	SGL	8,10	I-3
	Rear	19.5LR24	IT510	152	R-4	Front	12-16.5	IT323	8,10,12	SS-1
		500/70R24	IT520	157	R-4	Rear	17.5L-24	IT525	10	R-4
		500/70R24	IT530	157	R-4	Rear	19.5L-24	IT525	10,12	R-4
							Rear	19.5L-24	IT515	12
					Rear	19.5L-24	Softrac II	10	ATV	
580M (4WD) Malaysia only	Front / Rear	16.9R28	IT510	154	R-4	Front	10.5/80-18	SGL	10	I-3
						Rear	16.9-28	IT525	10	R-4
590SM (2WD)						Front	14.5/75-16.1	Laborer	10	F-3
						Rear	21L-24	IT525	10,12,16	R-4
590SM (4WD)						Front	14-17.5	SGL	10	I-3
						Rear	21L-24	IT525	10,12,16	R-4

Bold is available OE

Goodyear Tires for Case Forklifts



IT510

**Aggressive Tread
Better Traction**



IT520

**Outstanding Soft
Soil Traction**



IT530

**Excellent Hard Soil
Traction**

Case Forklift Tire Sizes

Model	Radial Application			Bias Application		
	Tire Size	Type	Load Index	Tire Size	Type	Ply Rating
585G/586G (2WD) 5000/6000# Lift	17.5LR24	IT510	135	11L-16 17.5L-24	Laborer IT525	10,12 10
585G/586G (4WD) 5000/6000# Lift	17.5LR24	IT510	135	12-16.5 12-16.5 17.5L-24	SGL IT323 IT525	8,10 8,10,12 10
588G (2WD) 8000# Lift	19.5LR24 500/70R24 500/70R24	IT510 IT520 IT530	154 157 157	12-16.5 19.5L-24 19.5L-24	CHM IT525 IT515	12 12 12
588G (4WD) 8000# Lift	19.5LR24 500/70R24 500/70R24	IT510 IT520 IT530	154 157 157	12-16.5 12-16.5 19.5L-24 19.5L-24	SGL IT323 IT525 IT515	8,10 8,10,12 12 12

BOLD is Available OE