



HIGH TECH

GOODYEAR OFF-THE-ROAD  
ENGINEERING DATA

[goodyearotr.com](http://goodyearotr.com)

**GOOD**  **YEAR**  
OFF-THE-ROAD

**TABLE OF CONTENTS**

<b>SECTION</b>	<b>SUBJECT</b>	<b>PAGE</b>
<b>1</b>	<b>Introduction/Tire Selection</b>	<b>1</b>
	Off-The-Road Tires Introduction	1
	Construction Features	2
	Tire and Rim Selection, Definitions of Terms	3
	Industry Code Identification	6
	Tire Markings	7
	Ton-Mile-Per-Hour Formula	8
	Work Capability Factor	9
	Mixing of Bias and Radial Tires on Vehicle	11
	Comparative Size Chart	12
	Historic Tire Nomenclature	13
	Conversion Factors for Dimensional Data	14
	Tire Dimensions	15
<b>2</b>	<b>Dimensional Data/Load Limits</b>	<b>17</b>
	Conventional Size	17
	Wide Base Size	71
	65 Series	111
	Metric Size	121
	Underground Mine	123
<b>3</b>	<b>Load Variations</b>	<b>137</b>
	Drive Away	137
	Load Index - Kilogram loads, and TRA equivalent pound loads	143
	Load-Speed Variation - Highway	146
	Load-Speed Variation - Off-The-Road	147
<b>4</b>	<b>Tire Shipping Data - Tire Weights and Tire Shipping Volumes</b>	<b>148</b>
<b>5</b>	<b>Tire Shipping Data - Tire Weights and Tire Shipping Volumes</b>	<b>153</b>
<b>6</b>	<b>Tubes - Flaps - Valves - Rims</b>	<b>157</b>

# OFF-THE-ROAD TIRES INTRODUCTION

## GENERAL NOTES AND INFORMATION

### AVAILABILITY

Sizes listed in this book include tires currently available on a global basis and tires previously made but no longer produced. "Current In Line Locations" are regions of the world where the tire is produced or inventoried and available for sale.

**For current availability of specific sizes and types of tires contact your Goodyear Representative.**

**Construction** All tires are reinforced with nylon cords, except Unisteel Radial Ply tires, which are reinforced with steel cords.

**Dimensional Data** Dimensions of tires are for tires on design rims.

Dimensions on other rims are the same except for tire widths. Change tire widths 0.4" (10mm) for each 1" (25.4mm) change in rim width.

**Inflation Pressure** The inflation pressures shown in this data book are those taken with the tires at approximately the prevailing atmospheric temperatures and do not include any build-up due to vehicle operation.

### RIMS

**Selection of Rims** For information on rim selection see Pages 3-5.

**Strength and Application of Rims** Contact your rim supplier regarding information on rim strength, application and maximum inflation pressure.

**Rim & Wheel Restrictions** For information on rim & wheel restrictions consult rim manufacturer.

**Suffix Letters** For information on suffix letters, see Page 6.

**Tire Codes** Industry Tire Type Codes, as approved by the Tire and Rim Association, are shown whenever such codes are assigned to specific tires. (This code is used as industry comparison reference of Off-The-Road Tires regardless of the manufacturers' design name See Page 6).

**Tire Selection** For information on tire selection see Page 3.

**Valves** Consult your Valve Supplier for valve information. Also see Pages 160-166.

# CONSTRUCTION FEATURES

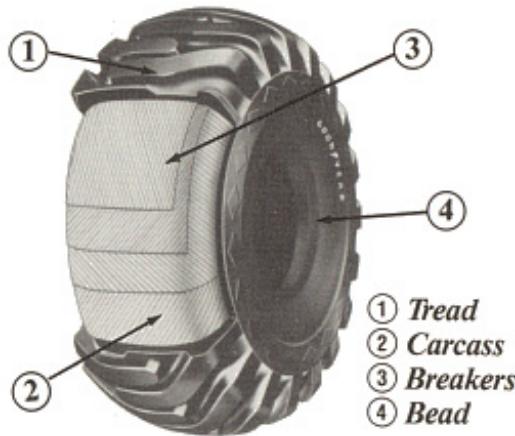


Fig. 1 Bias Tire

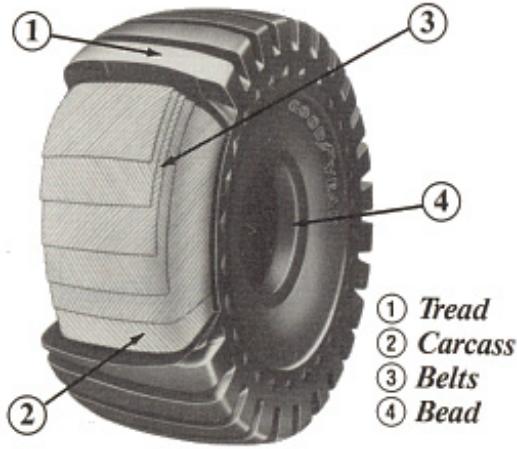


Fig. 1B Bias/Belted Tire

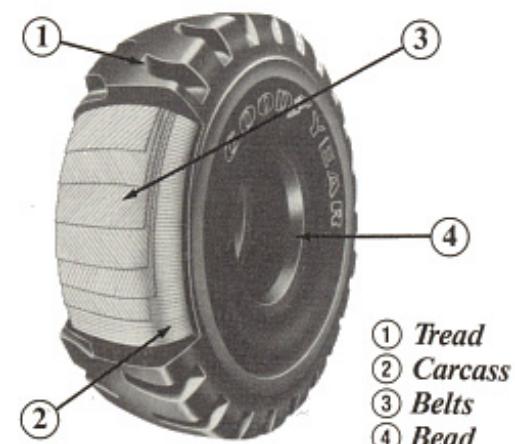


Fig. 1C Radial Tire

## Basic Design

Earthmover tires are produced in three basic constructions:

- Bias
- Bias/Belted
- Radial

All share a common nomenclature.

## Tread

The part of the tire in contact with the ground. It must provide traction, long wear and cut resistance. The tread depth and design vary based on site and application.

## Carcass

Contains the inflation medium. The greater its strength, the greater the pressure it can hold. Bias and bias/belted tire carcasses use many angled plies of fabric to achieve strength. Radials have one ply of steel wire.

## Breakers (Belts)

These are placed between the tread and carcass. They help to join these parts. They also distribute road shock to protect the carcass. In bias/belted and radial constructions, they control the diameter of the tire. They also impart superior tread impact and penetration resistance.

## Bead

Bundles of high tensile steel wire. They anchor the tire to the rim. Bias and bias/belted tires may have several bead bundles. Radials have one large bead bundle.

## Sidewalls

The protective rubber cover on the side of a tire. The rubber is compounded to flex without cracking. It also resists cuts and forms a barrier to protect the carcass from the weather.

## Inner Liner

A specially formulated rubber compound inside the tire that minimizes permeation. It works with the rim and O-ring to contain the inflation medium in tubeless designs.

# SELECTION OF TIRES AND RIMS FOR OFF-THE-ROAD VEHICLES AND DEFINITIONS OF TERMS

## TIRE SELECTION

**NEW VEHICLE DESIGN -** Proper tire size and ply rating selection shall be based on Gross Tire Load and the operating conditions specified in the table from which the tire is being selected. Gross tire loads shall be based on the highest individual wheel load determined by the Gross Vehicle Weight (GVW) distribution.

For New Haulage, Dozer and Loader Vehicle Design, the following maximum inflation pressures with the corresponding loads shown in the applicable tables are recommended to obtain optimum tire performance:

	Diagonal (Bias) Ply	Radial Ply
Wide Base	58 psi (4.0 Bar)	69 psi (4.75 Bar)
Conventional	73 psi (5.0 Bar)	83 psi (5.75 Bar)
"65 Series"	62 psi (4.25 Bar)	73 psi (5.00 Bar)

For New Vehicle Design, the maximum load per tire shall not be greater than specified in applicable tables.

**VEHICLES IN OPERATION -** Due to the specialized nature of Off-The-Road vehicle usage, loads in excess of those in the appropriate TRA load tables are often encountered. These excess loads result from items such as actual vehicle weight exceeding the design weight, varying density of materials, field modifications to the equipment, load transfer, etc. Under these conditions, the actual tire load in service may exceed the TRA load ratings in the tables for the tire by an amount not greater than shown in the following table:

	Load	* Pressure
Bias (Diagonal) Ply	15% Daily Average Overload 22% Maximum Single Journey Overload	30%
Radial	7% Daily Average Overload 14% Maximum Single Journey Overload	14%

\* When excess loads are encountered, cold inflation pressures must be increased to compensate for higher loads. For each 1% increase in load, the inflation pressure must be increased by 2%.

NOTE: These load and inflation allowances do not apply to filled tires since the internal tire cavity pressure can not be increased.

The above excess loads will result in reduced tire performance and MUST BE APPROVED BY THE TIRE MANUFACTURER.

**IMPORTANT:** Since increased tire loads and inflation pressures might exceed the rim and wheel capacity, RIM OR WHEEL MANUFACTURERS MUST BE CONSULTED.

# SELECTION OF TIRES AND RIMS FOR OFF-THE-ROAD VEHICLES AND DEFINITIONS OF TERMS

## DEFINITION OF TERMS FOR OFF-THE-ROAD TIRES

**GROSS TIRE LOAD -** Gross Tire Loads are based on the highest individual wheel load determined by the distribution of the Gross Vehicle Weight (GVW), including weight transfer. The maximum GVW shall include, but not be limited to, the following:

- 1) **Net Weight** - Actual weight of the vehicle with standard equipment including the maximum capacity of engine fuel, oil, coolant and operator.
- 2) **Accessory Weight** - The combined weight of all optional items installed on the equipment not previously considered in Net Weight. These include such items as air conditioners, special cabs, body liners, side boards, special reinforcements, etc.
- 3) **Payload** - The total weight of the material being carried.

**SERVICE CONDITIONS -** 1) **Earthmover (Haulage)** - A haulage cycle where equipment self-loads or receives a load from loading equipment, then transports this load to another location and returns unloaded. Transportation usually occurs over unimproved surfaces at medium speeds, up to 40 mph (64 kph), and short distances, up to 2.5 miles (4 Km), one way. Equipment in this category consists mainly of haulage trucks and scrapers.

2) **Loader** - This is a work cycle where the equipment is used to pick up material and relocate a short distance away. Tire loads fluctuate depending on the conditions involved when the equipment picks up the load. Transportation speeds are low, up to 5 mph (10 kph), and distances are short, a maximum of 250 feet (76m), one way.

3) **Load and Carry** - A work cycle where equipment primarily intended for loader service picks up a load and transports this load to another location and returns unloaded. Transportation usually occurs over unimproved surfaces at low speeds, up to 15 mph (24 kph), and rather short distances, up to 2,000 feet (610m). Equipment in this category consists mainly of loaders, log stackers and material handling equipment.

4) **Dozer** - A working condition where equipment is used to move materials (usually earth) by pushing, dragging or grading. Tire loads are relatively constant and speeds are low, up to 5 mph (10 kph). Travel distances vary depending on work situations.

5) **Grader** - A working condition where equipment is used in construction and road maintenance. Tire loads are relatively constant during the work cycle. Equipment speeds are slow during working periods with maximum transportation speeds reaching 25 mph (40 kph). Travel distances vary depending on work situations.

6) **Creep** - Movement of equipment at a very slow speed (not over 200 feet (61m) in 30 minutes). During creep motion, loads on the tires are very high and consideration must be given to the type of surface over which the equipment is traveling.

7) **Drive-Away** - A term used to define movement of a vehicle from one location to another under non-working conditions. This movement occurs during transportation of equipment from site to site. Load/Speed/Distance tables for off-road service are not applicable to drive-away conditions. A separate set of load tables is supplied in this book for drive-away conditions.

8) **Smooth Floors and Runways** - are defined as paved or protected operating surfaces which are free of undulations, obstructions or discontinuities.

9) **Maximum Speed** - The peak speed attained by the vehicle during any part of a cycle (loaded or unloaded).

# **SELECTION OF TIRES AND RIMS FOR OFF-THE-ROAD VEHICLES AND DEFINITIONS OF TERMS**

- TIRE TYPE NOMENCLATURE -**
- 1) **Conventional** - The cross-section shape of the tire has an aspect ratio (ratio of section height to section width) in the range of .95. Conventional tires are also referred to as narrow base tires.
  - 2) **Wide Base** - The cross-section shape of this tire has an aspect ratio in the range of .83.
  - 3) **"65 Series"** - This is a low profile tire with the aspect ratio in the range of .65.

## **RIM SELECTION**

- IMPORTANT -**
- Rim dimensions are standardized by the Tire and Rim Association for size and contour only, and particular tire and rim combinations designated to assure proper mounting and fit of the tire to the rim. The load and cold inflation pressure imposed on the rim and wheel must not exceed the rim and wheel manufacturers' recommendations even though the tire may be approved for a higher load or inflation. Rims and wheels may be identified (stamped) with a maximum load and maximum cold inflation rating. For rims and wheels not so identified or for service conditions exceeding the rated capacities, consult the rim and wheel manufacturer to determine rim and wheel capacities for the intended service.

## **LOADS/INFLATIONS**

**NOTE:** English loads and inflations are TRA (USA) standards. Metric loads are ETRTO norms except where a size or ply rating is not covered by ETRTO. In these cases, TRA (USA) SI standards are used. Metric inflations are Goodyear recommendations. English and metric loads are not directly convertible.

**Rated loads are based on cyclic operations.**

# INDUSTRY CODE IDENTIFICATION

## INDUSTRY CODE IDENTIFICATION FOR OFF-THE-ROAD TIRES

### SERVICE

C - Compactor Service  
 E - Earthmover Service  
 G - Grader Service  
 L - Loader & Dozer Service

### EARTHTOVERTER SERVICE

Code	Tread Type	Percent Tread Depth
E-1	Rib	100
E-2	Traction	100
E-3	Rock	100
E-4	Rock deep tread	150
E-7	Flotation	80

### LOADER & DOZER SERVICE

Code	Tread Type	Percent Tread Depth
L-2	Traction	100
L-3	Rock	100
L-4	Rock deep tread	150
L-5	Rock extra deep tread	250
L-3S	Smooth	100
L-4S	Smooth deep tread	150
L-5S	Smooth extra deep tread	250

### GRADER SERVICE

Code	Tread Type	Percent Tread Depth
G-1	Rib	100
G-2	Traction	100
G-3	Rock	100
G-4	Rock deep tread	150

### COMPACTOR SERVICE

Code	Tread Type	Percent Tread Depth
C-1	Smooth	100
C-2	Grooved	100

## SUFFIX LETTERS USED BY THE TIRE AND RIM ASSOCIATION IN TIRE SIZE DESIGNATIONS AND THEIR DEFINITIONS

Suffix letters are included, when necessary, as part of Tire Size Designations to differentiate between tires for service conditions which may require different loads and inflations and/or tires and must be used on different types of rims.

**NHS** Not for highway service.

**TG** Tractor-Grader tires - Not for highway service.

**ML** Mining and Logging Tires used in Intermittent Highway Service.

**DT** Tires primarily for use in sand service.

**K** Compactor tire for use on drop center or semi-drop center rims.

# TIRE MARKINGS

## Symbol marking of Radial Ply Tires

Radial earthmover tires use a simplified symbol (star) marking system as an indication of minimum recommended inflation for a particular tire load carrying capacity.

	Symbol	Inflation			
		30 mph PSI	50 kph BAR	5 mph PSI	10 kph BAR
Narrow base sizes	*	69	4.75	80	5.50
	**	102	7.00	120	8.25
	***	116	8.00	131	9.00
Wide base sizes	*	54	3.75	73	5.00
	**	76	5.25	94	6.50
	***			145	10.00

Example: Earthmover (cyclic) applications

## Service Description

In addition, these tires are marked with a "Service Description" located near the tire size marking. This consists of a code which indicates operating limits of loads and speeds and includes "load indices" for single tire fitment and "speed symbols" which relate to these indices (e.g. 202A2/180B).

This means that the tire may be used with the following maximum load/speed combination:

202 = 33,100 lbs/15,000 kg at A2 = 5 mph/10 kph

180 = 17,600 lbs/8,000 kg at B = 30 mph/50 kph

The position of the major tire markings are as shown:

- 1 - Tire section width (mm or inches)
- 2 - Aspect ratio S.H/S.W.
- 3 - Radial construction (R = Radial)
- 4 - Rim diameter (inches)
- 5 - Tubeless
- 6 - Goodyear tire name
- 7 - Star marking
- 8 - Load Index/Speed Symbol (Maximum Load/Speed combination)
- 9 - Compound/construction code



# TON-MILE-PER-HOUR-FORMULA

CALCULATE JOB TMPH REQUIREMENTS FOR EVERY JOB  
AVOID PREMATURE HEAT RELATED REMOVALS BY INSURING TIRES  
ARE RATED AT OR ABOVE JOB REQUIREMENTS.

## The TMPH Formula:

Multiply the average tire load times the average speed per hour to determine the Ton-Mile-Per-Hour Rating.

## TMPH Job Rate

Average Tire Load x Average Speed for the shift

## Average Tire Load

$$\frac{\text{"Empty" tire load in tons} + \text{"loaded" tire load in tons}}{2}$$

## Average Speed

$$\frac{\text{Round trip distance in miles} \times \text{number of trips}}{\text{Total Hours (in the shift)}}$$

## COMPOUND AND CONSTRUCTION COMBINATIONS

Compound Description	Compound Code
Heat Resistant (HR)	2
Standard	3
Standard Cut Resistant (CR)	4
Ultra Cut Resistant (UCR)	6

Construction Description	Construction Code
Standard	S
Heavy Duty	H
Extra Heavy Duty	HW
Steel Breakers	J
Heavy Undertread	U
Low Angle Belts	SL

## SAMPLE TMPH CALCULATION:

Conditions:

- Empty vehicle tire load = 20,000 pounds (10.0 tons)
- Loaded vehicle tire load = 34,000 pounds (17.0 tons)
- Number of Hours Worked = 8.0 hours
- The shift hauls 15 loads.
- Each haul is 9.0 miles, round trip.

## CALCULATION:

$$\text{Avg. Tire Load} = \frac{10 \text{ Tons} + 17 \text{ Tons}}{2}$$

$$\text{Avg. Tire Load} = \frac{27 \text{ Tons}}{2} = 13.5 \text{ Tons}$$

$$\text{Avg. Shift Speed} = \frac{9 \text{ Miles Per Trip} \times 15 \text{ Trips Per Shift}}{8.0 \text{ Hours Worked Per Shift}}$$

$$\text{Avg. Shift Speed} = \frac{135 \text{ Miles}}{8.0} = 16.9 \text{ MPH}$$

**JOB TMPH:** 13.5 Tons x 16.9 MPH = 228 TMPH

## CONCLUSION:

To avoid heat issues, tires must have a TMPH rating of 228 or higher.

If the tires on the machine are rated less than 228:

- Reduce speed
- Reduce load
- Change to tires with a higher TMPH rating

**NOTE:** Each tire position on the machine must be calculated and considered. Position with the highest average load should be used.

## TON-MILES-PER-HOUR SUMMARY

The Ton-Miles-Per-Hour formula (average tire load multiplied by average tire speed), helps you achieve optimum performance from Goodyear earthmover tires. It helps you calculate the load-speed-time factor that's within tire temperature limits. Use the TMPH formula to avoid premature tire removal due to excessive heat.

All Goodyear earthmover tires have been assigned a TMPH limit. Earthmover haul jobs operate at various TMPH rates, depending on the load, distance and time involved in round trips. Thus, each job's haul rate must be determined to compare it with each tire's TMPH rate limit.

For haul lengths in excess of 20 miles one way, consult your Goodyear Representative.

TKPH (METRIC) = Average Load (Metric Tons) x Average Speed (Km/h)

When electronic vehicle monitors are available, Goodyear uses a four hour rolling average TMPH/TKPH to determine SITE requirements.

# WORK CAPABILITY FACTOR

LOAD AND CARRY DOZER AND LOADERS

## THE WCF FORMULA

Multiply the average tire load\* times the Max. Average Speed Per Hour\*\* to determine the Work Capability Factor Rating.

\* Average Tire Load = (empty tire load in tons + loaded tire load in tons) ÷ 2

\*\* Maximum Average Speed = round trip distance in miles x maximum number of cycles per hour of continuous "Load & Carry" operation.

Goodyear Dozer and Loader tires are designed for use in "Dig and Load" service and selected on a Tire & Rim Association 5 MPH (10 KPH) maximum speed basis. Tire heat build-up in this type of operation is not a factor.

With the advent of new earthmover operational techniques, loaders are increasingly being used as transport vehicles. When a loader is used to haul material distances greater than 50 feet (15 meters), the operation is classified as "Load and Carry." Since this type of service will involve speeds above 5 MPH (10 KPH) for considerable distances, tire heat build-up must be taken into consideration to insure optimum tire performance.

As with all earthmover tires used in transport service, tire heat build-up is a function of the amount of work the tire is doing.

The increased thickness and higher load carrying requirements of Dozer and Loader tires necessitates the use of a tire limitation system - the WORK CAPABILITY FACTOR SYSTEM.

The Work Capability Factor rating system provides the guide lines to select the correct Goodyear tire for the job requirement. Years of controlled testing and field studies have culminated in a valid and practical means of establishing capabilities of Dozer and loader tires when used in "Load and Carry" Service.

The factors of Load and Speed have long been used for evaluating the limitations of transport tires. For tires used in transport service on loaders, additional factors such as more stops, starts and turning must be considered. These additional operational factors produce higher stresses on the tire components, resulting in increased tire heat build-up.

The formula is figured by multiplying the AVERAGE ton load PER TIRE and the MAXIMUM AVERAGE speed of the machine PER HOUR.

Here is an example: First, determine the AVERAGE TIRE LOAD for each tire by adding the empty tire load to the loaded tire load, and dividing by 2.

**NOTE:** Average front tire loads are always greater for front end loaders than average rear tire loads. Use the highest front tire average load for the WCF calculation. Equipment specifications, or better yet, actual weights may be used.

$$\frac{12.9 \text{ tons empty} + 21.7 \text{ tons loaded}}{2} = 17.3 \text{ Tons Avg. Load}$$

$$\frac{11.7 \text{ metric tons empty} + 19.6 \text{ metric tons loaded}}{2} = 15.7 \text{ Metric Tons Avg. Load}$$

Then, determine the MAXIMUM AVERAGE machine speed: To find this figure, compute the round trip distance in miles, and multiply that number by the maximum number of cycles per hour of CONTINUOUS "Load and Carry" operations. Short periods of vehicle downtime should not be included in the average speed calculation due to the relatively slow static cooling rate of Dig and Load tires.

$$400 \text{ feet one way} = 800 \text{ feet round trip} = 0.152 \text{ Miles/Cycle}$$
$$0.152 \frac{\text{Miles}}{\text{Cycle}} \times 24 \frac{\text{Cycles}}{\text{Hour}} = 3.6 \text{ MPH (Max. Avg.)}$$

$$125 \text{ meters one way} = 250 \text{ meters round trip} = 0.25 \text{ KM/Cycle}$$

$$0.25 \frac{\text{Kilometers}}{\text{Cycle}} \times 24 \frac{\text{Cycles}}{\text{Hour}} = 6 \text{ KPH (Max. Avg.)}$$

Now you have both the Average Tire Load for this job and the Maximum Average machine speed.

# WORK CAPABILITY FACTOR

LOAD AND CARRY DOZER AND LOADERS

To find the Work Capability Factor rating required for this job, multiply these two numbers:

$$\begin{aligned}17.3 \text{ tons} \times 3.6 \text{ mph} &= 62.28 \text{ WCF} \\(15.7 \text{ metric tons} \times 6 \text{ Kph}) &= 94.2 \text{ metric WCF}\end{aligned}$$

To find the right tire for the job consult the published Work Capability Factors for haul lengths of less than 2000 feet (610 meters) one way that have been established for each size and type of Goodyear Dozer and Loader tire, and select the tire whose WCF rate meets or exceeds the Job WCF requirement. If you have a multiple choice of tires whose WCF rate is more than the job requires, always select the tire with the lowest rate which will meet the requirement.

The Work Capability Factor requirement figure may be predetermined for any "Load and Carry" job involving Dozer and Loader tires by using this formula. If the job requires a higher WCF rating than that of the tires you are now using, you should either (a) replace the tires with higher rated types, or (b) reduce either speed or load factors to bring the WCF rating within acceptable limits for the tires.

Obviously, at extreme loads and haul distance, the WCF formula will no longer apply. Vehicles with tires loaded at 15% above their rated capacity or used on hauls of more than 2,000 feet (610 meters) one way - cannot qualify for WCF calculations. For haul lengths in excess of 2,000 feet (610 meters) one way, consult your Goodyear representative.

The WCF formula helps you select the right Dozer and Loader tires for the job - before you buy. It's another customer service at Goodyear, producers of the industry's Work Capability Factor rated Dozer and Loader tires.

## Example of WCF Application - for established job site planning a "Load & Carry" operation

1. Conditions:

$$\begin{aligned}\text{Front Tire Loads - Empty} &= 25,800\# \quad \text{AVG} = 17.3 \text{ tons} \\&\text{Loaded} = 43,400\#\end{aligned}$$

2. Tire on Loader: 35/65R33 (L-5) WCF = 80

3. Determination of Maximum Allowable Average Speed:

$$\frac{80 \text{ WCF}}{17.3 \text{ Tons}} = 4.6 \text{ MPH}$$

4. Determination of Maximum Number of Cycles per Hour:

$$4.6 \text{ MPH} = \frac{\text{Cycles}}{\text{Hour}} \times 800 \frac{\text{Feet}}{\text{Cycle}} \times 1 \frac{\text{Mile}}{5280 \text{ Feet}}$$

$$\frac{\text{Cycles}}{\text{Hour}} = \frac{4.6 \text{ MPH} \times 5280 \text{ Feet/Mi}}{800 \text{ feet/cycle}} = 30 \text{ Cycles/Hour} \quad \text{Maximum}$$

## Example of WCF Application (metric).

1. Conditions:

$$\begin{aligned}\text{Front Tire Loads - Empty} &= 11,700 \text{ Kg.} \quad \text{AVG} = 15.7 \\&\text{Loaded} = 19,600 \text{ Kg.} \quad \text{metric tons}\end{aligned}$$

2. Tire on Loader: 35/65R33 (L-5) WCF = 116 metric

3. Determination of Maximum Allowable Average Speed:

$$\frac{116 \text{ metric WCF}}{15.7 \text{ metric tons}} = 7.4 \text{ KPH}$$

4. Determination of Maximum Number of Cycles per Hour:

$$7.4 \text{ KPH} = \frac{\text{Cycles}}{\text{Hour}} \times 250 \frac{\text{Meters}}{\text{Cycle}} \times 1 \frac{\text{Kilometer}}{1000 \text{ Meters}}$$

$$\frac{\text{Cycles}}{\text{Hour}} = \frac{7.4 \text{ KPH} \times 1000 \text{ M/Km}}{250 \text{ M/Cycle}} = 30 \text{ Cycles/Hour} \quad \text{Maximum}$$

# MIXING OF BIAS AND RADIAL TIRES ON A VEHICLE

**SAME AXLE** on any vehicle - Bias and radial tires must not be mixed on the same axle of any vehicle (drive, steer or trail).

**Haul Trucks** - When mixing tire constructions, radial tires should be used only on the front/steer axle and bias tires should be used only on the rear/drive axle.

**Loaders, Container Handlers, Reach Stackers, Forklifts** - Bias tires can be used on one axle and radials on the other axle.

**Graders** - Bias or radial tires can be used on the front axle. Bias or radial tires can be used on the rear axles.

NOTE: The tandem axles must have tires of the same construction - all radial tires or all bias tires.

**Articulated Dump Truck (ADT)** - Do not mix bias and radial tires on an ADT. Radial tires are recommended.

**Scrapers** - Mixing of bias and radial tires is not recommended. Use only bias tires or only radial tires.

**Mobile Cranes** - Due to differences in cornering force characteristics and spring rates, the best tire and vehicle performance will be obtained by applying tires of the same size and construction (radial ply or bias ply) to all vehicle wheel positions. However, different tire constructions are permitted on the steer, drive, and trailer axles of two-axle, tandem, and multiple-axle combinations when the following rules are observed.

- Never mix different tire sizes or tire constructions on the same axle.
- If radials are mixed with bias tires, the best handling will be obtained with the bias tires on the steer axle.
- Bias or radial tires may be used on either axle of two-axle vehicles, providing the vehicle has dual rear wheels or is equipped with Super Single wide-base tires.
- Either bias or radial tires may be used on the steering axle of vehicles with three or more axles. Either all bias or all radial tires should be used on the nonsteering axles.
- Never mix bias and radial tires in a tandem or multiple axle combination.

Always check with the vehicle manufacturer before changing tire size or tire construction on any vehicle. Carefully evaluate performance changes caused by tire size or tire construction changes before putting the vehicle back into service.

**Other vehicle types** - Contact the vehicle and tire manufacturer for tire mixing options.

**NOTE: Ton Mile Per Hour (TMPH) and Work Capability Factor (WCF) must be considered for proper fitment to all positions.**

# COMPARATIVE SIZE CHART

# STAR RATING/PLY RATING EQUIVALENTS

Conventional		Wide Base		65 Series	
English	Metric	English	Metric	English	Metric
13.00	330	15.5	395	*	*
14.00	395	17.5	445	22	550
16.00	445	23.5	605	25	750
21.00	*	26.5	*	30	775
24.00	*	29.5	*	35	875
*	*	33.25	*	40	*
27.00	*	33.5	*	40	*
*	*	37.25	*	*	*
30.00	*	37.5	*	45	1150
*	*	41.25	*	*	*
33.00	*	41.5	*	*	*
36.00	*	45.5	*	50	1270
40.00	*	49.5	*	*	*

Notes:

(1) \* = Not available

(2) Tire widths are only listed for comparison

Service	Tire Size	Star Rating	Corresponding Ply Rating Eq.	Service	Tire Size	Star Rating	Corresponding Ply Rating Eq.
Earthmover	12.00R24	***	Up to 30	Grader	13.00R24	*	Up to 14
	13.00R24	**	Up to 26		14.00R24	*	Up to 16
	14.00R24	***	Up to 32		16.00R24	*	Up to 18
	16.00R25	**	Up to 32	Loader	14.00R24	***	Up to 28
	18.00R25	**	Up to 36		15.5R25	*	Up to 14
	18.00R33	**	Up to 38		17.5R25	**	Up to 22
	21.00R33	**	Up to 44			*	Up to 16
	21.00R35	**	Up to 44		20.5R25	*	Up to 20
	24.00R35	**	Up to 48		23.5R25	*	Up to 24
	24.00R49	**	Up to 48		26.5R25	*	Up to 26
	27.00R49	**	Up to 54		29.5R25	*	Up to 28
	30.00R51	**	Up to 60		33.25R35	*	Up to 32
	33.00R51	**	Up to 66		37.25R35	*	Up to 36
	36.00R51	**	Up to 70		37.5R39	*	Up to 36
	37.00R57	**	Up to 78		22/65R25	*	Up to 24
	40.00R57	**	Up to 80		25/65R25	*	Up to 22
	17.5R25	**	Up to 24		30/65R25	*	Up to 26
		*	Up to 16		35/65R33	**	Up to 42
		*	Up to 16			*	Up to 30
	23.5R25	**	Up to 30		45/65R45	**	Up to 58
		*	Up to 20			*	Up to 46
	26.5R25	**	Up to 34				
		*	Up to 24				
	29.5R25	**	Up to 38				
		*	Up to 26				
	29.5R29	**	Up to 38				
	33.25R29	**	Up to 46				
	33.25R35	**	Up to 46				
	37.25R35	**	Up to 48				
	37.5R39	**	Up to 48				
	40.5/75R39	**	Up to 54				
	25/65R25	**	Up to 32				
	30/65R25	**	Up to 34				

# HISTORIC TIRE NOMENCLATURE

BY ALPHA NUMERIC NAMES, PREVIOUS NAMES AND INDUSTRY CODE

## HAULAGE TIRES FOR TRUCKS AND SCRAPERS

ALPHA NUMERIC NAMES	PREVIOUS NAMES	INDUSTRY CODE
---------------------	----------------	---------------

### BIAS CONSTRUCTION - CONVENTIONAL SIZES

HRR-1A	Hard Rock Rib
XDR-1A	Extra Duty Rib
SGL-2A	Earthmover Sure Grip
HRL-3A	Hard Rock Lug
HRL-3B	Hard Rock Lug 8
HRL-3C	Hard Rock Lug 8R
WRL-3A	Hard Rock Lug Xtra Wall
HRL-4A	Hard Rock Lug XT
HRL-4B	Hard Rock Lug XT-8
MRL-4B, F	Hard Rock Lug XT-8M
EAW-7A	Earthmover All Weather
SHY-7A	Semi Highway 5 Rib

### BIAS CONSTRUCTION - WIDE BASE SIZES

SGL-2A	Sure Grip Lug
HRL-3A	Super Hard Rock Lug
HRL-3B	Super Hard Rock Lug 8
HRL-3F	
EAW-7A	Earthmover All Weather

## OTHER TIRES

ALPHA NUMERIC NAMES	PREVIOUS NAMES	INDUSTRY CODE
---------------------	----------------	---------------

### CONVENTIONAL SIZES

SMC-1A	Smooth Compactor
RTS-1A	Trib Tow Service
MC-1A	Mobile Crane Service

## SAND TIRES

ALPHA NUMERIC NAMES	PREVIOUS NAMES	INDUSTRY CODE
---------------------	----------------	---------------

### BIAS CONSTRUCTION - CONVENTIONAL SIZES

SAW-7A	Sand All Weather	E-7
SRB-7A	Sand Rib	E-7
SRB-7A, 7B	Special Sand & Road Service	E-7

## DOZER/LOADER TIRES FOR WORK MACHINES

ALPHA NUMERIC NAMES	PREVIOUS NAMES	INDUSTRY CODE
---------------------	----------------	---------------

### BIAS CONSTRUCTION - WIDE BASE SIZES

E-1	SGL D/L-2A	Sure Grip Loader	L-2/G-2
E-1	SGL D/L-2A	Sure Grip Lug DL	L-2
E-2	ELV-3A		L-3
E-3	HRL D/L-3A	Super Hard Rock Loader	L-3/G-3
E-3	HRL D/L-3A	Super Hard Rock Lug DL	L-3
E-3	HRL D/L-3B	Super Hard Rock Lug 8 DL	L-3
E-3	HRL D/L-3C		L-3
E-4	HRL D/L-4A	Super Hard Rock Lug XT DL	L-4
E-4	HRL D/L-4G		L-4
E-4	HRL D/L-4/15C		L-4
E-7	HRL D/L-5A	Super Xtra Tread DL	L-5/G-5
E-7	HRL D/L-5A	Super Xtra Tread DL	L-5
	HRL D/L-5B	Super Xtra Tread II DL	L-5

### BIAS BELTED CONSTRUCTION - 65 ASPECT RATIO SIZES

E-2	NRL D/L-4A	NYLOSTEEL Xtra Tread DL	L-4
E-3	NRL D/L-5A	NYLOSTEEL Super Xtra Tread DL	L-5

## GRADER TIRES

ALPHA NUMERIC NAMES	PREVIOUS NAMES	INDUSTRY CODE
---------------------	----------------	---------------

### BIAS CONSTRUCTION - CONVENTIONAL SIZES

RBG-1A	Rib Grader	G-1
ASG-2A	All Service Grader	G-2
SGG-2A	Sure Grip Grader	G-2
SGL D/L-2A	Sure Grip Lug Grader	L-2/G-2
HRL D/L-3A	Super Hard Rock Lug Grader	L-3/G-3
RKG-3A	Rock Grader	G-3
RKG-3C	Rock Grader	G-3
SGG-4B		G-4
HRL D/L-5A	Super Xtra Tread DL	L-5/G-5
SMO D/L-5A, B	Smooth	L-5S/G-5S
AWG-1A	All Weather Grader	
SMG-1A	Smooth Grader	

## SEVERE SERVICE- UNDERGROUND MINE AND QUARRY TIRES

ALPHA NUMERIC NAMES	PREVIOUS NAMES	INDUSTRY CODE
---------------------	----------------	---------------

### BIAS CONSTRUCTION - CONVENTIONAL SIZES

HRL-3A	Hard Rock Lug UMS	L-3
AMS-4/5A	5:1 solid to void ratio	L-4
SMO-4B	Smooth	L-4S
AMS-5/8F	8:1 solid to void ratio	L-5
AMS-5/11F	11:1 solid to void ratio	L-5
AMS-5/15C	15:1 solid to void ratio	L-5
SMO-5A, B, C	Smooth	L-5S

### BIAS CONSTRUCTION - WIDE BASE SIZES

SMO D/I-3A	Smooth	L-3S
SMO D/L-4A, B	Smooth	L-4S
AMS D/L-5/8H	8:1 solid to void ratio	L-5
AMS D/L-5/9A	9:1 solid to void ratio	L-5
AMS, DMS D/L-4/15C	15:1 solid to void ratio	L-4
AMS, DMS D/L-4/15	15:1 solid to void ratio	L-5
DRL D/L-5A	Super Xtra Dual Tread	L-5
SMO D/L-5A, B	Smooth	L-5S/G-5S
SMO D/L-5A, B	Smooth	L-5S

### BIAS BELTED CONSTRUCTION - 65 ASPECT RATIO SIZES

NRL, NDL D/L-4/15C	15:1 solid to void ratio	L-4
NSM D/L-4B	Smooth	L-4S
NRL, NDL D/L-5/15C	15:1 solid to void ratio	L-5
NSM D/L-5B	Smooth	L-5S

## PORT & CONTAINER HANDLING TIRES

ALPHA NUMERIC NAMES	INDUSTRY LEVEL
---------------------	----------------


### BIAS CONSTRUCTION

ELV-3A	100
ELV-4/5A	150
ELV-4B	150
ELV-4S	150
ELV-5A	250
ELV-5C	250
ELV-5D	250

# CONVERSION FACTORS FOR DIMENSIONAL DATA

Dimensional Data	Units	Rounded off to	Conversion Factor
Minimum Dual Spacing	ins mm	to closest 0.1 unit to closest unit	(ins x 25.4)
Inflation	lbs/in <sup>2</sup> bars	to closest 5 units to closest 1/4 bar	(lbs/in <sup>2</sup> x 0.06895)
Load	lbs kgs	to closest 10 units to closest unit	(lbs x 0.4536)
Overall Width	ins mm	to closest 0.1 unit to closest unit	(ins x 25.4)
Overall Diameter	ins mm	to closest 0.1 unit to closest unit	(ins x 25.4)
Loaded Section + Gr.	ins mm	to closest 0.1 unit to closest unit	(ins x 25.4)
Static Loaded Radius	ins mm	to closest 0.1 unit to closest unit	(ins x 25.4)
Revolutions	rev/mi rev/km	to closest unit to closest unit	(rev/mi x 0.6214)
Gross Contact Area	ins <sup>2</sup> cm <sup>2</sup>	to closest unit to closest unit	(ins <sup>2</sup> x 6.452)
Weight	lbs kg	to closest unit to closest unit	(lbs x 0.4536)
Speed	rmph kph	to closest unit to closest unit	(mph x 1.609)
Tread Depth	32nds/in mm	to closest unit to closest unit	(32nds x 0.7938)
Performance Capability	TMPH TKPH	to closest unit to closest unit	(TMPH x 1.458)
Capacity	YD <sup>3</sup> M <sup>3</sup>	to closest 0.1 unit to closest unit	(YD <sup>3</sup> x 0.76456)

# TIRE DIMENSIONS

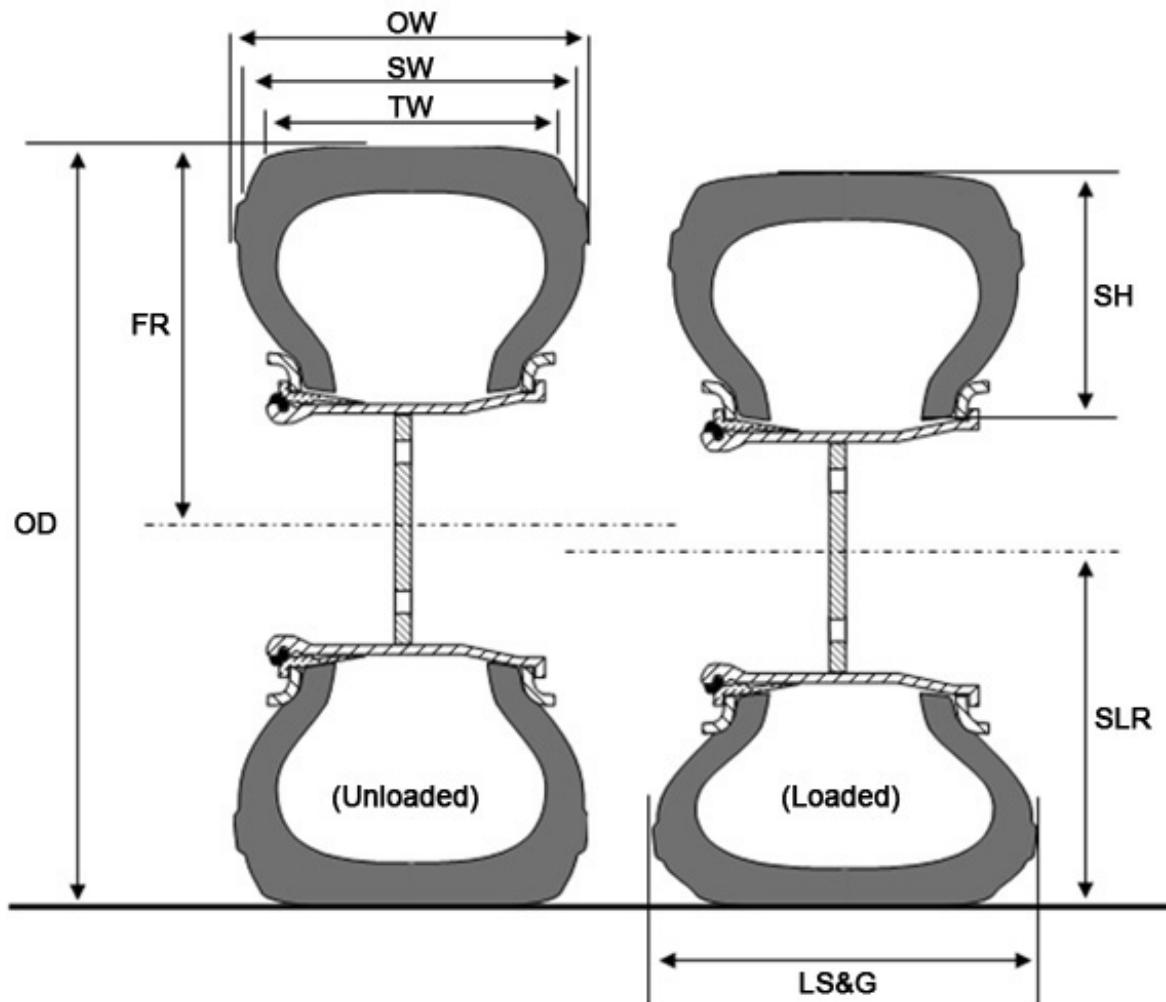

<b>(OW)</b>	<b>Overall Width</b>
<b>(SW)</b>	<b>Section Width</b>
<b>(TW)</b>	<b>Tread Width</b>
<b>(SH)</b>	<b>Section Height</b>
<b>(FR)</b>	<b>Free Radius</b>
<b>(OD)</b>	<b>Overall Diameter</b>
<b>(SLR)</b>	<b>Static Loaded Radius</b>
<b>(LS&amp;G)</b>	<b>Loaded Section &amp; Growth</b>

## Size Definitions (examples)

Listed here are examples of some of the popular size designations for earthmover tires. With each size is an explanation of what each component of the size describes:

18.00 Section width in inches	R R (Radial), - (Bias)	25 Rim diameter in inches	Narrow Base	750 Section width in mm	/65 Aspect ratio	R R (Radial), - (Bias)	25 Rim diameter in inches	Low Aspect
23.5 Section width in mm	R R (Radial), - (Bias)	25 Rim diameter in inches	Wide Base	505 Section width in mm	/95 Aspect ratio	R R (Radial), - (Bias)	25 Rim diameter in inches	Millimetric

## EXPLANATION OF HEADINGS FOR DIMENSIONAL DATA PAGES

**Type** Goodyear Sales Name

**IND Code** Industry Code - A code which indicates the type of service for the tire. Use of this code allows for comparisons between the competing brands of tires.

**Current in Line Location** Regions of the world where the tire is produced or inventoried and available for sale.

**Rim Width and Flange** Width of the rim base in inches and height of the flange for the design rim.  
*See rim section for any alternate approved rims.*

**Min. Dual Spacing** Recommended minimum distance between the tire center lines for dual applications.

**Overall Width** Measurement of the new tire when inflated and mounted on the recommended rim.

**Overall Diameter** Measurement of the new tire when inflated and mounted on the recommended rim.

**Load Sect & Growth** Loaded Section & Growth - The maximum width of a cross-sectional view of a loaded tire including the effect of the carcass stretch over time.

**Static Load Rad** Static Loaded Radius - Distance from center of wheel to ground on a vehicle which has rated load, rated inflation, and is not in motion.

**Revol Per Mi (KM)** Revolutions per mile (kilometer) - the number of revolutions that the mounted tire will make in one mile (kilometer), at rated load and inflation.

**Gross Contact Area** The surface of the tire in contact with the road surface at any given load and inflation pressure.

**Tire Volume** Total internal Tire Volume. If liquid ballast is desired, 3/4 fill can be calculated as follows:

Water Only: Vol x 0.75

CaCl<sub>2</sub> is used to prevent freezing and add additional weight. Typically it is added at a 3.5 lbs./gal. ratio.

Volume of a gal. of water = 231 cu. in.

Total Gals available x 231 = Volume in cu. in.

Swell Factor for 3.5 lbs CaCl<sub>2</sub> = 38.6 cu. in.

Vol of 1 ga. H<sub>2</sub>O + 3.5 lbs CaCl<sub>2</sub> = 269.6 cu. in.

$$\frac{3/4 \text{ total cu. in. available}}{269.6} = \text{Gal. Water Used}$$

Weight can be found by:

Weight of Water = Gal. x 8.35

+ Weight of CaCl<sub>2</sub> = Gal. x 3.5

= Ballast Weight

**Tread Depth** The depth in thirty-seconds of an inch or mm measured from the tread surface to the bottom of the tread grooves.

**Performance Capability** TMPH / TKPH ^WCF  
*See Pages 8-10 For Complete Explanation*

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
7.50-15NHS	* OLY (SMC) #	C-1	A	6.5		8.7 221	29.7 754	9.5 241	13.6 345	705 438	66.0 426					
	* SMC-1A	C-1		6.50T		8.4 213	31.0 787	9.4 239	14.2 361	700 435	64.0 413					
9.00-15	SRB-7A	E-7		5 1/2K		9.6 244	32.5 826	10.7 272	14.6 371	688 428	48.0 310			7 6		
11.00-16	SRB-7A	E-7		6.50H		10.9 277	35.6 904	12.2 310	16.6 422	598 372	67.0 432	28.0 104.0		9 7		
16.00-16	SRB-7A	E-7		6.50H		13.3 338	42.5 1080	15.7 399	17.9 455	531 330	157.0 1013			10 8		
6.00-16	SMC-1A	C-1				6.8 173	28.7 729	7.2 183	13.5 343	724 450	41.0 264					
7.50-16NHS	OLY (SMC) #	C-1	A	6.5		8.7 221	31.1 790	9.5 241	14.3 363	674 419	70.0 451					

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED COMPACTOR SERVICE

BIAS	PSI KPA	45 325	50 350	55 400	60 425	65 450	70 475	75 525	80 550	85 575	90 625	95 650	100 675	105 725	110 750	125 850
7.50-15NHS	LBS	3460	3700	3900(6)	4100	4300	4500	4680	4860	5040	5200(10)	5380	5540	5700	5860(12)	
	KG	1570	1680	1770(6)	1860	1950	2040	2120	2200	2290	2360(10)	2440	2510	2590	2650(12)	
6.00-16	LBS	2300	2450	2600	2750	2900	3000	3100	3200(6)	3370	3500	3600	3700	3800	3820(8)	4200(10)
	KG	1040	1110	1180	1250	1320	1360	1410	1450(6)	1530	1590	1630	1680	1720	1730(8)	1910(10)
BIAS	PSI KPA	45 325	50 350	55 400	60 425	65 450	70 475	75 525	80 550	85 575	90 625	95 650	100 675	105 725	110 750	125 850
	LBS	3620	3860	4080(6)	4280	4500	4680(8)	4880	5080	5260	5440(10)	5600	5780	5940	6100(12)	
	KG	1640	1750	1850(6)	1940	2040	2120(8)	2210	2300	2390	2470(10)	2540	2620	2690	2770(12)	

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250	
9.00-15	LBS	1820	2150	2470	2680	3000	3200	3420	3640	
	KG	825	975	1120	1215	1360	1450	1550	1650	
11.00-16	LBS	2270	2680	3090	3420	3750	4080	4300	4670	
	KG	1030	1215	1400	1550	1700	1850	1950	2120	
16.00-16	LBS	4410	5360	6010	6780	7390	8050	8540	9090	
	KG	2000	2430	2725	3075	3350	3650	3875	4125	

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250	
9.00-15	LBS	1230	1480	1650	1870	2040	2200	2340	2470	
	KG	560	670	750	850	925	1000	1060	1120	
11.00-16	LBS	1570	1870	2090	2340	2600	2760	3000	3310	
	KG	710	850	950	1060	1180	1250	1360	1500	
16.00-16	LBS	3090	3640	4080	4540	5070	5360	5840	6170	
	KG	1400	1650	1850	2060	2300	2430	2650	2800	

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250	
9.00-15	LBS	1050	1230	1430	1570	1710	1870	1980	2090	
	KG	475	560	650	710	775	850	900	950	
11.00-16	LBS	1320	1570	1760	1980	2150	2340	2540	2680	
	KG	600	710	800	900	975	1060	1150	1215	
16.00-16	LBS	2600	3090	3530	3860	4300	4540	4940	5200	
	KG	1180	1400	1600	1750	1950	2060	2240	2360	

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
9.00-16	SRB-7A	E-7		6.50H		10.2 259	35.0 889	11.1 282	16.0 406	620 385	56.0 361		8 6			
10.00-20ML *	HR Lug	E-3		7.5	13.5 343	10.9 277	42.7 1085	11.8 300	19.9 506	498 309	74.0 477		27 21			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
9.00-16	LBS KG	1870 850	2200 1000	2540 1150	2830 1285	3090 1400	3310 1500	3530 1600	3860 1750

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750
10.00-20ML	LBS KG	8050 3650	8250 3750	8550(12) 3875(12)	8800 4000	8800 4000	9100 4125	9350(14) 4250(14)	9650 4375	9900 4500	9900 4500	10200(16)▲ 4625(16)▲

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
9.00-16	LBS KG	1280 580	1520 690	1760 800	1930 875	2090 950	2270 1030	2470 1120	2600 1180

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500
10.00-20ML	LBS KG	3860 1750	4080(10) 1850(10)	4300 1950	4400 2000	4680(12) 2120(12)	4800 2180	4940 2240	5200(14) 2360(14)	5360 2430	5520(16) 2500(16)

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
9.00-16	LBS KG	1100 500	1280 580	1480 670	1650 750	1760 800	1930 875	2090 950	2200 1000

### 55 MPH (90 KM/H) MAXIMUM SPEED OFF-THE-ROAD MINING AND LOGGING SERVICE

BIAS	PSI KPA	45 310	50 340	55 380	60 410	65 450	70 480	75 520	80 550	85 590	90 620
10.00-20ML	LBS KG	3530 1600	3760 1710	3970 1800	4180 1900	4380 1990	4580 2080	4805(F) 2180(F)	4950 2250	5120 2320	5355(G) 2430(G)

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



### DIMENSIONAL DATA

### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
11.00-20NHS	* HR LUG WC	E-3		8.5	15.0 381	12.2 310	43.2 1097	13.3 338	20.4 518	486 302	86.0 555		28 22			
	* SMC-1A	C-1		8.5	15.0 381	11.7 298	42.3 1074	12.7 322	20.0 508	492 306	105.0 677	30.3 114.7	22 17			
11.00R20	* Dunlop PG21RC	L-2S	N L E A	8.0-20		11.5 293	42.1 1069		19.1 484				19 15			
12.00-20NHS	* SMO-5B	L-5S	E	8.5	15.1 384	13.2 335	46.3 1176						80 64			
12.00-20ML	HRL-3A	E-3	N L E	8.5	15.6 396	13.0 330	45.3 1151	14.4 366	20.8 528	457 284	125.0 807	40.0 151.4	28 22			
12.00R20NHS	EV-5S	IND-5S		8.5	15.6 396	12.3 312	46.6 1184	13.7 348	20.8 528	451 280	165.0 1067	32.0 121.0	78 62			
	RL-5K (08/08)	L-5	N	8.5	15.6 396	12.3 312	46.6 1184	13.7 348	20.8 528	451 280	165.0 1067		78 62			
	RL-5K (12/12)	L-5	N	8.5	15.6 396	12.3 312	46.6 1184	13.7 348	20.8 528	451 280	165.0 1067		78 62			
	RL-5K (24/24)	L-5	N	8.5	15.6 396	12.3 312	46.6 1184	13.7 348	20.8 528	451 280	165.0 1067		78 62			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

#### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	
11.00-20NHS	LBS KG	8550 3875	8800 4000	9100(12) 4125(12)	9350 4250	9350 4250	9650 4375	9900(14) 4500(14)	10200 4625	10470 4750	10750(16) 4875(16)	
	PSI KPA	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	
12.00-20NHS	LBS KG	9900(12) 4500(12)	10200 4625	10500 4750	10700(14) 4875(14)	11000 5000	11400 5150	11700 5300	12000(16) 5450(16)	12300 5600	12300 5600	12800▲ 5800▲
	PSI KPA	80 550	98 675	102 700	105 725	109 750	112 775	116 800	120 825	123 850	127 875	131 900
RADIAL	LBS KG	9900* 4500*	11700 5300	12000 5450	12300 5600	12800 5800	12800 6000	13200 6150**	13600** 6300	13900 6300	13900 6500	14300 6700
	PSI KPA	9900* 4500*	11700 5300	12000 5450	12300 5600	12800 5800	12800 6000	13200 6150**	13600** 6300	13900 6300	13900 6500	14300 6700
<b>12.00R20NHS</b>												
<b>LBS KG</b>												
<b>13600(20)▲ 6150(20)▲</b>												
<b>15200(28)▲ 6900(28)▲</b>												
<b>13200▲ 6000▲</b>												
<b>15200 6900</b>												
<b>15700 7100</b>												

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450
12.00-20NHS	LBS KG	4800 2180	5080 2300	5360 2430	5520 2500	5840(14) 2650(14)	6000 2725	6150 2800	6400(16) 2900(16)
	PSI KPA	4800 2180	5080 2300	5360 2430	5520 2500	5840(G) 2650(G)	6000 2725	6150 2800	6400(H) 2900(H)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450
12.00-20ML	LBS KG	4800 2180	5080 2300	5360 2430	5520 2500	5840(G) 2650(G)	6000 2725	6150 2800	6400(H) 2900(H)
	PSI KPA	4800 2180	5080 2300	5360 2430	5520 2500	5840(G) 2650(G)	6000 2725	6150 2800	6400(H) 2900(H)

### 50 MPH (80 KM/H) MAXIMUM SPEED OFF-THE-ROAD MINING AND LOGGING SERVICE

BIAS	PSI KPA	55 380	60 410	65 450	70 480	75 520	80 550	85 590	90 620	95 660
12.00-20ML	LBS KG	4930 2240	5190 2350	5440 2470	5680 2580	5910 2680	6175(G) 2800(G)	6360 2880	6580 2980	6940(H) 3150(H)
	PSI KPA	4930 2240	5190 2350	5440 2470	5680 2580	5910 2680	6175(G) 2800(G)	6360 2880	6580 2980	6940(H) 3150(H)

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
13.00-20TG	* SGG-2A	G-2	N	8.00TG		13.7 348	46.7 1186	15.6 396	21.2 539	448 278	149.0 961	46.0 173.0	30 24			
14.00-20	* SRB-7A	E-7		10.00W		15.6 396	47.5 1207	17.7 450	21.4 544	444 276	131.0 845	58.0 220.0	10 8			
14.00-20NHS	* ELV-3A	IND-3		10.00W	17.7 450											
	* HRL-3A	E-3		10.00W	17.7 450	14.8 376	49.1 1247	16.1 409	22.4 569	425 264	150.0 968		33 26			
14.00-20ML	* EM-SG	E-2		10.00W	17.7 450	15.0 381	48.6 1234	16.6 422	22.2 564	428 266	167.0 1078		32 25			
	* SGL-2A	E-2		10.00W	17.7 450	15.0 381	48.6 1234	16.6 422	22.2 564	428 266	167.0 1078		32 25			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	44 300	47 325	51 350	54 375							
13.00-20TG	LBS KG	8550 3875	8800 4000	9350 4250	9650(10) 4375(10)							
	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725
14.00-20NHS	LBS KG	13200 6000	13900 6300	14300 6500	14800 6700	14800 6700	15200 6900	15700(18) 7100(18)	16100 7300	16500 7500	16500(20) 7500(20)	17100 7750
												17600▲ 8000▲
												18700(24)▲ 8500(24)▲

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	22 150	25 175	29 200	33 225							
13.00-20TG	LBS KG	3740 1700	4080 1850	4400 2000	4680(10) 2120(10)							

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550
14.00-20NHS	LBS KG	6600(12) 3000(12)	6950 3150	7400 3350	7600 3450	8050(16) 3650(16)	8250 3750	8550 3875	8800 4000	9100(20) 4125(20)	9370 4250	9650 4375	9920(24) 4500(24)

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250				
14.00-20	LBS KG	2600 1180	3090 1400	3530 1600	3970 1800	4300 1950	4670(10) 2120(10)	4940 2240	5360(12) 2430(12)				

### 50 MPH (80 KM/H) MAXIMUM SPEED OFF-THE-ROAD MINING AND LOGGING SERVICE

BIAS	PSI KPA	40 275	45 310	50 345	55 380	60 415	65 450	70 485	75 515	80 550	85 585	90 620	95 655	100 690
14.00-20ML	LBS KG	5620 2575	6020 2725	6400 2900	6770(G) 3075(G)	7120 3250	7470 3350	7800(H) 3550(H)	8120 3650	8430 3875	8740(J) 4000(J)	9040 4125	9320 4250	9610(L) 4375(L)

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

RADIAL      BIAS



AT-2A      SRB-7A

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
14.00R20	AT-2A	E-3	N A	10.00W	17.7 450	15.1 384	49.2 1250	16.1 409	22.5 572	422 262	128.0 826	63.7 241.1	30 24			
	* AT-2A	E-3		10.00-1.5	17.7 450	15.2 386	49.2 1250	16.8 427	22.4 569	427 265	160.0 1032	63.7 241.1	30 24			
	G286*			10.00W	17.7 450	15.0 381	48.4 1229	16.7 424	22.2 563	434 269	140.0 903	62.7 237.0	19 15			
16.00-20	* SRB-7A	E-7		10.00W	20.2 513	17.0 432	52.1 1323	19.3 490	23.0 584	413 257	208.0 1342			17 13		

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
16.00-20	LBS KG	6010 2725	7170 3250	8050 3650	9090 4125	9920 4500	10750 4875	11350 5150	12350 5600

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825
14.00R20	LBS KG	13200 6000	13600* 6150*	14300 6500	14800 6700	15200 6900	15700 7100	16100 7300	16500 7500	17100 7750	17100 7750	17600 8000	18200 8250	18700** 8500**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700
14.00R20	LBS KG	7850 3550	8250* 3750*	8550 3875	8800 4000	9100 4125	9350 4250	9650 4375	10200 4625	10500 4750	10700 4875	11000** 5000**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
16.00-20	LBS KG	4080 1850	4940 2240	5510 2500	6170 2800	6780 3075	7380 3350	7830 3550	8270 3750

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
16.00-20	LBS KG	3530 1600	4080 1850	4670 2120	5200 2360	5680 2575	6170 2800	6610 3000	7170 3250

### 55 MPH (90 KM/H) MAXIMUM SPEED SERVICE

RADIAL	PSI KPA	55 375	60 400	65 450	70 475	75 525	80 550	85 575	90 625	95 650	100 700	105 725	110 750	115 800
14.00R20	LBS KG	6410 2900	6860 3100	7300 3300	7720(G) 3500(G)	8120 3675	8510 3850	8890(H) 4025(H)	9260 4200	9610 4350	9960(J) 4525(J)	10300 4675	10620 4825	10960(L) 4975(L)

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
16.00R20	AT-2A	E-3	N	10.00W	20.2 513	17.1 434	52.1 1323	18.9 480	23.7 602	403 250	195.0 1258	80.5 304.6	33 26			
	* AT-3A	E-3		10.00W	20.2 513	17.3 439	51.7 1313	19.2 487	23.4 594	406 252	192.0 1240	79.0 299.0	33 26			
	AT-3A	L-3		10.00W	20.2 513	17.3 439	51.7 1313	19.2 487	23.4 594	406 252	192.0 1240	79.0 299.0	33 26			
	GP-AT #	E-3T		10.00W	20.2 513	17.1 434	51.8 1316	18.9 480	22.9 582	406 252	193.0 1243	79.0 299.0	33 26			
7.50-20	* Smo Crawl			6.00T	10.8 274	8.4 213	37.1 941	9.2 234	17.1 434	559 347	46.0 297		21 17			
9.00-20ML	* HRL-3A	E-3	N L	7.00	12.7 333	10.3 262	40.8 1036	11.5 292	19.2 488	517 321	72.0 465		26 21			
9.50-20NHS	* SMO-5B	L-5S	L A	7.5	13.4 340	11.2 283	41.4 1052	12.2 310	19.1 485	498 309	105.0 677		72 57			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

<u>Legend</u>	N = North America L = Latin America	E = Europe / Africa / Mid East A = Asia / Australia	# = Estimated Data * = Tube Type Tire	^ = Work Capability Factor
---------------	--	--	--	----------------------------

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825
RADIAL  16.00R20	LBS KG	17600 8000	18200* 8250*	18700 8500	19300 8750	19800 9000	20400 9250	21500 9750	22000 10000	22700 10300	22700 10300	23400 10600	24000 10900	24700** 11200**
	PSI KPA	98 675	102 700	105 725	109 750	112 775	116 800	120 825	123 850	127 875	131 900	134 925	138 950	141 975
BIAS  7.50-20NHS	LBS KG	6000 2722	6150 2790	6400 2903	6400▲ 2903▲	6600▲ 2994▲	6800▲ 2994▲	6800▲ 3084▲	6950▲ 3153▲	6950▲ 3153▲	7150▲ 3243▲	7400▲ 3357▲	7400▲ 3357▲	7600(16)▲ 3447(16)▲
	PSI KPA	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800
BIAS  9.50-20NHS	LBS KG	7150 3250	7400 3350	7600 3450	7600 3450	7850(12) 3530(12)	8050 3650	8250 3750	8550 3875	8550(14) 3875(14)	8800 4000	9100▲ 4125▲	9100▲ 4125▲	9350(16)▲ 4250(16)▲

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700
RADIAL  16.00R20	LBS KG	10500 4750	11000* 5000*	11400 5150	11700 5300	12000 5450	12300 5600	12800 5800	13200 6000	13900 6300	14300 6500	14800** 6700**

### 55 MPH (90 KM/H) MAXIMUM SPEED SERVICE

	PSI KPA	55 375	60 400	65 450	70 475	75 525	80 550	85 575	90 625	95 650	100 700	105 725	110 750
RADIAL  16.00R20	LBS KG	8770 3975	9390 4250	9990 4525	10560 4800	11110 5050	11650 5275	12160 5525	12660 5750	13150 5975	13630(L) 6175(L)	14090 6400	14540(M) 6600(M)

### 55 MPH (90 KM/H) MAXIMUM SPEED OFF-THE-ROAD MINING AND LOGGING SERVICE

	PSI KPA	45 310	50 340	55 380	60 410	65 450	70 480	75 520	80 550	85 590	90 620	95 660	100 690
BIAS  9.00-20ML	LBS KG	3120 1420	3310 1500	3525(D) 1600(D)	3690 1670	3870 1760	4080(E) 1850(E)	4200 1910	4360 1980	4540(F) 2060(F)	4670 2120	4670 2190	5070(G) 2300(G)

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

RADIAL

BIAS



AT-2A



SRB-7A

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY			
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	
24-20.5	SRB-7A	E-7		18.00DC		24.2 615	53.9 1369	26.1 663	24.1 612	394 245	260.0 1677			12	10		
	SRS-7A	E-7		18.00DC		24.2 615	54.8 1392	25.8 655	24.5 622	384 239	232.0 1497			13	10		
14.00R21	AT-2A	E-3		10.00-1.5	17.7 450	15.2 386	49.2 1250	16.8 427	22.4 569	427 265	160.0 1032	63.7 241.1	30	24			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

LegendN = North America  
L = Latin AmericaE = Europe / Africa / Mid East  
A = Asia / Australia# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
24-20.5	LBS KG	7830 3530	9370 4250	10750 4875	12020 5450	12790 5800	13890 6300	15210 6900	16090 7300

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825
14.00R21	LBS KG	13200 6000	13600* 6150*	14300 6500	14800 6700	15200 6900	15700 7100	16100 7300	16500 7500	17100 7750	17100 7750	17600 8000	18200 8250	18700** 8500**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700
14.00R21	LBS KG	8250 3750	8550* 3875*	8800 4000	9100 4125	9350 4250	9650 4375	10200 4625	10500 4750	10700 4850	11000 5000	11400** 5175**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
24-20.5	LBS KG	6010 2725	7170 3250	8050 3650	9090 4125	9920 4500	10750 4875	11350 5150	12350 5600

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
24-20.5	LBS KG	4940 2240	5840 2650	6780 3075	7390 3350	8270 3750	8820 4000	9370 4250	10200 4625

### 55 MPH (90 KM/H) MAXIMUM SPEED SERVICE

RADIAL	PSI KPA	55 375	60 400	65 450	70 475	75 525	80 550	85 575	90 625	95 650	100 700	105 725	110 750	115 800
14.00R21	LBS KG	6410 2900	6860 3100	7300 3300	7720(G) 3500(G)	8120 3675	8510 3850	8890(H) 4025(H)	9260 4200	9610 4350	9960(J) 4525(J)	10300 4675	10620 4825	10960(L) 4975(L)

30

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
16.00-21NHS	HRL-3A	E-3		11.25-2.0	20.2 513	17.0 432	54.3 1379	18.8 478	25.1 638	379 236	185.0 1194	76.0 287.0	37 29			
16.00R21	AT-2A	E-3		10.00-1.5	20.2 513	17.1 434	52.1 1323	18.9 480	23.7 602	403 250	195.0 1258	80.5 304.6	33 26			
24-21	<b>SRB-7A</b>	<b>E-7</b>	N	18.00-1.5		24.2 615	53.9 1369	26.1 663	24.1 612	394 245	260.0 1677			23 18		
	SRS-7A	E-7		18.00-1.5		24.2 615	54.8 1392	25.8 655	24.5 622	384 239	232.0 1497			23 18		

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825
RADIAL	LBS KG	17600 8000	18200* 8250*	18700 8500	19300 8750	19800 9000	20400 9250	21500 9750	22000 10000	22700 10300	22700 10300	23400 10600	24000 10900	24700** 11200**
16.00R21 ( 445/90R21 )	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250					
BIAS	LBS KG	7830 3550	9370 4250	10750 4875	12020 5450	12790 5800	13890 6300	15210 6900	16090(12) 7300(12)					
24-21														

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825
RADIAL	LBS KG	17600 8000	18200* 8250*	18700 8500	19300 8750	19800 9000	20400 9250	21500 9750	22000 10000	22700 10300	22700 10300	23400 10600	24000 10900	24700** 11200**
16.00R21 ( 445/90R21 )	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250					

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400							
16.00-21NHS	LBS KG	8800 4000	9350 4250	9650(16) 4375(16)	10200 4625	10500 4750	11000(20) 5000(20)							
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700		
16.00R21 ( 445/90R21 )	LBS KG	10500 4750	11000* 5000*	11400 5150	11700 5300	12000 5450	12300 5600	12800 5800	13200 6000	13900 6300	14300 6500	14800** 6700**		

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250					
24-21	LBS KG	4940 2240	5840 2650	6780 3075	7390 3350	8270 3750	8820 4000	9370 4250	10200 4625					

### 55 MPH (90 KM/H) MAXIMUM SPEED SERVICE

RADIAL	PSI KPA	65 450	70 480	75 520	80 550	85 590	90 620	95 660	100 690	105 720	110 760			
16.00R21 ( 445/90R21 )	LBS KG	9990 4530	10560 4790	11110 5040	11650 5280	12160 5520	12660 5740	13150 5960	13900(L) 6300(L)	14350 6500	14800(M) 6700(M)			

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
12.00-24 *	HRL-3A	E-3	N E	8.50V	15.4 391	12.8 325	49.5 1257	14.0 356	22.9 582	433 269	140.0 903	47.0 177.0	28 22			
12.00-24NHS	SMO-5B	L-5S	N L E	8.5		12.8 325	50.2 1275	14.8 376	23.6 599	402 250	121.0 781		83 66			
12.00-24TG	SGG-2A	G-2		8.00TG		12.9 328	48.4 1229	14.4 366	22.4 569	425 264	139.0 897		28 22			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>A</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	36 250	40 275	44 300	47 325	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	Continued
12.00-24TG	LBS KG	7400 3350	7850 3550	8050 3650	8550(8) 3875(8)	11000 5000	11400 5150	11700 5300	12000 5450	12300 5600	12300 5600	12800 5800	13200 6000	13600(16) 6150(16)	13600 6150	13900 6300	
	PSI KPA	109 750	112 775	116 800	120 825												
	LBS KG	14300▲ 6500▲	14800▲ 6700▲	14800▲ 6700▲	15200(20)▲ 6900(20)▲												

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	18 125	22 150	25 175	29 200
12.00-24TG	LBS KG	3200 1450	3520(6) 1600(6)	3860 1750	4180(8) 1900(8)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550			
12.00-24NHS	LBS KG	5520 2500	5680 2575	6000 2725	6150 2800	6600(14) 3000(14)	6800 3075	6950 3150	7150(16) 3250(16)	7390 3350	7610 3450	7830 3550	8050(20) 3650(20)			

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450							
12.00-24ML	LBS KG	5520 2500	5680 2575	6000 2725	6150 2800	6600(G) 3000(G)	6800 3075	6950 3150	7150(H) 3250(H)							

### 50 MPH (80 KM/H) MAXIMUM SPEED OFF-THE-ROAD MINING AND LOGGING SERVICE

BIAS	PSI KPA	55 380	60 410	65 450	70 480	75 520	80 550	85 590	90 620	95 660						
12.00-24ML	LBS KG	5550 2520	5840 2650	6120 2780	6390 2900	6650 3020	6940(G) 3150(G)	7160 3250	7410 3360	7830(H) 3550(H)						

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

RADIAL



BIAS



RL-2F

RL-4J

RBG-1A

RKG-3A

SGG-2A

SMG-1A

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
12.00R24NHS *	RL-4J	E-4		8.5	15.4 391	13.3 338	50.3 1275	14.5 368	23.5 599	420 261	113.0 729	46.6 176.4	42 33	75 110	55 80	
13.00-24TG	RBG-1A	G-1		8.00TG		13.6 345	50.3 1278	15.8 401	22.8 579	414 257	138.0 890			30 24		
	RKG-3A	G-3		8.00TG		13.3 338	51.3 1303	15.1 384	23.8 605	399 248	123.0 794			30 24		
	SGG-2A	<b>G-2</b>	N L E A	8.00TG		13.5 343	50.0 1285	15.5 395	22.2 563	408 254	118.0 761	54.3 205.0	28 22			
	SMG-1A	G-3S		8.00TG		13.4 340	49.7 1262	15.6 396	22.5 572	423 263	136.0 877					
13.00R24TG	RL-2F	G-2		8.00TG		13.3 337	51.0 1295	14.6 372	23.6 599	412 256	115.0 742	57.9 219.1	27 21			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	131 900
12.00R24NHS	LBS KG	10700 4875	11400* 5150*	11700 5300	12000 5450	12300 5600	12800 5800	13200 6000	13600 6150	13900 6300	14300▲ 6500▲	14300▲ 6500▲	14800▲ 6700▲	15200**▲ 6900**▲	16100***▲ 7300***▲
BIAS	PSI KPA	44 300	47 325	51 350	54 375	58 400	62 425	65 425	69 475	73 500	76 525	80 550	83 575	87 600	
13.00-24TG	LBS KG	9350(8) 4250(8)	9900 4500	10500 4750	10700(10) 5000(10)	11400 5150	11700 5300	12000(12) 5600(12)	12300 5600	12800 5800	13200(14) 6000(14)	13600 6150	13900 6300	19300(16) 6500(16)	
RADIAL	PSI KPA	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550					
13.00R24TG	LBS KG	9350 4250	9900 4500	10500 4750	11000 5000	11400 5150	12000 5450	12300 5600	12800 5800	13200* 6000*					

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	18 125	22 150	25 175	29 200	33 225	36 250	40 275	44 300					
13.00-24TG	LBS KG	3740 1700	4180(6) 1900(6)	4540(8) 2060(8)	4940 2240	5200(10) 2360(10)	5520 2500	5840 2650	6000(12) 2725(12)					
RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375					
13.00R24TG	LBS KG	4080 1850	4400 2000	4800 2180	5200 2360	5520 2500	5840 2650	6150 2800	6600* 3000*					

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800
12.00R24NHS	LBS KG	6400 2900	6600* 3000*	6950 3150	7150 3250	7400 3350	7850 3550	8050 3650	8250 3750	8550 3875	8800 4000	8800** 4000**	9100 4125	9350▲ 4250▲	9650▲ 4375▲	9900***▲ 4500***▲

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY				
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph		
14.00-24	* HRL-3A	E-3	N L E A	10.00W	17.7 450	15.5 394	54.5 1384	16.9 429	25.6 650	372	231	145.0 934	61.0	232.0	33 26			
14.00-24NHS	* ELV-3A	IND-3		A	10.00W	18.7 475	15.5 394	54.5 1384							33 26			
	* SMO-4B	L-4S			10.00W	17.7 450	14.8 376	55.8 1417	16.0 406	26.0 660	362	225	170.0 1097			71 56		
	WRL-3A	E-3	N A															
14.00-24ML	* CHM				17.7 450	14.7 373	52.5 1334	16.0 406	24.6 625	393	244	129.0 832			20 16			
14.00-24TG	RBG-1A	G-1			8.00TG	14.4 366	52.6 1336	16.5 419	23.7 602	396	246	160.0 1033			32 25			
	RKG-3A	G-3			8.00TG	14.2 361	53.3 1354	16.0 406	24.6 625	387	241	132.0 852			32 25			
	SGG-2A	G-2	N L E A	8.00TG		14.6 370	52.6 1336	16.8 421	23.6 598	391	243	208.0 1345	62.4	236.1	30 24			
	SGG-4B	G-4	N	8.00TG		14.5 368	54.5 1384	16.9 429	24.6 625	387	241	200.0 1290			50 40			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	76 525	80 550	80 550	83 575	87 600	91 625	Continued
14.00-24TG	LBS	12000	12300(10)	13200	13600	13900(12)	14300	14800	15200	15700	15700	16100(16)	16100	16500	17100	17600	
	KG	5450	5600(10)	6000	6150	6300(12)	6500	6700	6900	7100	7100	7300(16)	7300	7500	7750	8000	
	PSI KPA	94 650	98 675	102 700	105 725	109 750	112 775	116 800	123 850	141 975							
	LBS	18200	18200	18700(20)	19300	19300	19800	20400	20900(24)	22700(28)▲							
	KG	8250	8250	8500(20)	8750	8750	9000	9250	9500(24)	10300(28)▲							

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	22 150	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	
14.00-24TG	LBS	5080	5520	5840	6150(10)	6800(12)	7150	7600	7850	8050(16)	
	KG	2300	2500	2650	2800(10)	3075(12)	3250	3450	3550	3650(16)	

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650		
14.00-24NHS	LBS	8550	8800(16)	9350	9650	9900	10200(20)	10500	10700	11000(24)	11400	11700	12000	12300(28)		
	KG	3875	4000(16)	4250	4375	4500	4625(20)	4750	4875	5000(24)	5150	5300	5450	5600(28)		

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	51 350	54 375	58 400	62 425	65 450	69 475	
14.00-24ML	LBS	8550	8800(H)	9350	9650	9900	10200(L)	
	KG	3875	4000(H)	4250	4375	4500	4625(L)	

### 50 MPH (80 KM/H) MAXIMUM SPEED OFF-THE-ROAD MINING AND LOGGING SERVICE

BIAS	PSI KPA	55 380	60 410	65 450	70 480	75 520	80 550	85 590	90 620	95 660	100 690					
14.00-24ML	LBS	7560	7960	8340	8820(H)	9070	9410	9920(J)	10090	10410	11000(L)					
	KG	3430	3610	3780	4000(H)	4110	4270	4500(J)	4580	4720	5000(L)					

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

### RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
14.00R24	MC-1A	E-1		10.00W	17.7 450	14.7 373	53.5 1359	16.0 406	24.7 627	393 244	123.0 794	75.0 284.0	31 24			
	RL-4S #	L-4S	L	10.00W		15.6 396	55.4 1407	17.1 434	24.6 624	379.2 235.6	235.0 1516	75.0 284.0	50 39			
14.00R24NHS	EV-4A (24/24)	IND-4	N E	10.00W	18.7 475	15.6 396	55.4 1407	17.9 455	25.5 648	454 282	235.0 1516	68.7 260.0	49 39			
*	EV-4S	IND-4S	N E	10.00W	18.7 475	15.6 396	55.4 1407	17.9 455	25.0 634	454 282	235.0 1516	68.7 260.0	62 49			
	GP-2B	E-3			17.7 450	15.2 386	53.5 1359	15.5 394	24.4 620	393 244	152.0 981		33 26			
*	RL-2F	E-2	A	10.00W	17.7 450	15.0 381	53.8 1367	16.5 419	24.8 630	390 242	138.0 890	75.1 284.2	29 23	110 160	85 120	
	RL-4J	E-4	N	10.00W	17.7 450	15.3 389	55.6 1412	16.7 424	25.9 658	377 234	154.0 994	68.2 258.1	48 38	85 120	65 95	
	RL-4K	E-4		10.00W	17.7 450	15.0 381	55.8 1417	16.2 411	26.0 660	362 225	190.0 1226		58 46			
	RL-4K	L-4		10.00W	17.7 450	15.0 381	55.8 1417	16.2 411	26.0 660	362 225	190.0 1226		58 46			
	RL-5K (08/08)	E-5		10.00W	17.7 450	15.0 381	55.8 1417	16.2 411	26.0 660	362 225	190.0 1226		81 64			
	RL-5K (08/08)	L-5		10.00W	17.7 450	15.0 381	55.8 1417	16.2 411	26.0 660	362 225	190.0 1226		81 64			
	RL-5K (12/12)	E-5		10.00W	17.7 450	15.0 381	55.8 1417	16.2 411	26.0 660	362 225	190.0 1226		81 64			
	RL-5K (12/12)	L-5		10.00W	17.7 450	15.0 381	55.8 1417	16.2 411	26.0 660	362 225	190.0 1226		81 64			
	RL-5K (24/24)	E-5		10.00W	17.7 450	15.0 381	55.8 1417	16.2 411	26.0 660	362 225	190.0 1226		81 64			
	RL-5K (24/24)	L-5		10.00W	17.7 450	15.0 381	55.8 1417	16.2 411	26.0 660	362 225	190.0 1226		81 64			
14.00R24TG	AS-3A	G-3	N L E A	14.00-1.5		17.7 450	53.1 1348	20.1 510	23.8 604	396 246	185.0 1190	75.0 284.0	32 25			
	RL-2F	G-2		8.00TG		14.2 361	53.8 1367	15.7 399	24.7 628	390 242	138.0 890	75.1 284.2	29 23			
	SG-2A	G-2		8.00TG		14.4 367	53.2 1352	16.6 422	24.1 612	395 245	186.0 1200	75.4 285.4	25 19			
	SG-2B	G-2	N	8.00TG		14.4 367	53.2 1352	16.6 422	24.1 612	395 245	186.0 1200	75.4 285.4	33 26			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	131 900
14.00R24NHS	LBS KG	14800 6700	15200* 6900*	15700 7100	16500 7500	17100 7750	17600 8000	17600 8000	18200 8250	18700 8500	19300 8750	19800 9000	20400 9250	20900** 9500**	22000***▲ 10000***▲

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550
14.00R24TG	LBS KG	4940 2240	5360 2430	5840 2650	6150 2800	6600 3000	7150 3250	7400 3350	8050* 3650*	8250 3750	8550 3875	9100 4125	9350 4250	9900 4500	10200 4625	10500** 4750**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800
14.00R24NHS	LBS KG	8800 4000	9100* 4125*	9650 4375	9900 4500	10200 4625	10500 4750	11000 5000	11400 5150	11700 5300	12000 5450	12300** 5600**	12300 5600	12800 5800	13200 6000	13600*** 6150***

### 55 MPH (90 KM/H) MAXIMUM SPEED SERVICE

RADIAL	PSI KPA	65 450	70 475	75 525	80 550	85 575	90 625	95 650	100 700	105 725	110 750	115 800	131 900	141 975	
14.00R24	LBS KG	8150 3700	8620 3910	9070 4110	9500 4310	9930 4500	10340 4690	10730 4870	11400(J) 5150(J)	11700 5300	12000 5450	12300(L) 5600(L)	13270(M) 6000(M)	13930(N) 6300(N)	

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

**RADIAL**



**BIAS**



SGL D/L-2A

RL-2F

HRL-3A

PVG-7A

RBG-1A

RKG-3A

SGG-2A

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
16.00-24	H R Lug XT	E-4	N A	11.25-2.0	20.2 513	17.2 437	59.9 1521	18.8 478	28.0 711	339 211	190.0 1226	78.0 295.0	67 53			
	HRL-3A	E-3		11.25-2.0		17.4 442	58.1 1476	19.2 488	26.9 683	350 218	195.0 1258	83.0 315.0	37 29			
	PVG-7A	G-7		10.00VA		20.4 520	59.0 1498	22.8 579	24.7 628	355 220	314.0 2026			15 12		
16.00-24TG	PVG-7A	E-7	N L E A	10.00VA	10.00VA 10.00VA 10.00VA 10.00VA	20.4 520	59.0 1498	22.8 579	24.7 628	355 220	314.0 2026			15 12		
	RBG-1A	G-1		10.00VA		17.3 439	57.0 1448	19.6 498	25.6 650	371 231	210.0 1355			35 28		
	RKG-3A	G-3		10.00VA		17.3 439	57.8 1468	19.4 493	26.3 668	361 224	212.0 1368			35 28		
	SGG-2A	G-2		10.00VA		16.9 429	56.1 1425	19.2 488	25.4 645	374 232	226.0 1458	79.0 298.0	35 28			
16.00R24TG	RL-2F	G-2	A	10.00VA	16.7 424	58.8 1494	18.4 468	26.9 683	357 222	180.0 1160	108.6 411.1	32 25				
18.00-24	HRL-3A	E-3		13.00-2.5		20.0 508	64.0 1626	22.2 564	29.5 749	319 198	260.0 1678			39 31		
20-24	SGL D/L-2A	L-2	L	16.00-1.4	21.5 545	54.3 1380	23.6 600	24.1 612	395 245	314.0 2026			33 26			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475
<b>16.00-24TG</b>	LBS KG	<b>14780 6700</b>	<b>15700(12) 7100(12)</b>	<b>16100 7300</b>	<b>17100 7750</b>	<b>17600 8000</b>	<b>18200(16) 8250(16)</b>	<b>18700 8500</b>	<b>19300 8750</b>

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	22 150	25 175	29 200	33 225	36 250	40 275	44 300	
<b>16.00-24TG</b>	LBS KG	<b>6600 3000</b>	<b>7150 3250</b>	<b>7600 3450</b>	<b>8050(12) 3650(12)</b>	<b>8800 4000</b>	<b>9350 4250</b>	<b>9900(16) 4500(16)</b>	
<b>RADIAL</b>	PSI KPA	<b>25 175</b>	<b>29 200</b>	<b>33 225</b>	<b>36 250</b>	<b>40 275</b>	<b>44 300</b>	<b>47 325</b>	<b>51 350</b>
<b>16.00R24TG</b>	LBS KG	<b>5680 2525</b>	<b>6400 2900</b>	<b>6950 3150</b>	<b>7400 3250</b>	<b>8050 3650</b>	<b>8550 4000</b>	<b>9100 4125</b>	<b>9650 4375</b>
									<b>10200*</b>

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	
<b>16.00-24</b>	LBS KG	<b>9650 4375</b>	<b>10200(16) 4625(16)</b>	<b>10700 4875</b>	<b>11000 5000</b>	<b>11700 5300</b>	<b>12000(20) 5450(20)</b>	
<b>BIAS</b>	PSI KPA	<b>40 275</b>	<b>44 300</b>	<b>47 325</b>	<b>51 350</b>	<b>54 375</b>	<b>58 400</b>	<b>62 425</b>
<b>18.00-24</b>	LBS KG	<b>12300(16) 5600(16)</b>	<b>13200 6000</b>	<b>13900 6300</b>	<b>14300(20) 6500(20)</b>	<b>15200 6900</b>	<b>15700 7100</b>	<b>16100(24) 7300(24)</b>
<b>BIAS</b>	PSI KPA	<b>29 200</b>	<b>33 225</b>					
<b>20-24</b>	LBS KG	<b>9370(12) 4250(12)</b>	<b>10750(14) 4875(14)</b>					

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



### BIAS



## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
14.00-25NHS	ELV-3A	IND-3		10.00	18.7 475											
14.00-25ML	HRL-3A	E-3	N E A	10.00	17.7 450	15.0 381	54.5 1384	16.5 419	25.5 648	373 231	149.0 961	56.0 211.0	33 26		50 70	
	HRR-1A	E-1		10.00	17.7 450	14.8 375	53.8 1368	15.9 405	26.0 660	362 225	170.0 1097					
14.00R25	EV-4S #	IND-4S	L	10.00x1.5	15.6 396	55.4 1407	17.1 434	24.6 624	379.2235.6	153.8 992	75.0 284.0	50 39				
14.00R25NHS *	EV-4A	IND-4		E	10.00	18.7 475	15.6 396	55.4 1407	17.7 450	22.7 577	444 276	190.0 1226	49 39			
	GP-2B	E-3			10.00	17.7 450	15.2 386	53.5 1359	15.5 394	24.4 620	393 244	152.0 981	33 26			
	RL-4J	E-4	N A	10.00	17.7 450	15.3 389	55.6 1412	16.7 424	25.9 658	377 234	154.0 994	68.2 258.1	48 38	85 120	65 95	
	RL-4L	E-4	N	10.00	17.7 450	14.7 373	55.5 1410	16.8 427	24.6 625	378 236	167.0 1079	66.4 251.3	47 37			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS		PSI	76	80	83	87	91	94	98	102	105	109	112	116	123	141
		KPA	525	550	575	600	625	650	675	700	725	750	775	800	850	975
14.00-25NHS	LBS	15700	16100	16500	17100	17600	18200	18200	18700(20)	19300	19300	19800	20400	20900(24)	22700(28)▲	
	KG	7100	7300	7500	7750	8000	8250	8250	8500(20)	8750	8750	9000	9250	9500(24)	10300(28)▲	
RADIAL	PSI	76	80	83	87	91	94	98	102	105	109	112	116	120	131	
	KPA	525	550	575	600	625	650	675	700	725	750	775	800	825	900	
14.00R25NHS	LBS	14800	15200*	15700	16500	17100	17600	17600	18200	18700	19300	19800	20400	20900**	22000***▲	
	KG	6700	6900*	7100	7500	7750	8000	8000	8250	8500	8750	9000	9250	9500**	10000***▲	

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS		PSI	51	54	58	62	65	69	73	76	80	83	87	91	94
		KPA	350	375	400	425	450	475	500	525	550	575	600	625	650
14.00-25NHS	LBS	8550	8800(16)	9350	9650	9900	10200(20)	10500	10700	11000(24)	11400	11700	12000	12300(28)	
	KG	3875	4000(16)	4250	4375	4500	4625(20)	4750	4875	5000(24)	5150	5300	5450	5600(28)	
RADIAL	PSI	65	69	73	76	80	83	87	91	94	98	102	105	109	112
	KPA	450	475	500	525	550	575	600	625	650	675	700	725	750	775
14.00R25NHS	LBS	8800	9100*	9650	9900	10200	10500	11000	11400	11700	12000	12300**	12300	12800	13200
	KG	4000	4125*	4375	4500	4625	4750	5000	5150	5300	5450	5600**	5600	5800	6000

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS		PSI	51	54	58	62	65	69
		KPA	350	375	400	425	450	475
14.00-25ML	LBS	8550	8800(H)	9350	9650	9900	10200(L)	
	KG	3875	4000(H)	4250	4375	4500	4625(L)	

### 50 MPH (80 KM/H) MAXIMUM SPEED OFF-THE-ROAD MINING AND LOGGING SERVICE

BIAS		PSI	55	60	65	70	75	80	85	90	95	100
		KPA	380	410	450	480	520	550	590	620	660	690
14.00-25ML	LBS	7560	7960	8340	8820(H)	9070	9410	9920(J)	10090	10410	11000(L)	
	KG	3430	3610	3780	4000(H)	4110	4270	4500(J)	4580	4720	5000(L)	

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
16.00-25	ELV-3A	IND-3	L A	11.25-2.0	20.2 513	17.4 442	58.1 1476	19.2 488	26.9 683	353 219	195.0 1258	80.0 302.0	37 29			
	ELV-3C	IND-3		A	11.25-2.0	20.4 518	16.6 422	59.4 1509	18.4 467	27.3 692	349 217			61 52		
	ELV-4/5A	IND-4			11.25-2.0	20.2 513	17.4 442	59.9 1521	19.4 493	27.6 701	353 219	200.0 1290			66 52	
	HRL-3A	E-3	N L E A		11.25-2.0	20.2 513	17.4 442	58.1 1476	19.2 488	26.9 683	353 219	195.0 1258	80.0 302.0	37 29		70 100
	HRL-4B	E-4	N L		11.25-2.0	20.2 513	17.2 437	59.9 1521	18.8 478	28.0 711	339 211	190.0 1226	78.0 295.0	67 53	90 130	65 95
	HRR-1A	E-1			11.25-2.0	20.2 513	16.8 427	57.1 1450	18.4 467	26.5 673	358 222	186.0 1200		37 29	125 180	90 130
	SMO-5A	L-5S		E	11.25-2.0	20.2 513	17.4 442	59.9 1521	19.2 488	27.6 701	343 213	203.0 1310		89 70		

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	Continued
16.00-25	LBS KG	<b>19300</b> 8750	<b>19800</b> 9000	<b>20400</b> 9250	<b>21500(20)</b> 9750(20)	<b>22000</b> 10000	<b>22700</b> 10000	<b>23400(24)</b> 10300	<b>24000</b> 10600(24)	<b>24700</b> 10900	<b>24700</b> 11200	<b>24700</b> 11200	<b>25400(28)</b> 11500(28)	<b>26000</b> 11800	<b>26800</b> 12150	<b>26800</b> 12150	
	PSI KPA	<b>123</b> 850	<b>127</b> 875	<b>131</b> 900	<b>134</b> 925	<b>138</b> 950	<b>141</b> 975	<b>145</b> 1000	<b>149</b> 1025	▲							
	LBS KG	<b>27600</b> 12500	<b>27600(32)</b> 12500(32)	<b>28300</b> 12850	<b>29100</b> 13200	<b>29100</b> 13200	<b>30000(36)</b> 13600(36)	<b>30000</b> 13600	<b>30900</b> 14000	<b>32000(40)▲</b> 14500(40)▲							

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	94 650	
16.00-25	LBS KG	<b>9650</b> 4375	<b>10200</b> 4625	<b>10700</b> 4875	<b>11000</b> 5000	<b>11700</b> 5300	<b>12000(20)</b> 5450(20)	<b>12300</b> 5600	<b>12800</b> 5800	<b>13200(24)</b> 6000(24)	<b>13900</b> 6300	<b>14300</b> 6500	<b>14300</b> 6500	<b>14800(28)</b> 6700(28)	<b>16100(32)</b> 7300(32)	

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
16.00R25	EV-3+	IND-3+	E N N N L N N N E N E E L-3 E-2 E-3+	E	11.25-2.0	<b>20.2</b> 513	17.2 437	<b>59.1</b> 1501	<b>19.2</b> 488	27.1 687	355 221	<b>202.0</b> 1303	94.7 358.3	50 40	80 120 70 100	
	EV-4A (24/24)	IND-4		N E	11.25-2.0	<b>20.2</b> 513	17.7 450	<b>60.4</b> 1534	<b>20.5</b> 521	<b>26.9</b> 683	348 216	<b>282.0</b> 1819	100.0 379.0	58 46		
	EV-4A 00/12	IND-4		N E	11.25-2.0	<b>20.2</b> 513	17.7 450	<b>60.4</b> 1534	<b>20.5</b> 521	<b>26.9</b> 683	348 216	<b>282.0</b> 1819	100.0 379.0	58 46		
	EV-4B+	IND-4			11.25-2.0	<b>20.2</b> 513	17.1 435	<b>60.2</b> 1530	<b>19.1</b> 486	<b>26.5</b> 673	349 217	<b>200.0</b> 1290		69 55		
	EV-4C #	IND-4		L	11.25x2.0		17.1 435	<b>60.2</b> 1530	<b>18.8</b> 479	<b>26.7</b> 678	<b>348.8</b> 216.7	<b>317.2</b> 1903	99.0 374.0	63 50		
	EV-4K 00/12	IND-4			11.25-2.0	<b>20.2</b> 513	17.7 450	<b>60.2</b> 1529	<b>19.5</b> 496	<b>26.7</b> 678	349 217	<b>200.0</b> 1290		65 51		
	EV-4K 12/12	IND-4			11.25-2.0	<b>20.2</b> 513	17.7 450	<b>60.2</b> 1529	<b>19.5</b> 496	<b>26.7</b> 678	349 217	<b>200.0</b> 1290		65 51		
	EV-4R	IND-4		N E	11.25-2.0		17.1 435	<b>60.2</b> 1530	<b>20.3</b> 515	<b>26.5</b> 673	349 217	<b>283.0</b> 1827	97.0 366.0	63 50		
	EV-4S	IND-4S		N A	11.25-2.0	<b>20.2</b> 513	17.7 450	<b>60.2</b> 1529	<b>19.5</b> 496	<b>26.7</b> 678	349 217	<b>200.0</b> 1290	93.9 355.7	71 56		
	EV-5K	IND-5			11.25-2.0	<b>20.2</b> 513	17.7 450	<b>60.2</b> 1529	<b>19.5</b> 496	<b>26.7</b> 678	349 217	<b>200.0</b> 1290		90 72		
	EV-5S	IND-5S			11.25-2.0	<b>20.2</b> 513	17.7 450	<b>60.2</b> 1529	<b>19.5</b> 496	<b>26.7</b> 678	349 217	<b>200.0</b> 1290	86.7 328.2	90 72		
	GP-2B	E-3		E	11.25-2.0	<b>20.2</b> 513	17.2 438	<b>58.6</b> 1489	<b>19.0</b> 482	<b>27.3</b> 693	358 223		96.2 364.3	34 27		
	GP-2B	L-3		E	11.25-2.0	<b>20.2</b> 513	17.2 438	<b>58.6</b> 1489	<b>19.0</b> 482	<b>27.3</b> 693	358 223		96.2 364.3	34 27		
	RL-2F	E-2			11.25-2.0	<b>20.2</b> 513	17.6 447	<b>59.0</b> 1499	<b>19.3</b> 490	<b>26.9</b> 683	356 221	<b>200.0</b> 1290	98.1 371.5	32 25	130 190 100 150	
	RL-3+	E-3+		N E A	11.25-2.0	<b>20.2</b> 513	17.2 437	<b>59.1</b> 1501	<b>19.2</b> 488	<b>27.1</b> 687	355 221	<b>202.0</b> 1303	94.7 358.3	50 40	115 170 85 120	

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	131 900
16.00R25	LBS KG	19300 8750	19800* 9000*	20400 9250	21500 9750	22000 10000	22700 10300	23400 10600	24000 10900	24700 11200	25400 11500	26000 11800	26800 12150	26800** 12150**	29100*** 13200***

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700		
16.00R25	LBS KG	11400 5150	12000* 5450*	12300 5600	12800 5800	13200 6000	13900 6300	14300 6500	14800 6700	15200 6900	15700 7100	16100** 7300**		

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
18.00-25	EAW-7A	E-7		13.00-2.5	23.1 587	20.2 513	63.2 1605	22.5 572	28.5 724	330 205	282.0 1820		22 17			
	ELV-3A	IND-3		13.00-2.5	23.1 587	20.4 518	63.2 1605	22.5 572	29.3 744	321 199	274.0 1768	124.2 470.0	39 31			
	ELV-4/5A	IND-4	N	13.00-2.5	23.1 587	20.8 529	66.5 1689	24.0 609	28.9 733	312 191	334.0 2186		66 52			
	ELV-4B	IND-4	N L A	13.00-2.5	23.1 587	20.8 529	65.8 1671	22.8 580	30.0 761	309 192	269.0 1732	122.2 462.6	69 55			
	ELV-4C	IND-4		13.00-2.5	23.1 587	20.4 518	65.4 1661	22.8 580	30.1 764	311 193	265.0 1710		82 65			
	ELV-4D	IND-4	A	13.00-2.5	23.1 587	20.4 518	66.0 1677	23.7 602	30.8 782	312 194	340.0 2192		79 63			
	ELV-5C	IND-5		13.00-2.5	23.1 587	20.4 518	65.4 1661	22.8 580	30.1 765	311 190	265.0 1710		114 90			
	ELV-5D	IND-5S	N L E A	13.00-2.5	23.1 587	20.4 518	66.0 1677	23.7 602	30.8 782	312 194	340.0 2192		112 90			
	ELV-5E	IND-5		13.00-2.5	23.1 587	20.7 526	64.7 1643	21.9 556	29.9 760	321 199	255.0 1645		99 79			
	HRL-3A	E-3	L E A	13.00-2.5	23.1 587	20.4 518	63.6 1615	22.5 572	29.3 744	321 199	274.0 1768	131.8 498.9	39 31	125 180	90 130	
	HRL-4B	E-4	N L E A	13.00-2.5	23.1 587	20.3 516	65.2 1656	22.1 561	30.4 772	310 193	235.0 1516	122.2 462.6	70 56		80 120	
	HRR-1A	E-1		13.00-2.5	23.1 587	20.5 521	63.8 1621	22.9 582	29.2 742	323 201	233.0 1503		39 31	145 210	100 150	
	MRL-4B	E-4	L	13.00-2.5	23.1 587	20.3 516	65.2 1656	22.1 561	30.4 772	310 193	235.0 1516		74 59			
	SG	E-2	N	13.00-2.5	23.1 587	20.3 516	63.2 1605	22.4 569	28.8 732	327 203	279.0 1800	113.0 426.0	39 31		100 150	
	SG	G-2	N	13.00-2.5	23.1 587	20.3 516	63.2 1605	22.4 569	28.8 732	327 203	279.0 1800	113.0 426.0	39 31		100 150	
	SMO-5C	L-5S	N L A	13.00-2.5	23.1 587	20.4 518	65.4 1661	22.8 580	30.1 765	311 190	265.0 1710	119.0 450.3	114 90			
	SMO-5D	L-5S	N L E A	13.00-2.5	23.1 587	20.6 523	65.6 1666	22.2 564	30.2 767	312 191	265.0 1710	119.0 450.3	112 90			
	SMO-5E	L-5S	N	13.00-2.5	23.1 587	21.5 546	64.7 1643	22.1 561	28.9 734	321 199	255.0 1645		99 79			
	SRB-7A	E-7	N A	10.00-1.5	21.7 551	18.8 478	60.5 1537	21.2 539	27.2 691	345 214	240.0 1548	123.1 466.0	16 13		160 230	

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	Continued
18.00-25	LBS KG	25400(20) 11500(20)	26000 11800	26800 12150	27600(24) 12500(24)	28300 12850	29100 13200	30000 13600	30000(28) 13600(28)	30900 14000	32000 14500	32000 14500	33100(32) 15000(32)	33100 15000	34200 15500	35300 16000	
	PSI KPA	123 850	127 875	131 900	134 925	138 950											
	LBS KG	35300(36) 16000(36)	36400 16500	36400 16500	37500 17000	37500(40) 17000(40)											

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250
18.00-25	LBS KG	8550 3875	9100(12) 4125(12)	9900 4500	11000(16) 5000(16)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	102 700	
18.00-25	LBS KG	12300(16) 5600(16)	13200 6000	13900 6300	14300(20) 6500(20)	15200 6900	15700 7100	16100(24) 7300(24)	16500 7500	17100 7750	17600(28) 8000(28)	18200 8250	18700 8500	19300(32) 8750(32)	21500(40) 9750(40)	

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250	
18.00-25	LBS KG	4940 2240	5840 2650	6610 3000	7390 3350	8050 3650	8820 4000	9370 4250	9920 4500	

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

## RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
18.00R25	EV-3+	IND-3+	N E A	13.00-2.5	<b>23.1</b> 587	20.1 511	64.5 1638	21.7 551	29.2 742	329 204	248.0 1600	135.7 513.7	53 42			
	EV-3G #	IND-3	N L E A	13.00/2.5		20.1 510	64.6 1640		194.6 709			135.8 514.0	44 35			
	EV-4C #	IND-4	L	13.00-2.5		19.5 495	65.7 1669	21.6 549	28.9 735	317.6 197.3	276.8 1786	125.0 473.0	81 64			
	EV-4K	IND-4	N E	13.00-2.5	<b>23.1</b> 587	20.2 513	65.8 1671	21.9 557	30.6 776	319 198	349.0 2252	132.3 500.9	68 54			
	EV-4R #	IND-4	L	13.00-2.5		19.5 495	65.7 1669	21.6 549	28.9 735	317.6 197.3	276.8 1786	125.0 473.0	73 57.9			
	EV-4S	IND-4S	N E A	13.00-2.5	<b>23.1</b> 587	20.4 517	65.9 1674	21.9 557	28.9 735	319 198	350.0 2261	132.3 500.9	79 63			
	EV-4S Gen II	IND-4	N E A	13.00 - 2.5	<b>23.6</b> 600	19.6 498	66.1 1679			29.1 739	319 198	276.8 1786		86 68		
	EV-5K	IND-5	E	13.00-2.5	<b>23.1</b> 587	20.2 513	65.8 1671	21.9 557	29.8 757	319 198	302.0 1948	132.1 500.0	99 78			
	EV-5S	IND-5S	N E	13.00-2.5	<b>23.1</b> 587	20.2 513	65.8 1671	21.9 557	30.6 776	319 198	327.0 2110	119.4 452.0	114 90			
	RL-2F	E-2		13.00-2.5	<b>23.1</b> 587	19.6 498	63.6 1615	21.5 546	28.9 734	330 205	263.0 1696	136.7 517.3	37 29	170 250	130 190	
	RL-3+	E-3+	N E A	13.00-2.5	<b>23.1</b> 587	<b>20.1</b> 511	64.5 1638	21.7 551	29.2 742	329 204	248.0 1600	135.7 513.7	53 42	155 230	115 170	95 140
	RL-4	E-4	N E	13.00-2.5	<b>23.1</b> 587	19.9 505	65.2 1656	21.8 554	29.8 757	322 200	271.0 1748	138.7 525.1	68 54	125 180	95 140	75 110
	RL-4B	E-4		13.00-2.5	<b>23.1</b> 587	<b>20.0</b> 508	65.2 1656	21.8 554	28.7 730	322 200	271.0 1748	138.7 525.1	68 54	130 190	100 150	80 120
	RL-4J	E-4	N A	13.00-2.5	<b>23.1</b> 587	<b>20.3</b> 516	65.4 1661	22.1 561	30.1 765	322 200	250.0 1613	137.1 518.9	68 54	130 190	100 150	
	RL-5K	L-5	N E	13.00-2.5	<b>23.1</b> 587	<b>20.2</b> 513	65.8 1671	21.9 557	30.6 776	319 198	349.0 2252	119.4 452.0	99 78			
	RL-5S	L-5S	N E	13.00-2.5	<b>23.1</b> 587	<b>20.2</b> 513	65.8 1671	21.9 557	30.6 776	319 198	327.0 2110	119.4 452.0	99 78			
	SM-5A	L-5S		13.00-2.5	<b>23.1</b> 587	<b>20.2</b> 513	65.8 1671	21.9 557	30.6 776	319 198						

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	131 900
18.00R25	LBS KG	24700 11200	26000* 11800*	26800 12150	27600 12500	28300 12850	29100 13200	30000 13600	30900 14000	32000 14500	33100 15000	33100 15000	34200 15500	35300** 16000**	37500*** 17000***

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

RADIAL	PSI KPA	36 250	40 275	44 300	47 325	51 350
18.00R25	LBS KG	9650 4375	10500 4750	11000 5000	11700 5300	12300* 5600*

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700
18.00R25	LBS KG	14800 6700	15700* 7100*	16100 7300	16500 7500	17100 7750	17600 8000	18200 8250	18700 8500	19300 8750	19800 9000	20400** 9250**

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
21.00-25	ELV-3A	IND-3	N L E A	15.00-3.0	26.3 668	22.8 579	69.0 1753	26.1 663	31.2 805	297 185	323.0 2084	174.0 658.0	44 35			
	ELV-3C #	IND-3		15.00-3.0		23.8 605	69.0 1753	26.1 663	31.2 793	297 185	323.0 2084	174.0 658.0	45 36			
	ELV-5A	IND-5S		15.00-3.0	26.3 668	22.8 579	69.0 1753	24.8 630	31.9 810	295 183	336.0 2168		107 85			
	HRL-3A	E-3		15.00-3.0	26.3 668	23.6 599	69.4 1763	26.1 663	31.7 805	297 185	323.0 2084	174.0 658.0	44 35			
	SGL-2A	E-2		15.00-3.0	26.3 668	23.9 607	66.7 1694	26.5 673	29.7 754	316 196	370.0 2387	152.0 576.0	41 33		140 200	
	SMO-5A	L-5S		15.00-3.0	26.3 668	22.8 579	69.0 1753	24.8 630	31.9 810	295 183	336.0 2168	140.2 530.9	125 99		^40 ^60	
	SMO-5C	L-5S		15.00-3.0	26.3 668	22.8 579	69.0 1753	24.8 630	31.9 810	295 183	336.0 2168	140.2 530.9	125 99		40 60	
	SRB-7A	E-7		15.00-3.0	26.3 668	23.6 599	66.9 1699	25.5 648	29.3 744	325 202	294.0 1897	206.0 781.0	16 12		185 270	
21.00R25	SR-7A	E-7		15.00-3.0	26.3 688	23.7 604	68.9 1750	26.4 672	31.0 787	305 190	304.0 1963	207.2 784.5	33 27			
22-25	SGL D/L-2A	L-2		14.00-1.5		21.7 551	53.9 1370	23.0 584	24.0 610	396 246	315.0 2032		31 24		60 90	
23/90-25	SMO-5C	L-5S	N A	15.00-2.5		22.8 579	65.5 1664	24.8 630	30.2 767	312 191	305.0 1968		114 90			
61X18.00-25	R Tow Sv	IND-3		13.00-2.5		19.4 493	61.6 1565	21.3 541	28.0 711	336 209	293.0 1890		40 32	150 219		

53

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	73 500	78 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825
21.00-25	LBS KG	33100(24) 15000(24)	34200 15500	35300 16000	36400(28) 16500(28)	37500 17000	37500 17000	38600(32) 17500(32)	39700 18000	40800 18500	41900(36) 19000(36)	43000 19500	43000 19500	44100 20000	45400(40) 20600(40)
	PSI KPA	112 775	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	116 800	120 825	131 900	
21.00R25	LBS KG	4300 19500	33100* 15000*	34200 15500	35300 16000	36400 16500	37500 17000	38600 17500	39700 18000	40800 18500	41900 19000	44100 20000	45400** 20600**	48100*** 21800***	
	PSI KPA	36 250	40 275	44 300	47 325	51 350	54 375								
22-25	LBS KG	13850 6375	14600(12) 6700(12)	15350 7025	16100 7350	16850 7675	17600(16) 8000(16)								
	PSI KPA	73 500	78 525	80 550	83 575	87 600	91 625	94 650	98 675						
23/90-25	LBS KG	29100 13200	30000 13600	30900 14000	32000(30) 14500(30)	32000 14500	33100 15000	34200 15500	35300(36) 16000(36)						
	PSI KPA	116 800	120 825	123 850	127 875	131 900	134 925	138 950	141 975	145 1000	149 1025	152 1050			
61X18.00-25	LBS KG	33100 15000	33100 15000	34200 15500	34200 16000	35300 16000	35300 16500	36400 16500	36400 16500	37500 17000	37500 17000	38600(44) 17500(44)			

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500				
21.00-25	LBS KG	16100 7300	17100 7750	17600 8000	18700 8500	19300(24) 8750(24)	19800 9000	20900(28) 9500(28)	21500 9750	22000 10000	22700(32) 10300(32)				
	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700			
21.00R25	LBS KG	19800 9050	20400* 9250*	20900 9500	22000 10000	22700 10300	23400 10600	24000 10900	25400 11500	26000 11800	26800 12150	27600** 12500**			
	PSI KPA	25 175	29 200												
22-25	LBS KG	7940(12) 3600(12)	9660(16) 4380(16)												

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250						
21.00-25	LBS KG	6390 2900	7610 3450	8540 3875	9650 4375	10470 4750	11350 5150	12020 5450	12790 5800						

#### Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
18.00-33	ELV-3A	IND-3	N L A	13.00-2.5	23.1 587	20.4 518	71.9 1826	22.5 572	33.4 848	282 175	287.0 1852	148.6 562.5	39 31	150 220	110 160	85 120
	ELV-4B	IND-4		13.00-2.5	23.1 587	20.3 516	73.4 1864	22.5 572	33.4 848	273 170	287.0 1852	146.1 553.0	70 56			
	HRL-3A	E-3		13.00-2.5	23.1 587	20.4 518	71.9 1826	22.5 572	33.4 848	282 175	287.0 1852	148.6 562.5	39 31			
	HRL-4B	E-4		13.00-2.5	23.1 587	20.3 516	73.4 1864	22.2 564	34.4 874	273 170	270.0 1742	146.1 553.0	70 56			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	120 825
18.00-33	LBS KG	29100 13200	30000 13600	30900 14000	32000(24) 14500(24)	33100 15000	33100 15000	34200 15500	35300(28) 16000(28)	36400 16500	36400 16500	37500 17000	38600(32) 17500(32)	40800(36) 18600(36)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	Continued
18.00-33	LBS KG	14300 6500	15200 6900	16100 7300	16500 7500	17600 8000	18200 8250	18700(24) 8500(24)	19300 8750	19800 9000	20400(28) 9250(28)	21500 9750	22000 10000	22700(32) 10300(32)	22700 10300	23400(36) 10600(36)	
	PSI KPA	94 650	98 675	102 700													
	LBS KG	24000 10900	24700 11200	25400(40) 11500(40)													

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

## DIMENSIONAL DATA

### RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
18.00R33	EV-3+	IND-3+	N E	13.00-2.5	23.1 587	19.5 495	72.5 1824	21.9 556	33.1 841	293 182	295.0 1903	160.6 607.9	53 42			
	EV-4J #	IND-4		13.00-2.5	23.1 587	20.2 513	73.8 1875	22.6 574	34.1 866	285 177	440.0 2841	154.8 586.0	67 53			
	EV-4S	IND-4S		13.00-2.5	23.1 587	19.5 495	71.8 1824	21.9 556	33.1 841	293 182	295.0 1903	160.6 607.9	68 54			
	EV-S4S	IND-4S		13.00-2.5	23.1 587	20.2 513	73.6 1869	22.4 570	32.9 835	285.4 177.4	338.3 2182		68 54			
	EV-S5S	IND-5S		13.00-2.5	23.1 587	20.2 513	73.7 1873		32.7 831	285 177	396.0 2555		114 90			
	GP-4C #	E-4		13.00-2.5	23.1 587	20.2 513	73.2 1858	22.2 564	32.7 831	287 178	308.0 1984	175.0 662.0	70 56			
	RL-2F	E-2		13.00-2.5	23.1 587	19.5 495	71.7 1821	21.7 551	32.8 833	293 182	290.0 1871	159.5 603.7	37 29	200 290	150 220	
	RL-3+	E-3+		13.00-2.5	23.1 587	19.5 495	71.8 1824	21.9 556	33.1 841	293 182	295.0 1903	160.6 607.9	53 42	180 260	135 200	110 160
	RL-4	E-4		13.00-2.5	23.1 587	20.2 513	73.0 1854	21.7 551	33.6 853	288 179	296.0 1910	164.3 621.8	68 54	150 220	115 170	90 130
	RL-4B	E-4	N A	13.00-2.5	23.1 587	20.0 507	73.2 1858	22.2 564	33.7 856	287 178	310.0 1997	175.0 662.0	68 54	155 230	120 175	90 130
	RL-4F	E-4		13.00-2.5	23.1 587	20.2 513	73.6 1868	22.6 574	34.0 864	285 177	302.0 1949	160.7 608.2	59 47	140 200	105 150	85 120
	RL-4H	E-4	N A	13.00-2.5	23.1 587	19.7 501	73.7 1871	22.2 563	34.1 866	285 177	290.0 1870	154.7 585.7	68 54	155 230	120 175	90 130
	RL-4J	E-4		13.00-2.5	23.1 587	19.7 501	73.7 1871	22.2 563	34.1 866	285 177	290.0 1870	154.7 585.7	68 54	155 230	120 175	90 130
	RM-4B+	E-4+	N L E A	13.00 - 2.5		20.0 508	73.2 1859		34.0 864	287 178	298.0 1923		81 64			
	RT-4A	E-4	E	13.00-2.5	23.1 587	20.2 513	73.5 1867	22.9 582	32.8 833	286 178	337.0 2175	175.0 662.0	68 54	160 230	125 180	94 140
21.00R33	RL-4B	E-4	N E A	15.00-3.0	26.3 667	23.8 605	78.3 1988	26.8 681	34.8 884	268 167	435.0 2806	225.0 852.0	68 54	205 300	160 230	127 190

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	131 900
18.00R33	LBS KG	29100 13200	30000* 13600*	30900 14000	32000 14500	33100 15000	34200 15500	35300 16000	36400 16500	36400 16500	37500 17000	38600 17500	39700 18000	40800** 18500**	43000*** 19500***
RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	
21.00R33	LBS KG	37500 17000	38600* 17500*	39700 18000	40800 18500	41900 19000	43000 19500	44100 20000	45400 20600	46700 21200	48100 21800	49400 22400	50700 23000	52000** 23600**	

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	Continued
18.00R33	LBS KG	17100 7750	17600* 8000*	18700 8500	19300 8750	19800 9000	20400 9250	21500 9750	22000 10000	22700 10300	23400 10600	24000** 10900**	24700 11200	25400 11500	26000 11800	26800 12150	
RADIAL	PSI KPA	120 825															
	LBS KG	26800*** 12150***															
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700					
21.00R33	LBS KG	22000 10000	22700* 10300*	24000 10900	24700 11200	25400 11500	26000 11800	27600 12500	28300 12850	29100 13200	30000 13600	30900** 14000**					

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



RL-2F



RL-3+



RL-4B



RL-4H

RL-4HII



RL-4J

RL-4JII



RM-4B+

### DIMENSIONAL DATA

#### BIAS



ELV-4B



ELV-4S



HRL-3A



HRL-4B



MRL-4B

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY			
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph	
21.00-35	ELV-4B	IND-4	N L A	15.00-3.0	27.6 701	24.0 610	80.2 2037	26.2 665	37.2 945	253 157	366.0 2361	213.1 806.6	70 56				
	ELV-4S	IND-4S		15.00-3.0	27.6 701	23.8 605	80.1 2035	26.2 665	37.2 945	253 157	366.0 2361		76 60				
	HRL-3A	E-3		15.00-3.0	27.6 701	23.6 599	78.6 1996	26.0 660	36.5 927	258 160	363.0 2342	198.0 749.0	44 35	200 290	145 210		
	HRL-4B	E-4		15.00-3.0	27.6 701	24.0 610	80.2 2037	26.2 665	37.2 945	253 157	366.0 2361	213.1 806.6	70 56	180 260	130 190	110 160	
	MRL-4B	E-4		15.00-3.0	27.6 701	23.8 605	80.1 2035	26.2 665	37.2 945	253 157	366.0 2361		76 60		115 170		
21.00R35	RL-2F	E-2	A	15.00-3.0	27.6 701	22.9 582	78.4 1991	25.2 640	35.9 912	268 167	380.0 2452	224.4 849.5	40 32	275 400	210 300		
	RL-3+	E-3+		15.00-3.0	27.6 701	23.1 587	79.3 2014	25.7 653	36.3 922	265 165	362.0 2336	231.7 877.1	56 44	245 360	185 270	145 200	
	RL-4B	E-4		N	15.00-3.0	27.6 701	23.6 599	80.2 2036	26.4 670	35.8 908	262 163	399.0 2579	250.0 496.0	70 56	215 310	165 240	130 190
	RL-4F	E-4			15.00-3.0	27.6 701	23.3 592	80.9 2055	26.1 664	36.9 937	260 162	380.0 2450	231.7 877.1	68 54	200 290	150 220	120 180
	RL-4H	E-4		N A	15.00-3.0	27.6 701	23.2 590	80.4 2042	26.7 678	37.0 940	261 162	367.0 2368	242.8 919.1	68 54	215 310	165 240	130 190
	RL-4HII	E-4		N A	15.00-3.0	27.6 701	23.2 590	80.4 2042	26.7 678	37.0 940	261 162	367.0 2368	242.8 919.1	68 54	215 310	165 240	130 190
	RL-4J	E-4		N E A	15.00-3.0	27.6 701	23.2 590	80.4 2042	26.7 678	37.0 940	261 162	367.0 2368	239.5 906.6	68 54	215 310	165 240	130 190
	RL-4JII	E-4			15.00-3.0	27.6 701	23.2 590	80.4 2042	26.7 678	37.0 940	261 162	367.0 2368	239.5 906.6	68 54	215 310	165 240	130 190
	RM-4B+	E-4+		N L E A	15.00/3.5	29.3 743	23.6 599	80.2 2037		35.8 909		398.9 2574		86 68	226 330	174 253	134 195
24.00-35	HRL-3A	E-3	A	17.00-3.5	31.3 795	26.6 676	84.5 2146	29.4 747	38.7 983	243 151	457.0 2949	240.0 910.0	49 39		175 260		
	HRL-4B	E-4		N L A	17.00-3.5	31.3 795	26.7 678	86.0 2184	29.2 742	39.7 1008	237 147	439.0 2832	223.3 843.0	73 58	205 300	160 230	
	MRL-4B	E-4		N A	17.00-3.5	31.3 795	26.3 668	86.4 2195	29.2 742	39.7 1008	237 147	468.0 3019	270.2 1022.6	87 69		140 200	

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

#### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	120 825
21.00-35	LBS KG	38600 17500	39700 18000	40800 18500	41900 19000	43000(28)	44100	45400	46700(32)	46700	48100	49400	50700(36)	53600(40)
RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825
21.00R35	LBS KG	38600 17500	39700* 18000*	40800 18500	41900 19000	43000 19500	44100 20000	45400 20600	46700 21200	48100 21800	49400 22400	50700 23000	52000 23600	53600** 24300**
BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	
24.00-35	LBS KG	49400 22400	50700 23000	52000(30) 23600(30)	53600 24300	55100 25000	56800 25750	58400 26500	58400(36) 26500(36)	60000 27250	61500 28000	64000 29000	64000(42) 29000(42)	

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550
21.00R35	LBS KG	12000 5450	13200 6000	14300 6500	15200 6900	16500 7500	17600 8000	18700* 8500*	19300 8750	20400 9250	21500 9750	22000 10000	23400 10600	24000 10900	25400 11500	26000** 11800**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625
21.00-35	LBS KG	19300 8750	19800 9000	20900 9500	22000 10000	22700 10300	24000 10900	24700(28) 11200(28)	25400 11500	26000 11800	26800(32) 12150(32)	27600 12500	28300(36) 12850(36)	29100 13200	30000 13600	30900(40) 14000(40)
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700				
21.00R35	LBS KG	22700 10300	23400* 10600*	24700 11200	25400 11500	26000 11800	26800 12150	28300 12850	29100 13200	30000 13600	30900 14000	32000** 14500**				
BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625
24.00-35	LBS KG	24700 11200	26000 11800	26800 12150	28300 12850	29100 13200	30900(30) 14000(30)	32000 14500	33100 15000	34200(36) 15500(36)	34200 15500	35300 16000	36400 16500	37500(42) 17000(42)	38600 17500	39700 18000
	PSI KPA	94 650														
	LBS KG	40800(48) 18500(48)														

60

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY				
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph		
24.00R35	GT-4B #	E-4	A	17.00-3.5	31.3 795	27.4 696	86.4 2195	30.5 775	38.8 985	243 151	522.8 3373	325.0 1230.0	84 67	260# 380#	200# 290#	155# 230#		
	GT-4B #	E-4+		17.00-3.5	31.3 795	27.4 696	86.4 2195	30.5 775	38.8 985	243 151	522.8 3373	325.0 1230.0	84 67	260# 380#	200# 290#	155# 230#		
	RL-2F	E-2		17.00-3.5	31.3 795	26.2 665	83.5 2121	28.8 732	37.9 963	252 156	480.0 3097	300.4 1136.8	46 37	335 490	255 370			
	RL-3+	E-3+		N E	17.00-3.5	31.3 795	25.9 658	84.0 2134	29.1 739	38.2 970	250 155	465.0 3001	310.7 1176.2	60 48	300 440	230 340	180 260	
	RL-4B	E-4		N	17.00-3.5	31.3 795	26.9 683	86.4 2205	30.5 774	39.3 998	243 151	531.0 3428	300.0 1136.0	72 57	270 390	205 300	160 230	
	RL-4F	E-4			17.00-3.5	31.3 795	27.5 699	86.0 2184	30.5 775	39.2 996	244 152	480.0 3097	333.9 1263.8	72 57	245 360	185 270	145 210	
	RL-4HII	E-4		N	A	17.00-3.5	31.3 795	27.2 691	86.2 2190	30.1 765	39.5 1003	244 152	477.0 3077	332.9 1260.2	71 56	270 390	205 300	160 230
	RL-4J	E-4		N E	17.00-3.5	31.3 795	27.2 691	86.2 2190	30.1 765	39.5 1003	244 152	477.0 3077	332.9 1260.2	71 56	270 390	205 300	160 230	
	RL-4JII	E-4			17.00-3.5	31.3 795	27.2 691	86.2 2190	30.1 765	39.5 1003	244 152	477.0 3077	332.9 1260.2	71 56	270 390	205 300	160 230	
	RM-4B+ #	E-4+		E	17.00 x 3.5	31.3 794	26.9 683	86.4 2195	30.5 775	38.3 973	243.2 151.1	531.3 3428	300.0 1136.0	89 70	280# 410#	215# 315#	165# 240#	
	RT-4A+	E-4+		N E	17.00-3.5	31.3 795	26.6 676	85.6 2174	29.6 752	38.0 965	245 153	582.0 3754	300.0 1136.0	90 71	275 400	210 300	165 240	
24.00-43	HRL-4B	E-4		17.00-3.5	31.3 795	26.6 676	94.1 2390	29.3 744	43.6 1107	217 135	520.0 3355	338.0 1279.0	73 58		185 270			
18.00-49	HRL-3A	E-3		13.00-2.75	24.2 615	20.2 513	88.0 2235	22.7 577	41.2 1046	228 142	338.0 2181	205.0 778.0	39 31		130 190			
	HRL-4B	E-4		13.00-2.75	24.2 615	20.0 508	90.1 2289	22.4 569	42.3 1074	224 139	328.0 2116	188.0 710.0	70 56		115 170			
21.00-49	HRL-3B	E-3		15.00-3.0	27.6 701	23.6 599	93.2 2367	26.5 673	43.3 1100	210 131	453.0 2923	251.0 950.0	46 37		170 250			
	HRL-4B	E-4		15.00-3.0	27.6 701	23.4 594	94.5 2400	25.9 658	44.2 1123	213 132	429.0 2768	247.0 935.0	70 56		160 230			
24.00-49	HRL-3B	E-3	N A	17.00-3.5	31.3 795	26.4 671	98.7 2507	29.7 754	45.3 1151	208 129	573.0 3697	346.0 1309.7	50 40		200 290			
	HRL-4B	E-4	N L A	17.00-3.5	31.3 795	26.2 665	100.1 2543	29.4 747	46.3 1176	203 126	526.0 3394	330.5 1251.0	73 58		190 280	165 240		
	MRL-4B	E-4	N L	17.00-3.5	31.3 795	26.5 673	100.1 2543	29.4 747	46.3 1176	203 126	526.0 3394		87 69		165 240			
	MRL-4D	E-4	L A	17.00-3.5	31.3 795	27.5 699	100.7 2558		47.8 1214				92 73	234 340	175 260			

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

<u>Legend</u>	N = North America L = Latin America	E = Europe / Africa / Mid East A = Asia / Australia	# = Estimated Data * = Tube Type Tire	^ = Work Capability Factor
---------------	--	--	--	----------------------------

# LOAD LIMITS AT COLD INFLATION PRESSURES

## 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	131 900
RADIAL															
24.00R35	LBS KG	48100 21800	50700* 23000*	53600 24300	55100 25000	56800 25750	58400 26500	60000 27250	61500 28000	64000 29000	64000 29000	66000 30000	66000 30000	68000** 30750**	74000*** 33600***
BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750		
18.00-49	LBS KG	37500 17000	38600 17500	39700 18000	40800(24) 18500(24)	41900 19000	41900 19500	43000 20000(28)	44100(28) 20600	45400 21200	46700 21200	46700 21200	48100(32) 21800(32)		
21.00-49	LBS KG	46700 21200	48100 21800	49400 22400	50700 23000	52000 23600	53600 24300	55100 25000	55100(32) 25000(32)	56800 25750	58400 26500	60000 27250	60000(36) 27250(36)		
BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	
24.00-49	LBS KG	58400 26500	60000 27250	61500(30) 28000(30)	64000 29000	66000 30000	68000 30750	69500 31500	71500(36) 32500(36)	71500 32500	74000 33500	76000 33500	76000(42) 34500	82700(48) 37500(48)	

## 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700			
RADIAL															
24.00R35	LBS KG	29100 13200	30000* 13600*	30900 14000	32000 14500	34200 15500	35300 16000	36400 16500	37500 17000	38600 17500	39700 18000	40800** 18500**			
BIAS	PSI KPA	69 475	65 450	73 500	76 525	80 550	83 575	87 600	91 625	94 650					
24.00-43	LBS KG	27500(36) 17000(36)	36400 16500	38600 17500	39700 18000	40800 18500	41900(42) 19000(42)	43000 19500	44100 20000	45400(48) 20600(48)					
BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	
18.00-49	LBS KG	18200 8250	19300 8750	20400 9250	20900 9500	22000 10000	22700 10300	23400(24) 10600(24)	24700 11200	25400 11500	26000(28) 11800(28)	26800 12150	27600 12500	28300(32) 12850(32)	
BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550		
21.00-49	LBS KG	23400 10600	24000 10900	25400 11500	26800 12150	28700 12500	29100 13200	30000 13600	30900 14000	32000 14500	33100(32) 15000(32)	34200 15500	34200(36) 15500(36)		
BIAS	PSI KPA	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	
24.00-49	LBS KG	32000 14500	34200 15500	35300 16000	36480(30) 16500(30)	37500 17000	39700 18000	40800(36) 18500(36)	41900 19000	43000 19500	44100 20000	45400(42) 20600(42)	46700 21200	48100 21800	48100(48) 21800(48)

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



GP-2B



GP-4B



GT-4B



RH-4A+



RL-3+



RL-4



RL-4A



RL-4B



RL-4H



RL-4J



RM-4A+



RT-4A+

### BIAS



HRL-4B

## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
24.00R49	RL-3+	E-3+	N A	17.00-3.5	31.3 795	26.4 671	97.7 2482	29.1 739	44.6 1133	215 134	581.0 3748	370.2 1401.1	60 48	375 550	280 410	
	RL-4	E-4		17.00-3.5	31.3 795	27.2 691	98.8 2509	29.2 742	45.2 1148	213 132	590.0 3807	382.1 1444.3	72 57	260 380		
	RL-4B	E-4		17.00-3.5	31.3 795	27.0 685	100.2 2543	30.6 777	45.2 1148	210 130	615.0 3968	400.0 1514.0	73 58			
	RL-4J	E-4		17.00-3.5	31.3 795	27.3 693	100.2 2545	30.6 777	46.0 1163	210 130	586.0 3781	403.7 1528.0	73 58	320 470	245 360	190 280
27.00-49	HRL-3B	E-3	N L A	19.50-4.0	35.1 893	29.0 737	103.9 2639	32.2 818	47.9 1217	195 121	642.0 4142	430.0 1629.0	55 44	260 380		
	HRL-4B	E-4		19.50-4.0	35.1 893	29.2 742	105.9 2690	33.1 841	48.4 1229	191 119	645.0 4162	430.4 1629.2	85 67	310 450	235 345	175 255
	MRL-4D	E-4		19.50-4.0	35.1 893	29.7 754	105.7 2685	33.1 841	49.6 1260	196 122	639.0 4124	430.4 1629.2	95 75	190 280		
	MRL-4F	E-4		19.50-4.0	35.1 893	29.3 744	105.7 2685	33.2 843	48.8 1240	191 119	700.0 4516	450.6 1705.7	86 68			
	SHY-7A	E-7		19.50-4.0	35.1 893	29.6 752	102.9 2614	32.7 831	47.2 1199	198 123	718.0 4633		44 35		325 470	
27.00R49	GP-2B	E-3	N A	19.50-4.0	35.1 893	29.5 749	104.3 2648	33.6 853	47.6 1209	205 127	730.0 4710		52 41	450 660	375 550	
	GP-4B #	E-4		19.50-4.0	35.1 893	29.8 756	106.5 2705	33.8 859	47.8 1214	197 123	707.3 4563	529.5 2004.4	82 65	370# 540#	285# 415#	215# 315#
	GT-4B	E-4		19.50-4.0	35.1 893	30.1 764	106.9 2715	34.0 865	48.4 1230	196.5 122.1	832.0 5368	550.0 2082.0	89 70.6	360 525	275 400	210 305
	GT-4B	E-4+		19.50-4.0	35.1 893	30.1 764	106.9 2715	34.0 865	48.4 1230	196.5 122.1	832.0 5368	550.0 2082.0	89 70.6	360 525	275 400	210 305
	RH-4A+ #	E-4+		19.5/4.0	35.1 891	29.8 758	106.2 2697	33.9 861	48.7 1237	198 123	852.0 5500		105 83			
	RL-3+	E-3+		19.50-4.0	35.1 893	29.6 752	104.2 2647	33.3 846	47.4 1204	202 126	694.0 4477	506.0 1915.3	67 53	375 550	310 450	185 270
	RL-4	E-4		19.50-4.0	35.1 893	29.4 747	105.1 2670	33.6 853	47.9 1217	200 124	694.0 4477	525.3 1988.3	80 64	425 620	335 490	
	RL-4A #	E-4		19.50-4.0	35.1 893	29.9 760	106.5 2705	33.7 857	48.5 1232	197 123	732.5 4726	529.5 2004.4	82 65	350# 510#	270# 394#	210# 306#
	RL-4B	E-4		19.50-4.0	35.1 893	30.2 767	106.4 2703	34.2 868	47.8 1214	198 123	756.0 4879	550.0 2082.0	80 64	375 550	290 420	225 330
	RL-4H	E-4		19.50-4.0	35.1 893	29.6 752	106.5 2705	33.4 848	47.8 1214	198 123	704.0 4542	529.5 2004.4	81 64	345 500	265 385	200 295
	RL-4J	E-4		19.50-4.0	35.1 893	29.6 752	106.3 2700	33.4 848	48.7 1237	198 123	704.0 4543	529.5 2004.4	81 64	375 545	300 440	180 265
	RL-4JII	E-4		19.50-4.0	35.1 893	29.6 752	106.3 2700	33.4 848	48.7 1237	198 123	704.0 4543	529.5 2004.4	81 64	375 545	300 440	180 265
	RM-4A+	E-4+		19.50-4.0	35.1 893	29.8 758	106.2 2697	33.9 861	48.7 1238	198 123	852.0 5500	525.0 1987.0	96 75	410 600	320 465	250 360
	RT-4A+	E-4+		19.50-4.0	35.1 893	29.3 744	106.2 2698	33.0 839	47.7 1211	198 123	787.0 5079	525.0 1987.0	95 75	410 600	320 465	250 360

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825
RADIAL														
24.00R49	LBS KG	58400 26500	60000* 27250*	61500 28000	64000 29000	66000 30000	68000 30750	69500 31500	71500 32500	74000 33500	76000 34500	78500 35500	80500 36500	82500** 37500**
27.00R49	LBS KG	71500 32500	74000* 33500*	76000 34500	78500 35500	82500 37500	85500 38750	85500 38750	88000 40000	91000 41250	93500 42500	96500 43750	99000 45000**	
BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775
27.00-49	LBS KG	71500 32500	74000 33500	76000 34500	78500 35500	80500(36) 36500(36)	82500 37500	85500 38750	88000 40000	88000(42) 40000(42)	91000 41250	93500 42500	93500 42500	96500(48) 43750(48)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700		
RADIAL														
24.00R49	LBS KG	34200 15500	36400* 16500*	37500 17000	38600 17500	40800 18500	41900 19000	43000 19500	44100 20000	45400 20600	46700 21200	48100** 21800**		
27.00R49	LBS KG	43000 19500	44100* 20000*	45400 20600	48100 21800	49400 22400	50700 23000	52000 23600	55100 25000	56800 25750	58400 26500	60000** 27250**		
BIAS	PSI KPA	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	
27.00-49	LBS KG	39700 18000	41900 19000	43000 19500	45400 20600	46700(36) 21200(36)	48100 21800	49400 22400	50700(42) 23000(42)	52000 23600	53600 24300	55100(48) 25000(48)	56800 25750	58400 26500
													60000(54) 27250(54)	

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



### DIMENSIONAL DATA

### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY			
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	
30.00-51	ELV-4B	IND-4	N L	22.00-4.5	33.1 841	113.3 2878	37.0 940	51.9 1318	180 112	867.0 5594	594.9 2248.7	98 78	109 87	255 375	265 390	245 360	
	HRL-4B	E-4		22.00-4.5	39.1 993	33.1 841	113.3 2878	37.0 940	51.9 1318	180 112	867.0 5594	594.9 2248.7	98 78	255 375	265 390	245 360	
	MRL-4B	E-4		22.00-4.5	39.1 993	33.0 838	114.3 2903	37.0 940	51.9 1318	180 112	867.0 5594	580.6 2197.7	109 87	255 375	265 390	245 360	
	MRL-4E #	E-4		22.00-4.5	39.1 993	33.0 838	114.7 2913	37.0 940	51.9 1318	180 112	865.0 5581	580.6 2197.7	109 87	255 375	265 390	245 360	
30.00R51	RL-4H	E-4	N A	22.00-4.5	39.1 993	33.7 856	115.6 2936	38.3 973	52.5 1334	182 113	856.0 5524	734.5 2776.4	88 70	450 655	340 495	205 295	
	RL-4JII	E-4		22.00-4.5	39.1 993	34.0 864	115.1 2924	38.3 973	52.5 1334	182 113	856.0 5524	734.8 2781.2	88 70	410 600	310 450	185 270	
33.00-51	HRL-4B	E-4	N L A	24.00-5.0	42.3 1074	35.6 904	120.2 3053	40.0 1016	54.7 1389	171 106	965.0 6226	650.0 2460.3	104 83	395 575	300 440		
33.00R51	GP-4B	E-4	A	24.00-5.0	42.3 1074	37.1 942	120.6 3063	41.9 1064	54.7 1389	173 107	1014.0 6542	881.1 3334.9	98 78	490 715	370 540	260 380	
	RC-1A #	E-4		24.00-5.0		37.0 940	119.0 3025	42.0 1067	53.0 1350	176 110	1046.0 6745	850.0 3218.0	101 80				
	RL-3J	E-3		24.00-5.0	42.3 1074	36.5 927	118.7 3015	41.6 1057	53.7 1364	177 110	970.0 6258	892.7 3378.8	63 50	620 900	480 700	290 430	
	RL-4C	E-4		24.00-5.0	42.3 1074	37.1 942	120.6 3063	41.9 1064	54.7 1389	173 107	1014.0 6542	881.1 3334.9	98 78	470 685	360 525	250 365	
	RL-4H	E-4		24.00-5.0	42.3 1074	36.7 932	120.6 3063	41.4 1052	54.4 1382	174 108	975.0 6290	897.4 3396.7	95 76	470 685	360 525	250 365	
	RL-4HII	E-4		24.00-5.0	42.3 1074	37.1 942	120.6 3063	41.9 1064	54.7 1389	173 107	1014.0 6542	897.4 3396.7	95 76	470 685	360 525	250 365	
	RL-4JII	E-4		24.00-5.0	42.3 1074	37.1 942	120.6 3063	41.9 1064	54.7 1389	173 107	1014.0 6542	881.1 3334.9	95 76	520 755	395 575	270 395	
	RL-4M+	E-4+		24.00-5.0	42.3 1074	36.4 925	120.6 3063	41.9 1064	54.9 1395	173 108	1197.0 7723	882.0 3339.0	112 89	540 785	410 595	290 420	
	RM-4A+ #	E-4+	N L E A	24.00-5.0	42.3 1074	37.1 942	120.6 3063	42.1 1070	53.7 1365	174 108	1046.0 6745	804.0 3043.0	110 88	540# 785#	410# 595#	285# 415#	

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750
30.00-51	LBS KG	88000 40000	91000 41250	93500 42500	96500 43750	99000 45000	102000 46250	104500 47500	107500(46) 48750(46)	110000 50000	113500 51500	113500 51500	117000(52) 53000(52)
33.00-51	LBS KG	104500 47500	107500 48750	110000 50000	113500 51500	117000 53000	120000 54500	120000 54500	123500(50) 56000(50)	128000 58000	128000 58000	132500 60000	135500(58) 61500(58)
RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800
30.00R51	LBS KG	88000 40000	91000* 41250*	93500 42500	99000 45000	100000 46250	104500 47500	107500 48750	110000 50000	113500 51500	117000 53000	120000 54500	120000 54500
33.00R51	LBS KG	102000 46250	107500* 48750*	110000 50000	113500 51500	117000 53000	120000 54500	123500 56000	128000 58000	132500 60000	132500 60000	139000 63000	139000 63000

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	
30.00-51	LBS KG	44100 20000	46700 21200	49400 22400	50700 23000	53600 24300	55100 25000	56800 25750	60000 27250	61500 28000	64000(46) 29000(46)	64000 29000	66000(52) 30000(52)	
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700		
30.00R51	LBS KG	52000 23600	55100* 25000*	56800 25750	58400 26500	61500 28000	64000 29000	66000 30000	68000 30750	69500 31500	71500 32500	74000** 33500**		
BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	
33.00-51	LBS KG	52000 23600	53600 24300	56800 25750	60000 27250	61500 28000	64000 29000	66000 30000	69500 31500	71500 32500	74000(50) 33500(50)	76000 34500	78500 35500	78500(58) 35500(58)
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	
33.00R51	LBS KG	60000 27250	64000* 29000*	66000 30000	68000 30750	71500 32500	74000 33500	76000 34500	78500 35500	80500 36500	82500 37500	85500** 38750**	88000 40000	

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



### DIMENSIONAL DATA

#### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
36.00-51	HRL-3B	E-3	N L	26.00-5.0	46.6 1184	40.0 1016	127.5 3246	44.1 1120	55.3 1405	169 105	1070.0 6903	948.0 3588.5	70 56	370 540		
	HRL-4B	E-4		26.00-5.0	46.6 1184	40.0 1016	127.8 3246	43.9 1115	58.8 1494	159 99	1128.0 7278		112 89	465 680	335 490	
	HRL-4D	E-4		26.00-5.0	46.6 1184	38.7 984	125.6 3190			154 96	1127.0 7271		127 103	450 660		
	MRL-4B	E-4		26.00-5.0	46.6 1184	40.0 1016	127.8 3246	43.9 1115	58.8 1494	159 99	1128.0 7278		118 93	325 470		
	SRB-7A	E-7		26.00-5.0	46.6 1184	39.9 1013	121.0 3073	44.6 1133	52.8 1341	177 110	1223.0 7890		37 29	430 630		
36.00R51	RL-3	E-3	N A	26.00-5.0	46.6 1184	39.7 1008	125.0 3175	45.1 1146	56.2 1427	163 104	1156.0 7459	1075.3 4070.1	73 58	685 1000	515 750	375 545
	RL-3+	E-3+		26.00-5.0	46.6 1184	39.7 1008	125.0 3175	45.1 1146	56.2 1427	163 104	1156.0 7459	1075.3 4070.1	86 68	525 770	450 660	270 390
	RL-4H	E-4		26.00-5.0	46.6 1184	40.6 1031	128.4 3261	45.7 1161	57.8 1468	164 102	1168.0 7535	1134.7 4294.8	108 85	565 825	490 715	300 435
	RL-4JII	E-4		26.00-5.0	46.6 1184	40.8 1036	128.4 3261	46.0 1168	57.8 1468	164 102	1168.0 7535	1134.7 4294.8	108 85	515 750	445 650	270 390
67-51	NRL D/L-5A	L-5		45.00-5.5		65.6 1666	137.7 3498	72.0 1829	60.2 1529	155 96	2450.0 15807	1538.0 5820.0	172 137			
39/90R53	RL-4H	E-4		26.00-4.0	46.6 1184	40.7 1034	128.3 3260	45.8 1163	57.8 1468	164 102	1170.0 7548	1115.2 4215.4	108 85	540 790	410 600	
37.00R57	GP-4C	E-4	A	27.00-6.0	48.5 1232	42.5 1080	135.8 3449	44.3 1125	61.5 1562	155 96	1350.0 8710	1275.0 4825.9	112 89	615 900	460 670	295 430
	RL-4C	E-4		27.00-6.0	48.5 1232	42.5 1080	135.8 3449	44.3 1125	61.5 1562	155 96	1350.0 8710	1275.0 4825.9	112 89	550 800	415 605	265 390
	RL-4H	E-4		27.00-6.0	48.5 1232	42.2 1072	135.5 3442	47.5 1207	60.9 1547	155 96	1285.0 8290	1298.8 4916.1	108 85	655 960	490 715	315 460
	RL-4HII	E-4		27.00-6.0	48.5 1232	42.1 1069	135.8 3449	47.1 1196	61.6 1565	155 96	1345.0 8678	1298.8 4916.1	108 85	550 800	410 600	245 360
	RL-4JII	E-4		27.00-6.0	48.5 1232	42.1 1069	135.8 3449	47.1 1196	61.6 1565	155 96	1345.0 8678	1298.8 4916.1	108 85	620 900	480 700	290 420
	RL-4M+	E-4+		27.00-6.0 29.00-6.0	48.5 1232	42.5 1080	135.8 3449	49.3 1252	61.5 1562	155 96	1500.0 9677	1450.0 5489.0	124 98	770 1125	590 860	350 515
	RM-4A+ #	E-4+		27.00-6.0 29.00-6.0	47.9 1216	42.2 1072	136.5 3467	48.0 1220	60.8 1545	154 96	1353.0 8729	1212.0 4588.0	124 98	770# 1125#	590# 860#	350# 515#

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

#### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	
36.00-51	LBS	128000(42)	128000	132500	139000	143500	143500(50)	147500	153000	156500(58)	
	KG	58000(42)	58000	60000	63000	65000	65000(50)	67000	69000	71000(58)	
RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750
									112 775	116 800	120 825
36.00R51	LBS	123500	128000*	132500	139000	143500	147500	152000	156500	161000	165500
	KG	56000	58000*	60000	63000	65000	67000	69000	71000	73000	75000
39/90R53	LBS	123500	128000*	132500	139000	143500	147500	152000	156500	161000	165500
	KG	56000	58000*	60000	63000	65000	67000	69000	71000	73000	75000
37.00R57	LBS	132500	135500*	139000	143500	147500	152000	156500	161000	165500	171000
	KG	60000	61500*	63000	65000	67000	69000	71000	73000	75000	77500
BIAS	PSI KPA	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550
									83 575	87 600	
67-51	LBS	156500	165500	171000	176500	187500	193000(54)	198500	204000	209500	215000
	KG	71000	75000	77500	80000	85000	87500(54)	90000	92500	95000	97500
										220500	227000
										100000	103000

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525
36.00-51	LBS	61500	66000	69500	71500	76000(42)	78500	80500	82500(50)	85500	88000	91000(58)
	KG	28000	30000	31500	32500	34500(42)	35500	36500	37500(50)	38750	40000	41250(58)
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700
36.00R51	LBS	74000	78500*	80500	82500	85500	88000	91000	93500	96500	99000	102000**
	KG	33500	35500*	36500	37500	38750	40000	41250	42500	43750	45000	46250**
39/90R53	LBS	74000	78500*	80500	82500	85500	88000	91000	93500	96500	99000	102000**
	KG	33500	35500*	36500	37500	38750	40000	41250	42500	43750	45000	46250**
37.00R57	LBS	82500	85500*	88000	91000	96500	99000	102000	104500	107500	110000	113500**
	KG	37500	38750*	40000	41250	43750	45000	46250	47500	48750	50000	51500**

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250	
36.00-51	LBS	24700	29100	33100	37500	40800	44100	46700	50700	
	KG	11200	13200	15000	17000	18500	20000	21200	23000	

Legend

▲ Permafoam inflation or special rim required

## CONVENTIONAL SIZE

### RADIAL



### BIAS



## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
40.00-57	HRL-4B	E-4		29.00-6.0	51.6 1311	43.2 1097	141.0 3581	49.5 1257	64.5 1638	145 90	1310.0 8452	1232.2 4664.2	115 91	550 800	415 610	
40.00R57	RH-4A+	E-4+	N L E A	29.0/6.0	53.1 1348	46.2 1173	140.8 3576	51.4 1306	63.0 1600	149.2 92.7		1450.0 5489.0	124 98			
	RL-3A	E-3		29.00-6.0	53.1 1349	44.2 1124	140.5 3569	51.4 1306	62.4 1585	150 93	1460.0 9419	1488.3 5633.0	80 63	785 1150	600 870	355 520
	RL-4B	E-4	N A	29.00-6.0, 32.00-6.0	53.1 1349	44.5 1130	140.5 3569	50.7 1287	62.4 1585	150 93	1611.010394	1488.3 5633.0	108 85	865 1260	660 965	390 570
	RM-4B+	E-4+	N L E A	29.00-6.0, 32.00-6.0	53.1 1348	44.5 1130	140.6 3571	50.6 1285	63.1 1603	149.4 92.8	1600.010323	1475.0 5583.0	124 98	890 1300	675 980	395 580
45R57	Two Piece Assembly	E-4		29.00-6.0	55.4 1406	46.2 1173	139.8 3551	51.6 1311	63.5 1613	150 93	1640.010581	1500.0 5678.0	110 87	785 1150	600 870	360 530
46/90R57	RH-4A+ #	E-4+	N L E A	29.0/6.0	57.0 1447	45.8 1164	140.6 3571		63.0 1600	149.4 92.9		1470.0 5565.0	124 98	935# 1360#	710# 1040#	
	RL-4B	E-4	N	29.00-6.0, 32.00-6.0	56.3 1429	47.2 1199	140.8 3576	54.3 1379	63.0 1600	150 93	1925.012419	1575.0 5962.0	108 85	910 1325	690 1010	410 595
	RM-4A+	E-4+	N L E A	29.00-6.0, 32.00-6.0	57.0 1448	46.2 1174	140.8 3576	52.6 1336	62.5 1588	149 93	1742.011237	1500.0 5678.0	124 98	980 1430	750 1090	440 645
	RM-4B+	E-4+	N L E A	29.00-6.0, 32.00-6.0	57.0 1447	46.2 1174	140.8 3576	52.7 1339	63.0 1600	149.3 92.8	1725.011129	1470.0 5565.0	124 98	935 1360	710 1040	415 600

See Wide Base Section for 80 aspect ratio tires (e.g. 59/80R63)

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725
40.00-57	LBS	161000	165500	171000	176500	182000	182000	187500	193000(60)	198500	204000	204000(68)
	KG	73000	75000	77500	80000	82500	82500	85000	87500(60)	90000	92500	92500(68)
RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775
											116 800	120 825
40.00R57	LBS	161000	165500*	171000	176500	182000	187500	193000	198500	204000	209400	215000
	KG	73000	75000*	77500	80000	82500	85000	87500	90000	92500	95000	97500
45R57	LBS	161000	165500*	171000	176500	182000	187500	193000	198500	204000	209400	215000
	KG	73000	75000*	77500	80000	82500	85000	87500	90000	92500	95000	97500
46/90R57	LBS	165500	171000*	176500	182000	187500	193000	198500	204000	209400	215000	220500
	KG	75000	77500*	80000	82500	85000	87500	90000	92500	95000	97500	100000

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550
40.00-57	LBS	80500	85500	88000	91000	96500	99000	102000	107500	110000(60)	113500	117000	120000(68)
	KG	36500	38750	40000	41250	43750	45000	46250	48750	50000(60)	51500	53000	54500(68)
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	
40.00R57	LBS	93500	99000*	102000	107500	110000	113500	117000	120000	123500	128000	132500**	
	KG	42500	45000*	46250	48750	50000	51500	53000	54500	56000	58000	60000**	
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725
													109 750
45R57	LBS	93500	99000*	102000	107500	110000	113500	117000	120000	123500	128000	132500	135500
	KG	42500	45000*	46250	48750	50000	51500	53000	54500	56000	58000	60000	61500
46/90R57	LBS	99000	104500*	107500	113500	117000	120000	123500	128000	132500	135500	139000**	
	KG	45000	47500*	48750	51500	53000	54500	56000	58000	60000	61500	63000**	

Legend

▲ Permafoam inflation or special rim required

## WIDE BASE SIZE

## DIMENSIONAL DATA

## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY			
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph	
10.5-20MPT	IND SG			9	10.9	276	37.6	955								
12.5-20MPT	IND SG			11	12.9	330	40.9	1040								
27.25-21	* SAW-7A	E-7		19.50-1.5	26.9	683	59.4	1509	28.0	711	25.7	653	371	231	378.0 2439	34 27
	* SRB-7A	E-7		19.50-1.5	26.9	683	59.4	1509	28.0	711	25.7	653	371	231	378.0 2439	19 15
15.5-25	HRL D/L-3A	G-3	E A	12.00-1.3	15.7	399	50.2	1275	17.7	441	22.7	577	415	258	150.0 968	51.0 191.0 33 26
	HRL D/L-3A	L-3	N E A	12.00-1.3	15.7	399	50.2	1275	17.7	450	22.4	569	425	264	214.0 1381	51.0 191.0 33 26
	SGL D/L-2A	G-2	N L E A	12.00-1.3	15.7	399	49.4	1255	17.3	439	22.4	569	421	262	170.0 1097	47.0 179.0 30 24
	SGL D/L-2A	L-2	N L E A	12.00-1.3	15.7	399	49.4	1255	17.6	447	21.5	546	442	275	206.0 1320	47.0 179.0 30 24

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

## Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
27.25-21	LBS KG	10200 4625	12020 5450	13890 6300	15210 6900	17090 7750	18190 8250	19290 8750	20940 9500

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	
15.5-25	LBS KG	8800 4000	9350(8) 4250(8)	9900 4500	10500 4750	10700(10) 4875(10)	11400 5150	11700 5300	12300(12) 5600(12)	

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	22 150	25 175	29 200	33 225	36 250	
15.5-25	LBS KG	4300(8) 1950(8)	4800(10) 2180(10)	5200 2360	5520 2580	5840(12) 2650(12)	

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD INDUSTRIAL TRACTOR SERVICE

BIAS	PSI KPA	26 180	29 200	32 220	36 250	41 280	44 300	48 330	51 350	54 375	
10.5-20MPT	LBS KG	2920 1325	3020 1370	3150 1430	3550(6) 1610(6)	3780 1715	3935(8) 1785(8)	3980 1800	4365 1980	4560(10) 2070(10)	
12.5-20MPT	LBS KG	3460 1570	3690 1675	3890 1765	4210 1910	4495 2040	4660(10) 2125(10)	4915 2230	5070(12) 2300(12)		

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250	
15.5-25	LBS KG	5680(8) 2575(8)	6150 2800	6600 3000	7150(12) 3250(12)	

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250	
27.25-21	LBS KG	6390 2900	7610 3450	8820 4000	9650 4375	10750 4875	11350 5150	12350 5600	13230 6000	

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

### RADIAL



### BIAS



## DIMENSIONAL DATA

GP-2B  
GP-2B  
RL-2F

GRL D/L-3A  
HRL D/L-3A  
SGL D/L-2A  
SHRL XT D/L  
SM-3A  
SMO D/L-4B  
SMO D/L-5A  
SMO D/L-5C  
SMO D/L-5B

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
					Overall Width in	Overall Diameter mm	Load Sect & Growth mm	Static Load Rad mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
15.5R25	GP-2B	E-3	N A	12.00-1.3	15.6	396	50.3	1278	419	260	198.0	1277	67.1	253.9	30 24
	GP-2B	G-3		12.00-1.3	15.6	396	50.3	1278	419	260	149.0	961	67.1	253.9	30 24
	GP-2B	L-3		12.00-1.3	15.6	396	50.3	1278	419	260	198.0	1277	67.1	253.9	30 24
	RL-2F	E-2		12.00-1.3	15.4	391	50.6	1285	415	257	200.0	1295	60.5	229.1	29 23
	RL-2F	G-2		12.00-1.3	15.4	391	50.6	1285	415	257	151.0	974	60.5	229.1	29 23
	RL-2F	L-2		12.00-1.3	15.4	391	50.6	1285	415	257	200.0	1295	60.5	229.1	29 23
17.5-25	GRL D/L-3A #	G-3	N L E A	14.00-1.5	17.7	450	52.6	1336	397	247	255.0	1645			32 25
	GRL D/L-3A #	L-3		14.00-1.5	17.7	450	52.6	1336	397	297	255.0	1645			32 25
	HRL D/L-3A	G-3		14.00-1.5	17.7	450	53.3	1354	404	251	266.0	2080	70.0	264.9	35 28
	HRL D/L-3A	L-3		14.00-1.5	17.7	450	53.3	1354	404	251	322.0	2080	70.0	264.9	35 28
	SGL D/L-2A	G-2		14.00-1.5	17.9	455	52.7	1339	396	246	195.0	1258	66.7	252.3	31 25
	SGL D/L-2A	L-2		14.00-1.5	18.0	457	53.3	1354	396	246	287.0	1855	66.7	252.3	31 25
	SHRL XT D/L	L-4		14.00-1.5	17.5	445	55.1	1400	395	245	250.0	1613			64 51
	SM-3A	L-3S		14.00-1.5	18.8	477	54.8	1393	383	238	188.0	1212	80.0	302.0	38 30
	SMO D/L-4B	L-4S		14.00-1.5	17.5	445	55.1	1400	395	245	250.0	1613			
	SMO D/L-5A	L-5S		14.00-1.5	17.5	445	55.1	1400	395	245	250.0	1613			82 65
	SMO D/L-5B	L-5S		14.00-1.5	17.5	445	55.1	1400	376	234	170.0	1097			104 59
	SMO D/L-5C	L-5S		14.00-1.5	17.5	445	55.1	1400	395	245	250.0	1613			87 69

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

	PSI	29	33	36	40	44	47	51	54	58	62	65	69	73	76	80	80	Continued
RADIAL	KPA	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550		
15.5R25	LBS	6600	7150	7600	8250	8800	9350	9900	10500	11000	11400	12000	12300	12800*	13600	13900		
	KG	3000	3250	3450	3750	4000	4250	4500	4750	5000	5150	5450	5600	5800*	6150	6300		
	PSI	83	87	91	94													
	KPA	575	600	625	650													
BIAS	LBS	14300	14800	15200	15700**													
	KG	6500	6700	6900	7100**													
	PSI	33	36	40	44	47	51	54	58	62	65	69	73	76	80	83		
	KPA	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575		
17.5-25	LBS	10500	11000	11700	12300	12800	13600(12)	13900	14800(14)	15200	15700	16100(16)	16500	17100	17600	18200(20)		
	KG	4750	5000	5300	5600	5800	6150(12)	6300	6700(14)	6900	7100	7300(16)	7500	7750	8000	8250(20)		

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

	PSI	25	29	33	36	40	44											
RADIAL	KPA	175	200	225	250	275	300											
15.5R25	LBS	4400	4800	5200	5680	6150	6600*											
	KG	2000	2180	2360	2575	2800	3000*											
BIAS	PSI	22	25	29	33	36	40	44	47									
	KPA	150	175	200	225	250	275	300	325									
17.5-25	LBS	5200	5680	6400(12)	6600(14)	6950	7400(16)	7850	8050(20)									
	KG	2360	2575	2900(12)	3000(14)	3150	3350(16)	3550	3650(20)									

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

	PSI	40	44	47	51	54	58	62	65	69	73	76					
RADIAL	KPA	275	300	325	350	375	400	425	450	475	500	525					
15.5R25	LBS	6150	6600	6950	7400	7850*	8050	8550	8800	9350	9650	9900**					
	KG	2800	3000	3150	3350	3550*	3650	3875	4000	4250	4375	4500**					
BIAS	PSI	25	29	33	36	40	44	47	51	54	58						
	KPA	175	200	225	250	275	300	325	350	375	400						
17.5-25	LBS	6800	7400	8050(12)	8550	8800	9350(16)	9900	10200	10700	11000(20)						
	KG	3075	3350	3650(12)	3875	4000	4250(16)	4500	4625	4875	5000(20)						

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

## RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY						
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph				
17.5R25	AS-3A	G-3	N	14.00-1.5	17.7	450	53.1	1348	20.1	510	23.8	604	396	246	185.0 1190	75.0 284.0	33 25	130 190	
	AT-2A	E-3		14.00-1.5	17.4	442	52.8	1341	19.1	485	24.1	612	398	247	190.0 1226	85.8 329.6	30 24		
	AT-2A	G-3		14.00-1.5	17.4	442	52.8	1341	19.1	485	24.1	612	398	247	245.0 1580	85.8 324.6	30 24		
	AT-2A	L-3		14.00-1.5	17.4	442	52.8	1341	20.0	508	23.2	589	398	247	245.0 1580	85.8 324.6	30 24		
	GP-2B	E-3		14.00-1.5	17.5	445	53.0	1346	19.4	493	24.2	615	396	246	205.0 1325	87.6 331.6	32 25	135 200	
	GP-2B	G-3		14.00-1.5	17.5	445	53.0	1346	19.4	493	24.2	615	396	246	205.0 1325	87.6 331.6	32 25	135 200	
	GP-2B	L-3	N	14.00-1.5	17.5	445	53.0	1346	20.0	508	23.6	599	396	246	230.0 1487	87.6 331.1	32 25	^90 ^130 ^80 ^120	
	RL-2+	E-3+T		14.00-1.5	17.6	446	54.3	1379	19.7	500	24.4	621	387	240	205.0 1325	79.2 299.9	45 36	100 150 75 110	
	RL-2+	G-3+T		14.00-1.5	17.6	446	54.3	1379	19.7	500	24.4	621	387	240	205.0 1325	79.2 299.9	45 36	100 150 75 110	
	RL-2+	L-3+T		14.00-1.5	17.6	446	54.3	1379	20.1	510	24.1	612	387	240	237.0 1532	79.2 295.9	45 36	55 80 50 70	
	RL-2F	E-2		14.00-1.5	17.7	449	53.1	1349	19.7	500	24.2	614	396	246	174.0 1125	81.9 310.1	30 24	125 180 95 140	
	RL-2F	G-2		14.00-1.5	17.7	450	53.1	1349	19.8	502	24.4	620	396	246	190.0 1225	81.9 310.1	30 24		
	RL-2F	L-2		14.00-1.5	17.7	449	53.3	1354	20.1	510	23.8	604	394	244	245.0 1586	81.9 310.1	30 24	^65 ^100 ^60 ^90	
	RL-3A+	L-3+T		14.00-1.5														75	
	RL-3J	E-3	A	14.00-1.5	18.2	462	53.1	1349	20.2	513	24.2	615	396	246	210.0 1355	83.2 315.0	32 25	85 120	
	RL-3J	G-3		14.00-1.5	18.2	462	53.1	1349	20.2	513	24.2	615	396	246	210.0 1355	83.2 315.0	32 25		
	RL-3J	L-3	N	A	14.00-1.5	18.2	462	53.1	1349	20.5	521	23.7	602	396	246	240.0 1548	83.2 315.0	32 25	
	RL-4K #	L-4		E	14.00-1.5	17.8	542	55.1	1400	19.6	499	24.6	624	381	237	215.0 1389	75.0 284.0	58 46	
	RL-4S Hi-Stability #	L-4S	L	14.00x1.5	18.1	460	55.2	1401	19.7	500	24.6	625	380.9	236.6	195.6 1262	87.0 329.0	59 46.4		
	RL-5K (08/08)	L-5		N	14.00-1.5	17.8	452	55.1	1400	20.2	513	24.6	624	381	237	215.0 1389	75.0 284.0	80 64	
	RL-5K (12/12)	L-5		N	14.00-1.5	17.8	452	55.1	1400	20.2	513	24.6	624	381	237	215.0 1389	75.0 284.0	80 64	
	RT-3B	G-3	E	14.00-1.5	18.1	460	53.2	1351			23.7	603	396	246	235.0 1514		36 29	^76 ^110	
	RT-3B	L-3		E	14.00-1.5	18.1	460	53.2	1351			23.7	603	396	246	235.0 1514		36 29	^76 ^110
	TL-3A+ #	E-3+T	E	14.00-1.5	18.2	462	53.2	1351			24.1	612	395	245		81.0 307.0	45 36	100# 150# 75# 110# 55# 80#	
	TL-3A+ #	L-3+T		E	14.00-1.5	18.2	462	53.2	1351	19.4	493	23.8	605	395	245	250.0 1613	81.0 307.0	45 36	^55# ^80# ^50# ^70#

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

## Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
17.5R25	LBS KG	8050 3650	8800 4000	9350 4250	10200 4625	10700 4850	11700 5300	12300 5600	12800 5800	13200 6000	13600 6150	14300 6500	14800 6700	15700* 7100*	16100 7300	16500 7500	
	PSI KPA	83 575	87 600	91 625	94 650	116 800											
	LBS KG	17100 7750	17600 8000	18200 8250	18700** 8500**	22000*** 10000***											

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

RADIAL	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450				
17.5R25	LBS KG	5200 2360	5680 2575	6400 2900	6800 3075	7400 3350	8050* 3650*	8250 3750	8800 4000	9100 4125	9650 4625	10200 4375	10500** 4750**				

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525				
17.5R25	LBS KG	7400 3350	7850 3550	8250 3750	8800 4000	9100* 4125*	9650 4375	10200 4625	10500 4750	11000 5000	11400 5150	12000** 5450**				

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD ARTICULATED DUMP SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450				
17.5R25	LBS KG	6800 3075	7400 3350	8050 3650	8550 3875	9100* 4125*	9650 4375	10200 4625	10700 4875	11400 5150	12000** 5450**	12300 5600				

Legend

▲ Permafoam inflation or special rim required

## WIDE BASE SIZE

## DIMENSIONAL DATA

### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY			
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	
20.5-25	GGL D/L-2A	E-2	L	17.00-2.0												
	GGL D/L-2A	G-2		17.00-2.0												
	GGL D/L-2A #	L-2		17.00-2.0	<b>20.5</b>	521	<b>58.6</b>	1488	<b>21.7</b>	551	<b>26.5</b>	673			36 28.6	
	GRL D/L-3A #	E-3		17.00-2.0	<b>20.6</b>	523	<b>58.5</b>	1486							36 29	
	GRL D/L-3A #	G-3		17.00-2.0	<b>20.6</b>	523	<b>58.5</b>	1486							36 29	
	GRL D/L-3A #	L-3		17.00-2.0	<b>20.3</b>	516	<b>59.2</b>	1504	<b>21.5</b>	546	<b>26.8</b>	681			36 29	
	HRL D/L-3A	G-3		17.00-2.0	<b>21.8</b>	554	<b>59.2</b>	1504	<b>24.0</b>	610	<b>26.4</b>	671	353	219	230.0 1485 116.8 442.1 38 30	
	HRL D/L-3A	L-3		17.00-2.0	<b>22.3</b>	565	<b>59.4</b>	1509	<b>24.4</b>	620	<b>26.0</b>	660	354	220	295.0 1903 116.8 442.1 38 30	
	HRL D/L-3C	L-3		17.00-2.0	<b>22.8</b>	579	<b>58.1</b>	1476	<b>23.2</b>	589	<b>26.3</b>	668	360	224		35 27
	HRL DL 5A/C	L-5		L E A	17.00-2.0	<b>21.8</b>	554	<b>61.3</b>	1557	<b>23.8</b>	605	<b>28.9</b>	734	329	204	276.0 1781 99.3 376.0 93 74
	HRL E/L-3A	E-3		N L E A	17.00-2.0	<b>21.8</b>	554	<b>58.9</b>	1496	<b>23.3</b>	592	<b>27.3</b>	693	348	216	240.0 1548 116.8 442.1 38 30
	HRL E/L-3A	G-3		N L A	17.00-2.0	<b>21.8</b>	554	<b>59.2</b>	1504	<b>24.0</b>	610	<b>26.4</b>	671	353	219	230.0 1485 116.8 442.1 38 30
	HRL E/L-3A	L-3		N L E A	17.00-2.0	<b>21.8</b>	554	<b>59.2</b>	1504	<b>23.9</b>	607	<b>26.8</b>	681	354	220	297.0 1916 116.8 442.1 38 30
	HRL-3A	E-3		L A	17.00-2.0	<b>22.0</b>	559	<b>59.2</b>	1504	<b>24.1</b>	612	<b>26.3</b>	668	353	219	240.0 1548 116.8 442.1 38 30
	SGL D/L-2A	G-2		N L	17.00-2.0	<b>21.8</b>	554	<b>58.7</b>	1491	<b>24.0</b>	610	<b>26.2</b>	665	356	221	235.0 1516 119.2 451.2 35 28
	SGL D/L-2A	L-2		L	17.00-2.0	<b>22.0</b>	559	<b>59.2</b>	1504	<b>23.1</b>	586	<b>25.1</b>	639	368	229	285.0 1839 119.2 451.2 35 28
	SGL E/L-2A	E-2		N E A	17.00-2.0	<b>21.8</b>	554	<b>59.1</b>	1501	<b>24.0</b>	610	<b>25.1</b>	639	355	221	277.0 1787 119.2 451.2 35 28
	SGL E/L-2A	G-2		N A	17.00-2.0	<b>21.8</b>	554	<b>58.7</b>	1491	<b>24.0</b>	610	<b>26.2</b>	665	356	221	235.0 1516 119.2 451.2 35 28
	SGL E/L-2A	L-2		N E A	17.00-2.0	<b>21.8</b>	554	<b>59.1</b>	1501	<b>24.0</b>	610	<b>25.1</b>	639	355	221	277.0 1787 119.2 451.2 35 28
	SGL-2A	E-2		L A	17.00-2.0	<b>21.4</b>	544	<b>59.1</b>	1501	<b>23.5</b>	597	<b>26.7</b>	678	355	221	245.0 1581 119.2 451.2 35 28
	SHRL	L-3			17.00-2.0	<b>21.8</b>	554	<b>59.2</b>	1504	<b>23.9</b>	607	<b>26.8</b>	681	354	220	297.0 1916 116.8 442.1 38 30
	SXT LDR	L-5		N L E A	17.00-2.0	<b>21.8</b>	554	<b>61.3</b>	1557	<b>23.8</b>	605	<b>28.9</b>	734	329	204	276.0 1781 99.3 376.0 93 74

77

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525
20.5-25	LBS KG	13900 6300	14800(12) 6700(12)	15700 7100	16500 7500	17100 7750	18200(16) 8250(16)	18700 8500	19300 8750	20400 9250	20900(20) 9500(20)	21500 9750	22000 10000	22700(24) 10300(24)

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	22 150	25 175	29 200	33 225	36 250	40 275
20.5-25	LBS KG	6950 3150	7850(12) 3550(12)	8250 3750	8800(16) 4000(16)	9350 4250	9900(20) 4500(20)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325
20.5-25	LBS KG	9100 4125	9900(12) 4500(12)	10700 4875	11400 5150	12000(16) 5450(16)	12800 5800	13200(20) 6000(20)

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

### RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY							
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph					
20.5R25	AS-3A	G-3	N L E A	17.00-2.0	20.3	516	57.9	1471	23.5	597	26.7	678	362.8	225.4	323.0	2084	128.0	485.0	40	31.8
	GP-2B	E-3		17.00-2.0	20.9	532	58.1	1476	23.4	594	26.4	671	362	225	277.0	1787	132.4	501.3	36	29
	GP-2B	G-3		17.00-2.0	20.9	532	58.1	1476	23.4	594	26.4	671	362	225	277.0	1787	132.4	501.3	36	29
	GP-4B AT	E-4		17.00-2.0	21.0	533	58.9	1496	23.3	592	26.0	660	357	222	296.0	1910			62	49
	GP-4D	E-4		17.00-2.0	21.1	536	58.9	1495	23.4	593	26.6	677	357	222	295.0	1904	125.0	473.0	66	52
	GP-4D	G-4		17.00-2.0	21.1	536	58.9	1495			27.0	687	357	222	274.0	1767	125.0	473.0	66	52
	RL-2+	E-3+T		17.00-2.0	21.0	533	58.4	1483	23.1	587	27.0	686	360	224	236.0	1520	124.4	470.9	50	40
	RL-2+	G-3+T		17.00-2.0	21.3	541	58.0	1473	23.5	597	26.8	681	362	225	218.0	1406	124.4	470.9	50	40
	RL-2F	E-2		17.00-2.0	21.2	537	58.5	1486	23.5	597	26.8	681	359	223	284.0	1832	124.4	470.9	34	27
	RL-2F	G-2		17.00-2.0	21.2	537	58.5	1486	23.4	594	27.0	686	359	223	250.0	1612	124.4	470.9	34	27
	RL-3J	G-3		17.00-2.0	21.3	541	58.6	1488	23.6	599	26.7	678	359	223	288.0	1858	129.8	491.4	36	29
	RT-3B	E-3		17.00-2.0	21.4	544	58.5	1486	23.7	602	26.6	676	360	224	280.0	1806	125.0	473.0	41	32
	RT-3B	G-3		17.00-2.0	21.4	544	58.5	1486	23.8	605	26.5	673	360	224	294.0	1897	125.0	473.0	41	32
	TL-3A+	E-3+T		17.00-2.0	21.5	545	58.1	1476	23.7	602	25.8	655	361	225	337.0	2172	133.0	503.0	50	40

Loader tires for this size are located on page 81

79

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

RADIAL	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450
20.5R25	LBS KG	6950 3150	7600 3450	8550 3825	9100 4125	9650 4375	10200* 4625*	10700 4875	11400 5150	12000 5450	12800 5800	13200 6000	13600** 6150**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525
20.5R25	LBS KG	9650 4375	10500 4750	11000 5000	11700 5300	12300* 5600*	12800 5800	13600 6150	14300 6500	14800 6700	15200 6900	16100** 7300**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD ARTICULATED DUMP SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450
20.5R25	LBS KG	8800 4000	9650 4375	10500 4750	11000 5000	12000 5450	12800* 5800*	13200 6000	13900 6300	14800 6700	15200 6900	16100** 7300**

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

### RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm									Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
20.5R25	GP-2B	L-3	N A E N E A L E A	17.00-2.0	<b>20.9</b>	532	<b>58.1</b>	1476	<b>24.0</b>	610	<b>25.7</b>	653	362	225	328.0 2116	132.4	501.3	36 29	^100 ^150 ^90 ^130
	GP-4B AT	L-4		17.00-2.0	<b>21.0</b>	533	<b>58.9</b>	1496	<b>23.7</b>	602	<b>26.2</b>	665	356	221	312.0 2012			62 49	
	GP-4D	L-4		17.00-2.0	<b>21.1</b>	536	<b>58.9</b>	1495	<b>26.2</b>	665	<b>25.6</b>	651	357	222	338.0 2184	<b>125.0</b>	473.0	66 52	
	RL-2+	L-3+T		17.00-2.0	<b>21.1</b>	536	<b>58.4</b>	1483	<b>23.7</b>	601	<b>25.9</b>	658	360	224	286.0 1847	<b>124.4</b>	470.9	50 40	
	RL-2F	L-2		17.00-2.0	<b>21.2</b>	537	<b>58.5</b>	1486	<b>23.9</b>	607	<b>26.1</b>	662	359	223	324.0 2090	<b>124.4</b>	470.9	34 27	
	RL-3J	L-3		17.00-2.0	<b>21.3</b>	541	<b>58.6</b>	1488	<b>24.0</b>	610	<b>26.1</b>	663	359	223	325.0 2097	<b>129.8</b>	491.4	36 29	
	RL-3S #	L-3S		17.00-2.0	<b>21.8</b>	554	<b>60.4</b>	1534	<b>24.3</b>	617	<b>26.7</b>	679	348	216	277.0 1786	<b>150.0</b>	568.0	43 34	
	RL-4K (24/24) #	L-4		17.00-2.0	<b>21.8</b>	554	<b>60.4</b>	1534	<b>24.3</b>	617	<b>26.7</b>	679	348	216	277.0 1786	<b>125.0</b>	473.0	64 51	
	RL-5K (24/24)	L-5		17.00-2.0	<b>21.8</b>	554	<b>60.4</b>	1534	<b>24.2</b>	615	<b>27.3</b>	693	348	216	285.0 1839	<b>129.5</b>	490.1	90 71	
	RL-5S	L-5S		17.00-2.0															^55 ^80
	RT-3B	L-3		17.00-2.0	<b>21.4</b>	544	<b>58.5</b>	1486	<b>24.5</b>	622	<b>26.0</b>	660	360	224	358.0 2310	<b>125.0</b>	473.0	41 32	
	RT-5C	L-5		17.00-2.0	<b>22.7</b>	577	<b>63.8</b>	1621	<b>25.2</b>	640	<b>27.6</b>	701	331	206					
	RT-5D Hi-Stability	L-5		17.00-2.0	<b>21.8</b>	554	<b>60.4</b>	1534	<b>24.3</b>	617	<b>26.7</b>	679	347.8	216.1	276.8 1786	<b>125.0</b>	473.0	95 74.9	
	SM-3A	L-3S		17.00-2.0	<b>21.4</b>	544	<b>58.9</b>	1495	<b>23.8</b>	605	<b>26.3</b>	668	357	222	330.0 2129	<b>129.5</b>	490.1	90 71	
	TL-3A+	L-3+T		17.00-2.0	<b>21.5</b>	545	<b>58.1</b>	1476	<b>23.7</b>	602	<b>25.8</b>	655	361	225	337.0 2172	<b>133.0</b>	503.0	50 40	

81

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
20.5R25	LBS KG	10500 4750	11400 5150	12300 5600	13200 6000	13900 6300	14800 6700	15700 7100	16500 7500	17600 8000	18200 8250	19300 8750	19800 9000	20900* 9500*	21500 9750	22000 10000	
	PSI KPA	83 575	87 600	91 625	94 650												
	LBS KG	22700 10300	24000 10900	24700 11200	25400** 11500**												

### 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
20.5R25	LBS KG	10500 4750	11400 5150	12300 5600	13200 6000	13900 6300	14800 6700	15700 7100	16500 7500	17600 8000	18200 8250	19300 8750	19800 9000	20900* 9500*	21500 9750	22000 10000	
	PSI KPA	83 575	87 600	91 625	94 650												
	LBS KG	22700 10300	24000 10900	24700 11200	25400** 11500**												

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revolution Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm									Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph
23.5-25	ELV-3A	IND-3	N L A	19.50-2.5	<b>24.9</b>	633	<b>64.6</b>	1640	<b>27.2</b>	690	<b>29.0</b>	737	300	186	422.0 2723	144.7	547.6	41	33
	GGL D/L-2A	E-2		19.50-2.5															
	GGL D/L-2A	G-2		19.50-2.5															
	GRL D/L-3A	E-3		19.50-2.5	<b>23.6</b>	599	<b>63.0</b>	1600	<b>25.0</b>	635	<b>28.3</b>	719						40	31.8
	GRL D/L-3A	G-3		19.50-2.5															
	HRL D/L-3A	G-3		19.50-2.5	<b>24.2</b>	615	<b>63.6</b>	1615	<b>26.7</b>	678	<b>28.3</b>	719	329	204	310.0 2000	144.7	547.2	41	33
	HRL E/L-3A	E-3		19.50-2.5	<b>24.5</b>	622	<b>63.8</b>	1620	<b>26.6</b>	676	<b>28.7</b>	729	328	204	352.0 2271	144.7	547.6	41	33
	HRL E/L-3A	G-3		19.50-2.5	<b>24.2</b>	615	<b>63.6</b>	1615	<b>26.7</b>	678	<b>28.3</b>	719	329	204	310.0 2000	144.7	547.6	41	33
	HRL E/L-3B	E-3		19.50-2.5	<b>24.6</b>	626	<b>63.4</b>	1610	<b>26.3</b>	668	<b>27.9</b>	710	336	209	431.0 2781	142.8	540.5	40	33
	HRL-3A	E-3		19.50-2.5	<b>24.5</b>	622	<b>63.8</b>	1620	<b>26.6</b>	676	<b>28.7</b>	729	328	204	352.0 2271	144.7	547.2	41	33
	SGL D/L-2A	G-2		19.50-2.5	<b>24.4</b>	620	<b>63.0</b>	1600	<b>26.8</b>	681	<b>28.0</b>	711	332	206	275.0 1774	145.3	550.1	39	31
	SGL E/L-2A	E-2		19.50-2.5	<b>24.4</b>	620	<b>64.1</b>	1628	<b>27.4</b>	696	<b>27.8</b>	706	335	208	375.0 2420	145.3	550.1	39	31
	SGL E/L-2A	G-2		19.50-2.5	<b>24.4</b>	620	<b>63.0</b>	1600	<b>26.8</b>	681	<b>28.0</b>	711	332	206	275.0 1774	145.3	550.1	39	31
	SGL-2A	E-2		19.50-2.5	<b>24.4</b>	620	<b>64.1</b>	1628	<b>27.4</b>	696	<b>27.1</b>	688	347	216	375.0 2420	145.3	550.1	39	31

Loader tires for this size are located on page 85

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	22 150	25 175	29 200	33 225	36 250
23.5-25	LBS KG	8800(12) 4000(12)	9650 4375	10500(16) 4750(16)	11400 5150	12000(20) 5450(20)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350
23.5-25	LBS KG	11700(12) 5300(12)	12800 5800	13600(16) 6150(16)	14300 6500	15200 6900	16100(20) 7300(20)	17100 7750	17600(24) 8000(24)

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY					
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph			
23.5-25	GGL D/L-2A #	L-2	A	19.50-2.5	<b>24.2</b>	615	<b>63.5</b>	1613	<b>25.6</b>	650	<b>28.5</b>	724	40	31.8				
	GRL D/L-3A	L-3		19.50-2.5	<b>23.6</b>	599	<b>63.0</b>	1600	<b>25.0</b>	635	<b>28.3</b>	719						
	HRL D/L-3A	L-3		19.50-2.5	<b>25.0</b>	635	<b>64.0</b>	1626	<b>26.8</b>	681	<b>28.2</b>	716	328	204	418.0 2696	144.7 547.2	41 33	
	HRL D/L-3B	L-3		19.50-2.5	<b>24.6</b>	626	<b>63.4</b>	1610	<b>26.3</b>	668	<b>27.9</b>	710	336	209	431.0 2781	142.8 540.5	40 33	
	HRL D/L-3C	L-3		19.50-2.5	<b>22.8</b>	579	<b>62.9</b>	1597	<b>25.6</b>	650	<b>27.7</b>	703	340	211	414.0 2671	34 28	50 70	
	HRL D/L-3C	L-3		19.50-2.5	<b>22.8</b>	579	<b>62.9</b>	1597	<b>25.6</b>	650	<b>27.7</b>	703	340	211	414.0 2671	34 28		
	HRL D/L-5A	L-5		19.50-2.5	<b>24.3</b>	617	<b>66.4</b>	1686	<b>26.4</b>	671	<b>31.0</b>	787	304	188.9	348.0 2245	100 79	100 79	
	HRL D/L-5C	L-5		19.50-2.5	<b>24.4</b>	619	<b>66.0</b>	1676	<b>26.4</b>	671	<b>29.2</b>	740	317	197	342.0 2207	100 79		
	HRL E/L-3A	L-3		N L A	19.50-2.5	<b>24.2</b>	615	<b>63.6</b>	1615	<b>27.2</b>	691	<b>28.0</b>	711	336	209	414.0 2671	41 33	65 100
	SGL D/L-2A	L-2		A	19.50-2.5	<b>24.7</b>	627	<b>62.9</b>	1598	<b>26.6</b>	676	<b>26.8</b>	681	337	210	496.0 3202	145.3 550.1	39 31
	SGL E/L-2A	L-2		N L E A	19.50-2.5	<b>24.4</b>	620	<b>64.1</b>	1628	<b>27.7</b>	704	<b>27.1</b>	688	336	209	470.0 3032	145.3 550.1	39 31
	SHRL XT D/L	L-4		N	19.50-2.5	<b>24.6</b>	625	<b>66.2</b>	1681	<b>27.1</b>	688	<b>30.5</b>	775	309	192	326.0 2103	146.7 555.1	70 56
	SXT DL	L-5		N L E A	19.50-2.5	<b>24.3</b>	617	<b>66.4</b>	1687	<b>26.4</b>	671	<b>31.0</b>	787	304	189	348.0 2245	136.8 517.0	100 79

85

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	Continued
23.5-25	LBS	17600(12)	18700	19800	20900(16)	22000	23400	24000(20)	24700	26000	26800	27600(24)	28300	29100	30000(28)	30900	
	KG	8000(12)	8500	9000	9500(16)	10000	10600	10900(20)	11200	11800	12150	12500(24)	12850	13200	13600(28)	14000	
	PSI	87	91	94	98	102	105	109	112								
	KPA	600	625	650	675	700	725	750	775								
	LBS	32000	32000(32)	33100	34200	34200(36)	35300	36400	36400(40)								
	KG	14500	14500(32)	15000	15500	15500(36)	16000	16500	16500(40)								

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

BIAS	PSI KPA	22 150	25 175	29 200	33 225	36 250
23.5-25	LBS	8800(12)	9650	10500(16)	11400	12000(20)
	KG	4000(12)	4375	4750(16)	5150	5450(20)

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

### RADIAL



## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY			
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph	Type 2 tmph tkph				Type 4 tmph tkph	Type 6 tmph tkph			
23.5R25	EV-5K	IND-5	N E	19.5-2.5	24.5	623	65.1	1654	27.3	694	29.4	747	333	207	379.0 2445	160.6	607.9	99	79	
	EV-5S	IND-5S		19.5-2.5	24.5	623	65.1	1654	27.3	694	29.4	747	333	207	379.0 2445	160.6	607.9	99	79	
	GP-2B	E-3		A	19.5-2.5	24.1	612	63.3	1608	27.1	688	28.9	735	335	208	316.0 2039	192.6	728.9	40	32
	GP-2B	G-3		A	19.5-2.5	24.1	612	63.3	1608	27.1	688	28.9	735	335	208	316.0 2039	192.6	728.9	40	32
	GP-3D	E-3T			19.5-2.5	24.1	612	63.3	1608	27.1	688	28.9	735	332	206	316.0 2039	192.6	728.9	47	37
	GP-4B	E-4			19.5-2.5	24.8	629	65.5	1665	27.9	708	29.3	745	321	199	335.0 2162	181.5	686.9	68	54
	GP-4B AT	E-4		A	19.5-2.5	24.6	626	63.8	1620	27.2	691	28.8	732	329	204	326.0 2103	177.8	673.0	68	54
	GP-4B AT	G-4		A	19.5-2.5	24.6	626	63.8	1620	27.2	691	28.8	732	329	204	326.0 2103	177.8	673.0	68	54
	GP-4C #	E-4		A	19.5-2.5	24.8	630	65.5	1664	27.8	706	28.8	733	321	199	338.3 2182	175.0	662.0	68	53
	GP-4C	G-4			19.5-2.5	24.8	629	65.3	1659	27.2	691	30.8	782	321	199	335.0 2162	181.5	686.9	68	54
	GP-4D	E-4			19.50-2.5	24.9	632	63.7	1618	27.6	702	28.9	735	328	204	324.0 2088	175.0	662.0	69	55
	GP-4D	G-4		N	19.50-2.5	24.9	632	63.7	1618			28.9	734	328	204	260.0 1680	175.0	662.0	69	55
	RL-2+	E-3+T		A	19.5-2.5	24.1	612	63.9	1623	26.8	681	28.9	734	326	203	312.0 2012	176.9	669.5	53	42
	RL-2+	G-3+T		N	19.5-2.5	24.1	612	63.9	1623	25.9	658	29.4	747	329	204	280.0 1806	176.9	669.5	53	42
	RL-2F	E-2			19.5-2.5	24.2	615	63.5	1613	26.7	679	28.7	728	331	206	316.0 2039	177.7	672.7	38	30
	RL-2F	G-2			19.5-2.5	24.1	612	63.5	1613	26.6	675	29.2	742	331	206	320.0 2065	177.7	672.7	38	30
	RL-3J	G-3		A	19.5-2.5	24.5	622	63.6	1615	27.1	688	28.8	732	330	205	370.0 2387	181.1	685.4	40	32
	RT-3B	E-3		N	19.5-2.5	25.2	640	63.2	1605	28.2	718	27.9	710	332	206	450.0 2903	175.0	662.0	44	35
	RT-3B	G-3		N	19.5-2.5	25.2	640	63.2	1605	28.2	718	27.9	710	332	206	450.0 2903	175.0	662.0	44	35
	TL-3A+	E-3+T		E	19.5-2.5	24.2	615	63.9	1623	27.2	691	28.6	726	329	204	353.0 2277	175.0	662.0	54	43

Loader tires for this size are located on page 89

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

RADIAL	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450
23.5R25	LBS KG	8800 4000	9900 4500	10700 4875	11700 5300	12300 5600	13200* 6000*	13900 6300	14300 6500	15200 6900	16100 7300	16500 7500	17100** 7750**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525
23.5R25	LBS KG	12300 5600	13200 6000	14300 6500	14800 6700	15700* 7100*	16500 7500	17100 7750	18200 8250	18700 8500	19800 9000	20400** 9250**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD ARTICULATED DUMP SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450
23.5R25	LBS KG	11000 5000	12000 5450	13200 6000	13900 6300	14800 6700	16100* 7300*	16500 7500	17600 8000	18700 8500	19300 8750	20400** 9250**

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

### RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY				
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad mm	1/32 in mm	Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph									
23.5R25	GP-2B	L-3	N A E L	19.5-2.5	24.1	612	63.3	1608	27.8	706	28.2	718	336	209	337.0 2174	192.6	728.9	40	32	^115 ^170	^95 ^140
	GP-3D	L-3T		19.5-2.5	24.1	612	63.3	1608	27.8	706	28.2	718	332	206	337.0 2174	192.6	728.9	47	37	115 170	95 140
	GP-4B AT	L-4		19.5-2.5	24.6	626	63.8	1620					329	204		177.8	673.0	68	54		
	GP-4C	L-4		19.5-2.5	24.8	629	65.5	1665	27.9	708	29.3	745	321	199	400.0 2582	181.5	686.9	68	54	70 100	65 100
	GP-4D	L-4		19.50-2.5	24.9	632	63.7	1618	28.5	723	28.0	710	328	204	397.0 2560	175.0	662.0	69	55		
	RL-2+	L-3+T		19.5-2.5	24.1	612	63.9	1623	27.5	699	28.2	716	329	204	394.0 2542	176.9	669.5	53	42	^70 ^100	^65 ^100
	RL-2F	L-2		19.5-2.5	24.1	613	63.5	1613	27.2	691	28.1	714	331	206	382.0 2465	177.7	672.7	38	30	85 120	80 120
	RL-3J	L-3		19.5-2.5	24.5	622	63.6	1615	27.8	706	27.7	704	330	205	410.0 2645	181.1	685.4	40	32		
	RL-3S Hi-Stability #	L-3S		19.5x2.5	24.5	622	65.1	1654	27.4	697	28.7	729	322.7 200.5	379.0 2445	189.0	715.0	50	39			
	RL-4K (24/24)	L-4		19.5-2.5	24.5	622	65.1	1653	27.4	697	28.7	729	232	201	379.0 2445	175.0	662.0	68	54		
	RL-4S Hi-Stability	L-4S		19.5x2.5																	
	RL-5K (24/24)	L-5		19.5-2.5	24.5	623	65.1	1654	27.3	694	29.4	747	333	207	379.0 2445	160.6	607.9	99	79	^55 ^80	^50 ^70
	RL-5S	L-5S		19.5-2.5	24.5	623	65.1	1654	27.3	694	29.4	747	333	207	379.0 2445	160.6	607.9	99	79		
	RT-3B #	L-3		19.5-2.5	25.2	640	63.2	1605	28.2	718	27.9	710	332	206	450.0 2903	175.0	662.0	44	35		
	RT-5C	L-5		19.5-2.5	24.0	610	65.7	1669	27.1	688	29.3	745	321	199	383.0 2473			98	78		
	RT-5D Hi-Stability	L-5	N L E A	19.50-2.5	24.5	622	65.1	1654	27.4	697	28.7	729	322.7 200.5	379.0 2445	175.0	662.0	101	80			
	SM-3A	L-3S	19.5-2.5	24.0	610	64.1	1628	27.2	691	28.4	722	328	204	360.0 2323	178.0	673.7					
	TL-3A+	L-3+T	19.5-2.5	24.2	615	63.9	1623	27.2	691	28.6	726	329	204	353.0 2277	175.0	662.0	54	43			

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
23.5R25	LBS KG	13200 6000	14300 6500	15700 7100	17100 7750	18200 8250	19300 8750	20400 9250	21500 9750	22700 10300	23400 10600	24700 11200	25400 11500	26800* 12150*	27600 12500	28300 12850	
	PSI KPA	83 575	87 600	91 625	94 650												
	LBS KG	29100 13200	30000 13600	30900 14000	32000** 14500**												

### 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
23.5R25	LBS KG	13200 6000	14300 6500	15700 7100	17100 7750	18200 8250	19300 8750	20400 9250	21500 9750	22700 10300	23400 10600	24700 11200	25400 11500	26800* 12150*	27600 12500	28300 12850	
	PSI KPA	83 575	87 600	91 625	94 650												
	LBS KG	29100 13200	30000 13600	30900 14000	32000** 14500**												

#### Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

### BIAS



GRL D/L-3A HRL D/L-5C HRL D/L-5A SGL D/L-2A SHRL DL SHRL SHRL XT D/L SMO D/L-5C SMO D/L-5D SXT DL

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revolution Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	Type 2 mph tkph				Type 4 mph tkph	Type 6 mph tkph		
26.5-25	GRL D/L-3A #	L-3	L N L A	22.00	28.2	716	68.4	1737	29.9	760	30.5	775	286 178	409.0 2639	185.3 701.5	44 35	75 110	105 150	90 130
	HRL D/L-5A	L-5		22.00-3.0	27.4	696	71.0	1803	29.9	760	33.0	838							
	HRL D/L-5C	L-5		22.00-3.0	27.4	696	71.4	1813	29.2	742	33.0	838							
	SGL D/L-2A	L-2		22.00-3.0	27.5	699	68.0	1727	29.7	754	28.5	724							
	SGL-2A	E-2		22.00-3.0	27.5	691	68.9	1750	30.1	765	29.9	759							
	SHRL	E-3		22.00-3.0	27.2	691	68.9	1750	30.1	765	29.9	759							
	SHRL DL	L-3		22.00-3.0	27.6	701	68.4	1737	29.3	744	29.9	759							
	SHRL XT D/L	L-4		22.00-3.0	27.7	704	70.6	1793	30.8	782	32.2	818							
	SMO D/L-5C	L-5S		22.00-3.0	27.4	696	71.0	1803	29.9	759	33.0	838							
	SMO D/L-5D	L-5S		22.00-3.0	27.4	696	71.0	1803	29.9	759	33.0	838							
	SMO D/L-5E	L-5S		22.00-3.0	25.2	640	70.4	1788	27.5	699	31.8	808							
	SXT DL	L-5		22.00-3.0	27.4	696	71.0	1803	29.9	760	33.0	838							

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550
26.5-25	LBS KG	22000(14) 10000(14)	24000 10900	25400 11500	26800 12150	27600 12500	29100(20) 13200(20)	30000 13600	30900(24) 14000(24)	32000 14500	33100(26) 15000(26)	34200(28) 15500(28)	35300 16000	36400 16500	37500(32) 17000(32)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	
26.5-25	LBS KG	14800 6700	16100 7300	17100 7750	18200(20) 8250(20)	19300 8750	20400(24) 9250(24)	20900(26) 9500(26)	22000(28) 10000(28)	

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

## RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY							
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 tmpk tkph	Type 4 tmpk tkph	Type 6 tmpk tkph					
26.5R25	EV-3B	IND-3	N A	22.0-3.0	26.8	681	68.4	1737	30.8	782	30.0	762	307	191	485.0	3128	239.0	904.5	45	36
	GP-2B	E-3		22.0-3.0	26.8	681	68.4	1737	30.0	762	30.9	785	307	191	400.0	2581	239.0	904.5	45	36
	GP-4B AT #	E-4		22.0-3.0	26.7	678	69.0	1753	30.0	762	31.2	792	303	188	400.0	2581	67	53	145#	210#
	GP-4D #	E-4		22.0-3.0	27.6	701	68.8	1748	29.9	759	31.2	792	303	188	429.0	2770	225.0	852.0	69	55
	RL-2+	E-3+T		22.0-3.0	27.3	693	68.8	1748	29.7	754	31.2	792	305	190	400.0	2581	237.6	899.4	56	44
	RL-2+	G-3+T		22.0-3.0	27.3	693	68.8	1748	29.7	754	31.2	792	305	190	400.0	2581	237.6	899.4	56	44
	RL-2F	E-2		22.0-3.0	27.5	699	68.8	1748	30.2	767	31.5	800	305	190	345.0	2226	240.4	909.9	43	34
	RT-3B	G-3		22.0-3.0	27.4	695	68.6	1741	30.4	773	30.1	765	306	190	462.0	2981	250.0	946.0	50	40
	TL-3A+	E-3+T		22.0-3.0	27.5	699	69.0	1753	30.2	767	30.3	770	305	189	484.0	3121	250.0	946.0	59	47

Loader tires for this size are located on page 95

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE

RADIAL	PSI KPA	18 125	22 150	25 175	29 200	33 225	36 250	40 275	44 300
26.5R25	LBS KG	8550 3875	9900 4500	11000 5000	12300 5600	13600 6150	14800 6700	15700 7100	16500* 7500*

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525
26.5R25	LBS KG	15700 7100	16500 7500	17600 8000	18700 8500	19800* 9000*	20900 9500	21500 9750	22700 10300	23400 10600	24700 11200	25400** 11500**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD ARTICULATED DUMP SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450
26.5R25	LBS KG	13900 6300	15200 6900	16500 7500	17600 8000	18700 8500	19800* 9000*	20900 9500	22000 10000	23400 10600	24000 10900	25400** 11500**

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

### RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY				
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph		
26.5R25	GP-2B	L-3	N A E A N E A N L E A	22.0-3.0	26.8	681	68.4	1737	30.8	782	30.0	762	307 191	485.0 3128	239.0 904.5	45 36	^130 ^190 ^110 ^160 75 110 70 100 100 150 95 140 80 120 75 110 95
	GP-4B AT	L-4		22.0-3.0	26.7	678	69.0	1753	30.8	782	30.2	766	303 188	400.0 2581	225.0 852.0	67 53	
	GP-4D	L-4		22.0-3.0	27.6	701	68.8	1748	30.8	782	30.5	775	306 190	456.0 2942	237.6 894.4	69 55	
	RL-2+	L-3+T		22.0-3.0	27.3	693	68.8	1748	30.3	770	30.5	775	305 190	416.0 2683	240.4 909.9	56 44	
	RL-2F	L-2		22.0-3.0	27.5	699	68.8	1748	30.9	785	30.7	780	305 190	410.0 2645	250.0 946.0	43 34	
	RL-3S	L-3S		22.0-3.0	27.8	707	68.9	1750	29.7	754	30.3	769	305 189	508.9 3283	250.0 946.0	56 44	
	RL-4K	L-4		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.3	795	299 186	459.0 2961	219.0 829.0	67 53	
	RL-4K (24/24)	L-4		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803	299 186	459.0 2961	219.0 829.0	67 53	
	RL-4S	L-4S		22.0-3.0													95
	RL-5K	L-5		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803	299 186	459.0 2961	219.0 829.0	110 87	
	RL-5K (03/03)	L-5		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803	299 186	459.0 2961	219.0 829.0	110 87	
	RL-5K (08/08)	L-5		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803	299 186	459.0 2961	219.0 829.0	110 87	
	RL-5K (12/12)	L-5		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803	299 186	459.0 2961	219.0 829.0	110 87	
	RL-5K (24/24)	L-5		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803	299 186	459.0 2961	219.0 829.0	110 87	
	RL-5K 00/23	L-5		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803	299 186	459.0 2961	219.0 829.0	110 87	
	RT-3B	L-3		22.0-3.0	27.4	695	68.6	1741	30.4	773	30.1	765	306 190	462.0 2981	250.0 946.0	50 40	
	RT-5C	L-5		22.0-3.0	26.7	678	70.7	1796	30.5	775	31.5	799	297 185	453.0 2920		105 83	
	RT-5D Hi-Stability	L-5		22.0-3.0	27.9	709	70.5	1791	31.3	795	31.6	803	299 185.8	508.9 3283	225.0 852.0	111 87.9	
	SM-5A	L-5S		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803	299 186	459.0 2961	219.0 829.0	110 87	
	TL-3A+	L-3+T		22.0-3.0	27.5	699	69.0	1753	30.2	767	30.3	770	305 189	484.0 3121	250.0 946.0	59 47	

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
<b>26.5R25</b>	<b>LBS</b>	<b>16500</b>	<b>18200</b>	<b>19800</b>	<b>20900</b>	<b>22700</b>	<b>24000</b>	<b>25400</b>	<b>26800</b>	<b>28300</b>	<b>29100</b>	<b>30900</b>	<b>32000</b>	<b>33100*</b>	<b>34200</b>	<b>35300</b>	
	KG	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000*	15500	16000	
	PSI KPA	83 575	87 600	91 625	94 650	116 800											
	<b>LBS</b>	<b>36400</b>	<b>37500</b>	<b>39700</b>	<b>40800**</b>	<b>46700***</b>											
	KG	16500	17000	18000	18500**	21800***											

### 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
<b>26.5R25</b>	<b>LBS</b>	<b>16500</b>	<b>18200</b>	<b>19800</b>	<b>20900</b>	<b>22700</b>	<b>24000</b>	<b>25400</b>	<b>26800</b>	<b>28300</b>	<b>29100</b>	<b>30900</b>	<b>32000</b>	<b>33100*</b>	<b>34200</b>	<b>35300</b>	
	KG	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000*	15500	16000	
	PSI KPA	83 575	87 600	91 625	94 650	116 800											
	<b>LBS</b>	<b>36400</b>	<b>37500</b>	<b>39700</b>	<b>40800**</b>	<b>46700***</b>											
	KG	16500	17000	18000	18500**	21800***											

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

### BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	Type 2 mph tkph				Type 4 mph tkph	Type 6 mph tkph		
29.5-25	GRL D/L-3A #	L-3	N L A	25.00	29.5	749	73.1	1857	31.3	795	32.3	820	290	180	561.0 3620	277.0 1048.5	48 38.1	^65 ^100	115 170
	HRL D/L-3A	L-3		25.00-3.5	30.7	780	73.1	1857	33.6	853	32.4	823	271	168	500.0 3226	277.0 1048.5	52 41		
	HRL D/L-5C	L-5		25.00-3.5	30.1	764	75.4	1915	32.1	815	34.2	868	294	183	516.0 3329	277.0 1048.5	117 93		
	HRL-3A	E-3		25.00-3.5	30.7	780	72.8	1849	33.0	838	32.0	813	304	189	615.0 3968	245.3 928.6	47 37		
	SGL D/L-2A	L-2		25.00-3.5	30.7	780	72.8	1849	33.6	853	31.0	787	294	183	516.0 3329	245.0 929.0	47 37		
	SGL-2A	E-2		25.00-3.5	30.7	780	72.8	1849	33.0	838	32.0	813	294	183	516.0 3329	277.0 1048.5	52 41		
	SHRL	E-3		25.00-3.5	30.7	780	72.8	1849	33.0	838	32.0	813	290	180	561.0 3620	277.0 1048.5	52 41		
	SHRL DL	L-3		25.00-3.5	30.7	780	73.1	1857	33.6	853	32.4	823	282	175	563.0 3632	277.0 1048.5	65 100		
	SHRL XT D/L	L-4		25.00-3.5	31.4	798	74.5	1892	34.8	884	33.5	851	275	171	468.0 3020	277.0 1048.5	77 61		
	SMO D/L-5A	L-5S		25.00-3.5	30.8	782	74.4	1890	34.2	869	34.2	869	290	180	557.0 3593	288.0 1090.7	123 98		
	SRB-7A	E-7		25.00-3.5	30.6	777	71.7	1821	32.0	813	32.5	825	279	173	492.0 3174	27 21	170 250		
	SXT DL	L-5		25.00-3.5	30.9	785	74.4	1890	34.1	866	34.2	869	279	173	492.0 3174	128 101	55 80		

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525
29.5-25	LBS KG	26800 12150	28300(16) 12850(16)	30000 13600	32000 14500	33100(22) 15000(22)	35300 16000	36400 16500	37500 17000	38600(28) 17500(28)	40800 18500	41900 19000	43000 19500	44100(34) 20000(34)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400
29.5-25	LBS KG	17600 8000	19300 8750	20400 9250	22000(22) 10000(22)	23400 10600	24000 10900	25400(28) 11500(28)	26800 12150	27600 12500	29100(34) 13200(34)

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
29.5-25	LBS KG	10470 4750	12350 5600	13890 6300	15650 7100	17090 7750	18190 8250	19840 9000	20940 9500

### 40 MPH (65 KM/H) MAXIMUM SPEED OFF-THE-ROAD SAND SERVICE

BIAS	PSI KPA	11 75	15 100	18 125	22 150	25 175	29 200	33 225	36 250
29.5-25	LBS KG	8540 3875	10200 4625	11680 5300	12790 5800	14330 6500	15210 6900	16530 7500	17640 8000

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

### RADIAL



## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS			Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY						
					Overall Width in	Overall Diameter mm	Load Sect & Growth mm	Static Load Rad mm	Type 2 tmph tkph					Type 4 tmph tkph	Type 6 tmph tkph					
29.5R25	EV-3B	IND-3	N A	25.00-3.5	30.5	775	73.1	1857	34.6	879	32.2	817	288	179	505.0	3258	307.7	1164.6	48	38
	GP-2B	E-3		25.00-3.5	30.5	775	73.1	1857	33.9	861	33.0	837	288	179	418.0	2697	307.7	1164.6	48	38
	GP-2B	L-3		25.00-3.5	30.1	765	73.1	1857	34.1	866	31.6	803	288	179	597.0	3852	307.7	1164.6	48	38
	GP-4B AT	E-4		25.00-3.5	29.2	742	73.5	1866	33.9	861	32.8	833	284	177	542.0	3497	300.0	1136.0	72	57
	GP-4B AT	L-4		25.00-3.5	29.3	744	73.4	1864	34.4	874	32.1	817	286	178	595.0	3839	300.0	1136.0	72	57
	GP-4D #	E-4		25.00-3.5	29.9	760	73.6	1870			32.6	829	285	177			300.0	1136.0	72	57
	GP-4D #	L-4		25.00-3.5	29.9	760	73.6	1870			32.2	819	285	177			300.0	1136.0	72	57
	GP-4D Hi-Stability	E-4		25.00-3.5	29.9	760	73.6	1870			32.6	829	285	177			300.0	1136.0	72	57
	GP-4D Hi-Stability #	L-4		25.00-3.5	29.9	760	73.6	1870			32.2	819	285	177			300.0	1136.0	72	57
	GT-4A #	E-4		25.00-3.5	30.4	772	74.5	1892	34.3	871	32.6	827	282	175	522.8	3373	297.0	1125.0	76	60
	GT-4A #	L-4		25.00-3.5	30.4	772	74.5	1892	34.3	871	32.6	827	282	175	522.8	3373	297.0	1125.0	76	60
	RL-2+	E-3+T		25.00-3.5	30.9	785	74.0	1880	33.4	848	33.9	861	284	176	447.0	2884	315.1	1192.7	60	48
	RL-2+	L-3+T		25.00-3.5	30.9	785	74.0	1880	34.2	869	32.9	834	284	176	514.0	3316	315.1	1192.7	60	48
	RL-2F	E-2		25.00-3.5	30.7	780	73.1	1857	33.9	861	33.9	861	288	179	410.0	2645	307.8	1165.1	44	35
	RL-2F	L-2		25.00-3.5	30.7	780	73.1	1857	34.6	879	32.2	817	288	179	498.0	3213	307.8	1165.1	44	35
	RL-4K (24/24)	L-4		25.00-3.5	30.4	771	75.7	1923	33.6	853	33.0	839	278	173	583.0	3758	325.0	1230.0	72	57
	RL-4K Hi-Stability	L-4		25.00-3.5	30.4	771	75.7	1923	33.6	853	33.0	839	278	173	583.0	3758	325.0	1230.0	72	57
	RL-4S Hi-Stability #	L-4S	L	25.0x25	30.4	771	75.7	1923	33.6	853	33.0	839	277.5	172.4	582.5	3758	325.0	1230.0	72	57.2
	RL-5K (24/24)	L-5		25.00-3.5	31.7	805	75.6	1920	34.9	887	33.9	861	278	173	468.0	3019	273.7	1036.1	120	95
	RL-5S	L-5S		25.00-3.5	31.7	805	75.6	1920	34.9	887	33.9	861	278	173	467.9	3019			122	97
	RT-3B	G-3																		
	RT-3B	L-3		25.00-3.5	29.9	760	73.1	1857			32.4	823	289	180	523.0	3373			55	44
	RT-5D Hi-Stability	L-5	N L E A	25.00-3.5	31.7	805	75.6	1920	34.9	887	33.9	861	277.9	172.7	468.0	3019	300.0	1136.0	120	95.3
	TL-3A+ #	E-3+T	N E	25.00-3.5	31.0	787	74.0	1880	34.1	866	33.7	856	284	176	496.0	3201	312.0	1180.0	60	48
	TL-3A+	L-3+T	N E	25.00-3.5	31.0	788	74.0	1880	35.2	894	32.7	831	284	176	592.0	3818	312.0	1180.0	60	48

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI	58	62	65	69	73	76	80	83	87	91	94	116
	KPA	400	425	450	475	500	525	550	575	600	625	650	800
29.5R25	LBS	34200	35300	37500	38600	39700*	41900	43000	44100	45400	46700	49400**	56800***
	KG	15500	16000	17000	17500	18000*	19000	19500	20000	20600	21200	22400**	25750***

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI	40	44	47	51	54	58	62	65	69	73	76	
	KPA	275	300	325	350	375	400	425	450	475	500	525	
29.5R25	LBS	18700	20400	21500	22700	24000*	25400	26000	27600	28300	30000	30900**	
	KG	8500	9250	9750	10300	10900*	11500	11800	12500	12850	13600	14000**	

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD ARTICULATED DUMP SERVICE

RADIAL	PSI	29	33	36	40	44	47	51	54	58	62	65	
	KPA	200	225	250	275	300	325	350	375	400	425	450	
29.5R25	LBS	16500	18200	19800	20900	22700	24000*	25400	26800	28300	29100	30900**	
	KG	7500	8250	9000	9500	10300	10900*	11500	12150	12850	13200	14000**	

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## DIMENSIONAL DATA

RADIAL



BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	Type 2 mph tkph				Type 4 mph tkph	Type 6 mph tkph		
26.5-29	SGL D/L-2A	L-2	L	22.0-3.0	27.2	691	72.8	1849	30.0	762	32.2	818	292	181	471.0	3039	45	36	^70 ^100
	SGL-2A	E-2		22.0-3.0	27.0	686	73.1	1857	29.1	739	32.9	836	286	178	438.0	2826	43	34	120 180
	SHRL	E-3		22.0-3.0	27.0	686	73.1	1857	29.1	739	32.9	836	286	178	438.0	2826	45	36	110 160
26.5R29	RL-2F	E-2	E	22.00-3.0	27.1	688	72.4	1839	29.9	759	33.0	838	290	180	380.0	2452	254.3	962.4	43 34
	RL-2F	L-2		22.00-3.0	27.1	688	72.4	1839	31.0	788	32.0	813	290	180	440.0	2838	254.3	962.4	43 34
	RL-3S	L-3S		22.00-3.0	29.0	737	73.4	1864	30.4	772	32.5	825	286	178	410.0	2645	305.0	1155.0	56 44
29.5-29	AMS D/L-5/8H	L-5	N L A	25.00-3.5	29.9	759	78.8	2002	32.5	826	36.8	935	256	159	486.0	3136	126	99	55 80 50 70
	DRL D/L-5A	L-5		25.00-3.5	30.0	762	78.9	2004	32.5	826	36.8	935	256	159	496.0	3200	128	102	70 100 65 100
	HRL D/L-3A	L-3		25.00-3.5	30.5	775	77.1	1958	33.7	856	34.6	879	272	169	587.0	3787	308.8	1168.9	52 41
	HRL D/L-5C	L-5		25.00-3.5	30.1	765	78.9	2004	33.0	838	36.3	922	259	161	560.0	3613	117	93	^80 ^120
	HRL-3A	E-3		25.00-3.5	30.3	770	77.1	1958	32.7	831	34.4	874	273	170	476.0	3071	308.8	1168.9	52 41
	SGL-2A	E-2		25.00-3.5	30.3	770	77.1	1958	32.7	831	34.4	874	273	170	476.0	3071	267.0	1012.0	47 37
	SHRL	E-3		25.00-3.5	30.3	770	77.1	1958	32.7	831	34.4	874	273	170	476.0	3071	308.8	1168.9	52 41
	SHRL	L-3		25.00-3.5	30.3	770	77.1	1958	33.3	846	33.6	853	280	174	625.0	4033	268.0	1014.4	47 37
	SHRL DL	L-3		25.00-3.5	30.5	775	77.1	1958	33.7	856	34.6	879	272	169	587.0	3787	308.8	1168.9	52 41
	SHRL XT D/L	L-4		25.00-3.5	30.8	782	78.7	1999	34.1	866	35.6	904	264	164	568.0	3665	273.3	1034.7	77 61
	SMO D/L-4A	L-4S		25.00-3.5	31.3	795	78.2	1986	34.9	886	35.7	907	259	161	512.0	3303	74	58	75 110 70 100
	SMO D/L-5A	L-5S		25.00-3.5	30.1	765	78.9	2004	33.0	838	36.3	922	259	161	566.0	3652	268.6	1016.7	137 108
	SMO D/L-5C	L-5S		25.00-3.5													55 80	50 70	
	SMO-5C	L-5S		25.00-3.5	30.1	765	78.9	2004	33.0	838	36.3	922	259	161	566.0	3652	268.6	1016.7	137 108
	SXT DL	L-5		25.00-3.5	30.1	765	78.9	2004	33.0	838	36.3	922	259	161	566.0	3652	261.0	988.0	128 102

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

## Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525		
26.5-29	LBS KG	24000 10900	25400 11500	26800 12150	28300 12850	30000 13600	30900 14000	32000(22) 14500(22)	33100 15000	34200 15500	35300(26) 16000(26)	37500 17000	38600 17500	39700(30) 18000(30)		
	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	76 550	80 575	83 600	87 625	91 650	94 650			
26.5R29	LBS KG	30000 13600	30900 14000	33100 15000	34200 15500	35300* 16000*	36400 16500	38600 17500	39700 18000	40800 18500	41900 19000	43000** 19500**				
	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525		
29.5-29	LBS KG	28300 12850	30900 14000	32000 14500	34200 15500	35300(22) 16000(22)	37500 17000	38600 17500	39700 18000	41900(28) 19000(28)	43000 19500	44100 20000	45400 20600	46700(34) 21200(34)	48100 21800	49400 22400
	PSI KPA	87 600	91 625												Continued	
	LBS KG	50700 23000	52000(40) 23600(40)													

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325						
26.5-29	LBS KG	15700 7100	17100 7750	18200 8250	19300 8750	20400(22) 9250(22)	21500 9750	22700(26) 10300(26)						
	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525		
26.5R29	LBS KG	16500 7500	17600 8000	18700 8500	19800 9000	20900* 9500*	22000 10000	23400 10600	24000 10900	25400 11500	26000 11800	27600** 12500**		
	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400			
29.5-29	LBS KG	18700 8500	20400 9250	22000 10000	23400(22) 10600(22)	24700 11200	26000 11800	26800(28) 12150(28)	28300 12850	29100 13200	30900(34) 14000(34)			

102

#### Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

## RADIAL



## DIMENSIONAL DATA

## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY					
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	Type 2 mph tkph				Type 4 mph tkph	Type 6 mph tkph					
29.5R29	RL-2+	E-3+T	N A	25.00-3.5	30.4	772	78.6	1996	34.0	864	36.0	914	267	166	525.0	3387	342.6	1296.8	60 48	210 310	160 230	
	RL-2+	G-3+T		25.00-3.5	30.4	772	78.6	1996	34.7	881	34.2	869	267	166	575.0	3710	342.6	1296.8	60 48	100 150	95 140	
	RL-2+	L-3+T		25.00-3.5	30.4	772	78.6	1996	34.7	881	34.2	869	273	170	480.0	3097	334.3	1265.4	44 35	260 380	195 280	
	RL-2F	E-2		25.00-3.5	30.3	770	77.0	1956	33.4	848	35.2	894	273	170	535.0	3452	334.3	1265.4	44 35	120 180	115 170	
	RL-2F	L-2		25.00-3.5	30.3	770	77.0	1956	34.0	864	34.6	879	273	170	492.0	3174	338.5	1281.0	47 37	185 270	100 150	95 140
	RL-3	E-3		25.00-3.5	30.5	775	77.0	1956	33.5	851	35.2	894	272	169	554.0	3571	350.0	1325.0	72 57	100 150	95 140	
	RL-4K (24/24)	L-4		25.00-3.5	30.7	779	79.7	2024	34.6	879	35.0	890	264	164	554.0	3571	325.0	1230.0	120 95	100 150	95 140	
	RL-5K (24/24)	L-5		25.00-3.5	30.1	764	79.7	2024	34.2	869	35.0	890	264	164	554.0	3571	325.0	1230.0	120 95	100 150	95 140	
	RL-5S #	L-5S		25.00-3.5	30.1	764	79.7	2024	34.2	869	35.0	890	264	164	554.0	3571	325.0	1230.0	120 95	100 150	95 140	
33.25-29	SHRL8	E-3		27.00-3.5	33.6	853	81.9	2080	37.2	945	36.4	925	256	159	652.0	4207	288.0	1090.7	54 43	140 200		
33.25R29	RL-2F	E-2		27.00-3.5	34.2	869	82.2	2089	35.5	902	37.0	940	256	159	570.0	3677	437.2	1654.8	53 42	275 400	210 310	
	RL-2F	L-2		27.00-3.5	34.2	869	82.2	2089	37.0	940	36.0	914	256	159	690.0	4452	437.2	1654.8	53 42	285 420	220 320	
	RT-3A	E-3	N	27.00-3.5	34.2	869	82.2	2089	35.5	902	37.0	940	248	154	600.0	3871	437.2	1654.8	53 42	255# 370#	205# 300#	170# 250#
	TL-3A #	E-3	N	27.00 x 3.5	34.0	864	82.2	2088	38.5	978	36.0	915	255.6	158.8	645.8	4166	425.0	1609.0	57 45	255# 370#	205# 300#	170# 250#
	TL-4A #	E-4	N	27.00 x 3.5	34.0	864	82.2	2088	38.5	978	36.0	915	255.6	158.8	645.8	4166	425.0	1609.0	81 64	185# 270#	150# 215#	125# 185#
33.5-33	HRL-3F	E-3	N A	28.00-4.0	34.2	869	87.7	2228	36.8	935	40.0	1016	235	146	609.0	3929	443.8	1679.9	63 50	160 230		
	SHRL	E-3		28.00-4.0	34.3	871	87.1	2212	36.6	930	39.0	991	239	149	590.0	3807			53 42	90 130		
	SHRL XT D/L	L-4		28.00-4.0	34.2	869	90.6	2301	39.6	1006	40.5	1029	231	144	887.0	5723	416.0	1574.0	87 69	170 250		
	SHRL8	E-3	N L	28.00-4.0	34.2	869	88.3	2243	36.8	935	39.7	1008	235	146	609.0	3929			59 47	105 150		
	SHRL8 DL	L-3		28.00-4.0	34.2	869	87.7	2228	37.3	947	38.8	986	241	150	788.0	5084	374.0	1415.6	59 47	105 150		

103

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI	58	62	65	69	73	76	80	83	87	91	94	116
	KPA	400	425	450	475	500	525	550	575	600	625	650	800
29.5R29	LBS	36400	37500	39700	40800	43000*	44100	45400	46700	49400	50700	52000**	60000***
	KG	16500	17000	18000	18500	19500*	20000	20600	21200	22400	23000	23600**	27250***
BIAS	PSI	33	36	40	44	47	51	54	58	62	65		
	KPA	225	250	275	300	325	350	375	400	425	450		
33.25-29	LBS	35300	37500	38600(20)	40800	43000	45400(26)	46700	48100	50700	52000(32)		
	KG	16000	17000	17500(20)	18500	19500	20600(26)	21200	21800	23000	23600(32)		
RADIAL	PSI	58	62	65	69	73	76	80	83	87	91	94	
	KPA	400	425	450	475	500	525	550	575	600	625	650	
33.25R29	LBS	44100	46700	48100	50700	52000*	53600	56800	58400	60000	61500	64000**	
	KG	20000	21200	21800	23000	23600*	24300	25750	26500	27250	28000	29000**	
BIAS	PSI	44	47	51	54	58	62	65	69	73	76	80	83
	KPA	300	325	350	375	400	425	450	475	500	525	550	575
33.5-33	LBS	45400	48100	49400	52000	53600	56800(32)	58400	60000	61500	64000(38)	66000	66000
	KG	20600	21800	22400	23600	24300	25750(32)	26500	27250	28000	29000(38)	30000	30000
<b>25 MPH (40 KM/H) MAXIMUM SPEED OFF-THE-ROAD TRACTOR AND GRADER SERVICE</b>													
RADIAL	PSI	25	29	33	36	40	44	47	51	54	58	62	65
	KPA	175	200	225	250	275	300	325	350	375	400	425	450
29.5R29	LBS	14300	15700	17100	18700	20400	21500*	22700	24000	25400	26800	27600	29100**
	KG	6500	7100	7750	8500	9250	9750*	10300	10900	11500	12150	12500	13200**
<b>30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE</b>													
RADIAL	PSI	40	44	47	51	54	58	62	65	69	73	76	
	KPA	275	300	325	350	375	400	425	450	475	500	525	
29.5R29	LBS	20400	21500	22700	24000	25400*	26800	27600	29100	30000	32000	33100**	
	KG	9250	9750	10300	10900	11500*	12150	12500	13200	13600	14500	15000**	
33.25R29	LBS	24700	26800	28300	30000	30900*	33100	34200	36480	37500	38600	40800**	
	KG	11200	12150	12850	13600	14000*	15000	15500	16500	17000	17500	18500**	
BIAS	PSI	25	29	33	36	40	44	47					
	KPA	175	200	225	250	275	300	325					
33.25-29	LBS	22700	24700	26800	28300	30000(26)	30900	33100(32)					
	KG	10300	11200	12150	12850	13600(26)	14000	15000(32)					
BIAS	PSI	25	29	33	36	40	44	47	51	54	58		
	KPA	175	200	225	250	275	300	325	350	375	400		
33.5-33	LBS	25400	27600	29100	30900	33100	35300	36400(32)	38600	39700	40800(38)		
	KG	11500	12500	13200	14000	15000	16000	16500(32)	17500	18000	18500(38)		

104

**Legend**

▲ Permafoam inflation or special rim required

**WIDE BASE SIZE**

## WIDE BASE SIZE

## DIMENSIONAL DATA

RADIAL



BIAS

RL-2F  
RL-3F

RL-3J

RL-3

SHRL

SHRL XT D/L SMO

D/L-5A

SHRL8 DL  
SHRL8

SXT DL

HRL D/L-3F  
HRL-3F

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revolution Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 tmph tkph	Type 4 tmph tkph	Type 6 tmph tkph	Type 2 tmph tkph				Type 4 tmph tkph	Type 6 tmph tkph		
37.5-33	HRL-3F	E-3	N A	32.00-4.5	40.3	1024	93.3	2370	43.1	1095	41.8	1062	223	139	814.0 5252	67 53	210 310	220 320	
	SGL-2A	E-2		32.00-4.5	38.9	988	93.7	2380	41.8	1062	41.6	1057	225	140	737.0 4755				
	SHRL8	E-3		32.00-4.5	38.9	988	93.2	2367	42.3	1074	41.8	1062	223	139	814.0 5252				
	SHRL8 DL	L-3		32.00-4.5	39.5	1003	93.3	2370	42.3	1074	41.8	1062	223	139	814.0 5252				
29.5-35	SGL-2A	E-2	N L	25.00-3.5	29.6	752	83.4	2118	32.3	820	37.7	958	250	155	537.0 3465	281.3 1064.7	47 37	170 250	
	SHRL	E-3		25.00-3.5	29.6	752	83.4	2118	32.3	820	37.7	958	250	155	537.0 3465	278.0 1052.3	49 39	145 210	
	SHRL8	E-3		25.00-3.5	29.7	754	83.3	2116	32.0	813	37.5	953	251	156	522.0 3368	51 40	160 230	160 230	
33.25-35	HRL D/L-3F	L-3	N A	27.00-3.5	34.1	865	88.7	2252	37.6	955	39.4	1000	236	147	760.0 4904	63 50	160 230	160 230	
	HRL-3F	E-3		27.00-3.5	33.7	856	87.5	2223	36.8	935	39.8	1011	237	147	627.0 4045				
	SHRL XT D/L	L-4		27.00-3.5	33.1	841	91.1	2314	37.1	942	41.6	1057	225	140	730.0 4710				
	SHRL8	E-3		27.00-3.5	33.7	856	88.4	2245	36.8	935	39.4	1001	237	147	627.0 4045				
	SHRL8	E-3		27.00-3.5	33.7	856	88.2	2240	36.4	925	39.3	998	238	148	616.0 3974				
	SHRL8 DL	L-3		27.00-3.5	33.7	856	87.5	2223	37.4	950	38.5	978	243	151	782.0 5045	54 43	110 160	170 250	
	SMO D/L-5A	L-5S		27.00-3.5	32.9	836	91.1	2314	36.2	920	42.1	1069	222	138	767.0 4949				
	SXT DL	L-5		27.00-3.5	32.9	836	91.1	2314	36.2	920	42.1	1069	222	138	767.0 4949				
	33.25R35	RL-2F		27.00-3.5	33.4	848	87.7	2228	37.4	950	39.0	990	240	149	664.0 4284	454.9 1721.6	53 42	325 470	245 360
		RL-2F	L-2	27.00-3.5	33.4	848	87.7	2228	38.4	975	37.8	960	240	149	776.0 5006	454.9 1721.6	53 42	150 220	145 210
		RL-3	E-3	27.00-3.5	34.0	864	88.1	2238	37.7	958	40.0	1016	238	148	660.0 4258	486.2 1840.3	53 42	210 310	
		RL-3F	E-3	27.00-3.5	34.5	876	88.2	2240	38.4	976	40.1	1020	238	148	644.0 4154	486.2 1840.3	53 42	210 310	
		RL-3F	L-3	27.00-3.5	34.5	876	88.2	2240	39.0	991	39.0	991	238	148	785.0 5064	486.2 1840.3	53 42	230 340	
		RL-3J	E-3	27.00-3.5	34.9	886	88.3	2243	38.6	980	39.5	1003	238	148	670.0 4323	486.2 1840.3	53 42	230 340	

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

LegendN = North America  
L = Latin AmericaE = Europe / Africa / Mid East  
A = Asia / Australia# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	
37.5-33	LBS KG	46700 21200	49400 22400	52000 23600	55100 25000	56800 25750	60000 27250	61500(30) 28000(30)	64000 29000	68000 30750	69500(36) 31500(36)	71500 32500	74000 33500	76000(42) 34500(42)	
29.5-35	LBS KG	30900 14000	33100 15000	35300 16000	37500 17000	38600 17500	40800 18500	41900 19000	44100 20000	45400(28) 20600(28)	46700 21200	48100 21800	49400 22400	50700(34) 23000(34)	
BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	
33.25-35	LBS KG	37500 17000	39700 18000	41900(20) 19000(20)	44100 20000	46700 21200	49400(26) 22400(26)	50700 23000	53600 24300	55100 25000	56800(32) 25750(32)	58400 26500	60000 27250	61500(38) 28000(38)	74000(50) 33500(50)
RADIAL	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650			
33.25R35	LBS KG	48100 21800	50700 23000	53600 24300	55100 25000	56800* 25750*	58400 26500	61500 28000	64000 29000	66000 30000	68000 30750	69500** 31500**			

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400					
37.5-33	LBS KG	30900 14000	33100 15000	35300 16000	37500 17000	39700(30) 18000(30)	41900 19000	44100(36) 20000(36)	45500 20600	48100 21800	49400(42) 22400(42)					
29.5-35	LBS KG	20400 9250	22000 10000	24000 10900	25400 11500	26800 12150	28300 12850	30000(28) 13600(28)	30900 14000	32000 14500	33100(34) 15000(34)					
BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525
33.25-35	LBS KG	24700 11200	26800 12150	28300 12850	30900 14000	32000 14500	34200 15500	35300(32) 16000(32)	37500 17000	38600 17500	39700(38) 18000(38)	41900 19000	43000 19500	44100 20000	45400 20600	46700(50) 21200(50)
RADIAL	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525				
33.25R35	LBS KG	26800 12150	28300 12850	30900 14000	32000 14500	34200* 15500*	35300 16000	37500 17000	38600 17500	40800 18500	41900 19000	44100** 20000**				

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## WIDE BASE SIZE

### RADIAL



### DIMENSIONAL DATA

#### BIAS

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS			LOADED DIMENSIONS			Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY						
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 mph tkph	Type 4 mph tkph					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph				
37.25-35	HRL-3F	E-3	N A	31.00-4.0	39.3	998	94.1	2390	42.7	1085	41.8	1062	223	139	804.0	5187	603.5	2284.4	67	53	210 310
	HRL-3T #	E-3		31.00-4.0	37.6	955	93.0	2362	38.6	980	41.3	1049	224	139	804.0	5187	603.5	2284.4	68	53	215# 315#
	SHRL8	E-3		31.00-4.0	38.6	980	94.1	2390	41.9	1064	41.8	1062	223	139	804.0	5187	603.5	2284.4	60	48	220 320
	SHRL8 DL	L-3		31.00-4.0	38.6	980	94.1	2390	40.6	1031	42.9	1090	218	135	986.0	6362	424.7	1607.4	156	124	^130 ^190
	SXT DL	L-5		31.00-4.0	37.4	950	95.0	2413	40.0	1016	43.8	1113	213	132	950.0	6129	60	48	110 160		
37.25R35	RL-2F	E-2	N L	31.00-4.0	37.0	939	93.0	2361	42.4	1076	41.2	1047	226	140	764.0	4929	604.5	2288.0	58	46	375 550
	RL-2F	L-2		31.00-4.0	37.0	939	93.0	2361	43.2	1097	40.2	1020	226	140	956.0	6168	604.5	2288.0	58	46	^160 ^230
	RL-3J	E-3		31.00-4.0	40.0	1016	94.1	2390	44.2	1123	41.8	1062	223	139	750.0	4839	668.8	2531.4	60	48	260 380
	RT-3A+	E-3+		31.00-4.0																	
37.5-39	HRL D/L-5A	L-5	N A	32.00-4.5	38.4	975	100.8	2560	41.9	1064	46.5	1181	201	125	975.0	6290	489.3	1852.1	168	133	115 170
	HRL-3F	E-3		32.00-4.5	40.2	1021	99.3	2522	43.1	1095	44.6	1133	209	130	829.0	5349	631.8	2388.0	67	53	225 330
	SHRL8	E-3		32.00-4.5	39.5	1003	99.3	2522	42.3	1074	44.6	1133	209	130	829.0	5349	61	48	240 350		
	SHRL8 DL	L-3		32.00-4.5	39.5	1003	99.3	2522	41.0	1041	45.8	1163	204	127	1016.0	6555	61	48			
37.5R39	RL-2F	E-2	N L	32.00-4.5	37.5	953	99.6	2530	42.3	1074	44.7	1135	211	131	785.0	5064	680.7	2576.4	57	45	385 560
	RL-2F	L-2		32.00-4.5	37.5	953	99.6	2530	43.6	1107	43.4	1102	211	131	937.0	6045	680.7	2576.4	57	45	^185 ^270
	RL-3	E-3		32.00-4.5	38.5	978	100.0	2540	43.1	1095	45.3	1151	210	130	830.0	5355	680.7	2576.4	58	46	295 430
	RL-3J	E-3		32.00-4.5	38.8	986	100.0	2540	43.7	1110	45.3	1150	210	130	815.0	5258	680.7	2576.4	58	46	1170 ^250
40.5/75R39	GP-2B	E-3	N A	32.00-4.5	40.4	1026	101.4	2576	45.9	1166	44.9	1140	207	129	983.0	6342	798.8	3023.5	58	46	400 580
	RL-4K	L-4		32.00-4.5	40.4	1026	101.4	2576	44.0	1119	44.8	1138	207	129	1093.0	7050	725.0	2744.0	87	70	140 200
	RT-3A+	E-3+		32.00-4.5	40.8	1036	101.6	2581	46.4	1179	44.9	1140	207	129	984.0	6348	775.0	2934.0	62	49	375 550

107

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

#### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

# LOAD LIMITS AT COLD INFLATION PRESSURES

## 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525
37.25-35	LBS	45400	48100	50700	53600	56800	58400	61500(30)	64000	66000	68000(36)	69500	71500	74000(42)
	KG	20600	21800	23000	24300	25750	26500	28000(30)	29000	30000	30750(36)	31500	32500	33500(42)
RADIAL	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650		
	LBS	58400	60000	64000	66000	68000*	71500	74000	76000	78500	80500	82500**		
37.25R35	KG	26500	27250	29000	30000	30750*	32500	33500	34500	35500	36500	37500**		
	LBS	61500	66000	68000	71500	74000*	76000	78500	82500	85500	88000	91000**		
37.5R39	KG	28000	30000	30750	32500	33500*	34500	35500	37500	38750	40000	41250**		
	LBS	71500	74000	78500	80500	82500*	88000	91000	93500	96500	99000	102000**		
40.5/75R39	KG	32500	33500	35500	36500	37500*	40000	41250	42500	43750	45000	46250**		
	PSI KPA	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600
BIAS	LBS	58400	61500	64000	68000	69500	71500	74000(36)	76000	78500	82500	82500(44)	85500	88000
	KG	26500	28000	29000	30750	31500	32500	33500(36)	34500	35500	37500	37500(44)	38750	40000
37.5-39	LBS	58400	61500	64000	68000	69500	71500	74000(36)	76000	78500	82500	82500(44)	85500	88000
	KG	26500	28000	29000	30750	31500	32500	33500(36)	34500	35500	37500	37500(44)	38750	41250
<b>30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE</b>														
BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400			
37.25-35	LBS	30000	32000	34200	36400	38600(30)	40800	43000(36)	44100	46800	48100(42)			
	KG	13600	14500	15500	16500	17500(30)	18500	19500(36)	20000	21200	21800(42)			
RADIAL	PSI KPA	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525		
	LBS	32000	34200	36400	38600	40800*	43000	45400	46700	49400	50700	52000**		
37.25R35	KG	14500	15500	16500	17500	18500*	19500	20600	21200	22400	23000	23600**		
	LBS	35300	37500	39700	41900	44100*	46700	48100	50700	52000	55100	56800**		
37.5R39	KG	16000	17000	18000	19000	20000*	21200	21800	23000	23600	25000	25750**		
	LBS	39700	41900	45400	48100	49400*	52000	55100	56800	60000	61500	64000**		
40.5/75R39	KG	18000	19000	20600	21800	22400*	23600	25000	25750	27250	28000	29000**		
	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475
BIAS	LBS	33100	35300	37500	40800	43000	45400	47000(36)	49400	50700	53600(44)	55100	56800	58400(52)
	KG	15000	16000	17000	18500	19500	20600	21200(36)	22400	23000	24300(44)	25000	25750	26500(52)

### Legend

▲ Permafoam inflation or special rim required

**WIDE BASE SIZE**

## WIDE BASE SIZE

## DIMENSIONAL DATA

## RADIAL



## BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revolution Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY				
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	Type 2 mph tkph				Type 4 mph tkph	Type 6 mph tkph				
41.25/70-39	NRL D/L-5A	L-5	N A	32.00-4.5	<b>42.1</b>	1069	<b>98.4</b>	2499	<b>43.8</b>	1113	<b>44.6</b>	1133	209	130	955.0 6162	549.3	2079.2	145	115	95 140	85 120
37.5-51	HRL D/L-5A	L-5		32.00-4.5	<b>37.8</b>	960	<b>113.8</b>	2891	<b>41.5</b>	1054	<b>53.2</b>	1351	176	109	1063.0 6858	507.3	1920.3	168	133	170 250	
	HRL-3B	E-3		32.00-4.5	<b>38.7</b>	983	<b>111.8</b>	2840	<b>42.4</b>	1077	<b>50.7</b>	1288	184	114	996.0 6426			60	48	305 450	
49/75-51	HRL D/L-4B	L-4		36.00-5.0	<b>50.0</b>	1270	<b>127.8</b>	3246	<b>53.9</b>	1369	<b>58.8</b>	1494	159	99	1867.0 12046			114	90		
49.5-57	HRL D/L-4B	L-4		36.00-6.00	<b>49.9</b>	1268	<b>141.8</b>	3601	<b>54.9</b>	1394	<b>61.2</b>	1555	151	94	2169.0 13990	1420.6	5369.8	115	91	200 290	170 250
50/80-57	HRL D/L-4/15C	L-4		36.00-6.00	<b>49.6</b>	1260	<b>140.9</b>	3579	<b>53.2</b>	1352	<b>63.0</b>	1601	148	92	1869.0 12057	1443.0	5454.5	123	97	200 290	150 220
	HRL D/L-4G	L-4		36.00-6.00	<b>49.6</b>	1260	<b>140.9</b>	3579	<b>53.2</b>	1352	<b>63.0</b>	1601	148	92	1869.0 12057	1443.0	5454.5	123	97	200 290	150 220
52/80-57	DRL 4/15C	L-4	N A	36.00-6.00	<b>52.0</b>	1321	<b>140.9</b>	3579	<b>55.2</b>	1403	<b>63.0</b>	1601	148	92	1958.0 12629			123	97	<sup>^</sup> 165 <sup>^</sup> 240	<sup>^</sup> 120 <sup>^</sup> 175
	HRL D/L-4G	L-4	N A	36.00-6.00	<b>52.0</b>	1321	<b>140.9</b>	3579	<b>55.2</b>	1403	<b>63.0</b>	1601	148	92	1958.0 12629			123	97	<sup>^</sup> 240 <sup>^</sup> 350	<sup>^</sup> 200 <sup>^</sup> 290
53/80R63	RM-3A	E-3	N L E A	36.00-5.0	<b>52.8</b>	1341	<b>149.3</b>	3792	<b>60.6</b>	1539	<b>66.2</b>	1681	141.2	87.7	2230.0 14388	2025.0	7665.0	80	63.5	1200 1750	920 1345
	RM-4A+ #	E-4+	N L E A	36.00-5.0	<b>52.8</b>	1341	<b>149.3</b>	3792	<b>60.6</b>	1539	<b>66.2</b>	1681	141.2	87.7	2200.0 14194	1925.0	7287.0	132	104	1070# 1560#	820# 1195#
	RM-4B+ #	E-4+	N L E A	36.00-5.0	<b>52.8</b>	1341	<b>149.3</b>	3792	<b>60.6</b>	1539	<b>66.2</b>	1681	141.2	87.7	2200.0 14194	1915.0	7249.0	140	110	1016# 1480#	780# 1135#
59/80R63	RH-4A+ #	E-4+	N L E A	44.0/5.0	<b>58.9</b>	1496	<b>158.4</b>	4023			<b>69.9</b>	1775	133	82		2600.0	9842.0	145	116	1300# 1900#	995# 1450#
	RM-3A #	E-3	N L E A	44.00-5.0	<b>58.9</b>	1496	<b>158.4</b>	4023	<b>68.1</b>	1730	<b>69.9</b>	1775	133	82.6	2560.0 016516	2800.0	10599.0	89	70	1500# 2200#	1150# 1675#
	RM-4A+ #	E-4+	N L E A	44.00-5.0	<b>58.9</b>	1496	<b>158.4</b>	4023	<b>68.1</b>	1730	<b>69.9</b>	1775	133	82.6	2500.0 016129	2600.0	9842.0	146	116	1300# 1900#	995# 1450#

109

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

BIAS	PSI KPA	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550				
41.25/70-39	LBS KG	64000 29000	66000(34) 30000(34)	69500 31500	71500 32500	74000 33500	78500 35500	80500 36500	82500(42) 37500(42)	85500 38750	88000 40000	91000 41250				
37.5-51	LBS KG	66000 30000	69500 31500	74000 33500	76000 34500	78500 35500	82500 37500	85500(36) 38750(36)	88000 40000	91000 41250	93500 42500	93500(44) 42500(44)				
BIAS	PSI KPA	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550				
49/75-51	LBS KG	107500 48750	113500 51500	117000 53000	123500(40) 56000(40)	128000 58000	132500 60000	135500(48) 61500(48)	139000 63000	143500(54) 65000(54)	147500 67000	152000 69000	156500(62) 71000(62)	161000 73000	171000(68) 77500(68)	176500(74) 80000(74)
49.5-57	LBS KG	128000 58000	132500 60000	139000 63000	143500 65000	152000(44) 69000(44)	156000 71000	161000 73000	165000 75000	171000 77500	176500 80000	182000(60) 82500(60)	187500 85000	187500 85000	193000(68) 87500(68)	
50/80-57	LBS KG	128000 58000	135500 61500	139000 63000	147500 67000	152000(44) 69000(44)	156500 71000	161000 73000	165500 75000	171000 77500	176500 80000	182000(60) 82500(60)	187500 85000	193000 87500	198500(68) 90000(68)	
BIAS	PSI KPA	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	94 650	102 700
52/80-57	LBS KG	135500 61500	139000 63000	147500 67000	152000 69000	161000(44) 73000(44)	165500 75000	171000 77500	176500 80000	182000 82500	187500 85000	193000 87500	198500 90000	204000(68) 92500(68)		

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

BIAS	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	
37.5-51	LBS KG	37500 17000	39700 18000	43000 19500	45400 20600	48100 21800	50700 23000	53600(36) 24300(36)	55100 25000	58400 26500	60000(44) 27250(44)	
RADIAL	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700
53/80R63	LBS KG	132500 60000	135500 61500	143500 65000	147500 67000	152000 69000	156500 71000	161000 73000	165500 75000	171000 77500	176500 80000	182000** 82500**
59/80R63	LBS KG	156500 71000	165500 75000	171000 77500	176500 80000	182000 82500	187500 85000	198500 90000	204000 92500	209500 95000	215000 97500	220500** 100000**

Legend

▲ Permafoam inflation or special rim required

WIDE BASE SIZE

## 65 SERIES SIZE

## DIMENSIONAL DATA

## RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY							
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph					
22/65R25	AT-2A	L-3		14.00-1.5	21.5	546	54.5	1384	24.6	625	23.9	607	389	243	284.0 1848	110.1 416.6	27 22	<sup>^</sup> 90 <sup>^</sup> 130	<sup>^</sup> 75 <sup>^</sup> 110	
25/55R25	GP-2A	L-2		17.00-2.0	24.6	625	54.2	1378	26.5	673	23.4	594	387	241	330.0 2130	121.4 459.8	34 27			
25/65R25	RL-3F	E-3		19.50-2.0	25.5	647	58.5	1486	27.4	696	26.6	676	359	223	270.0 1740	161.4 611.0	40 32		125 180	
30/65R25 (750/65R25)	GP-3D	E-3T	N E	24.00-3.0	30.3	769	64.1	1628	33.9	862	28.9	735	328	204	461.0 2976	225.0 852.0	47 37	162 240	120 180	78 110
	GP-3D	L-3T	N E	24.00-3.0	30.3	769	64.1	1628	33.9	862	28.9	735	328	204	461.0 2976	225.0 852.0	47 37			
550/65R25	GP-3D	L-3T		24.00-3.0	30.2	767	64.1	1628	34.0	864	28.4	721	328	204	450.0 2903	219.9 833.1	54 43			
555/65R25 (22/65R25)	AT-2A	E-3		14.00-1.5	21.5	546	54.5	1384	23.9	607	24.3	617	386	240	290.0 1874	100.0 379.0	37 29			
	AT-2A	L-3		14.00-1.5	21.5	546	54.5	1384	24.6	625	23.9	607	385	240	278.0 1794	110.1 416.6	27 22	195 280		
													385	240	278.0 1793	110.1 416.6	27 22			

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

## Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	58 400	62 425	65 450	69 475	73 500				
22/65R25 ( 555/65R25 )	LBS KG	17100 7750	17600 8000	18200 8250	19300 8750	19800* 9000*				
	LBS KG	17100 7750	17600 8000	18200 8250	19300 8750	19800* 9000*				
555/65R25	PSI KPA	58 400	62 425	65 450	69 475					
25/55R25 ( 650/55R25 )	LBS KG	17600 8000	18700 8500	19300 8750	20400* 9250*					
	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	
25/65R25	LBS KG	19800 9000	20400 9500	21500 9750	22700* 10300*	23400 10600	24000 10900	25400 11500	26000 11800	26800 12150
										27600** 12500**
30/65R25	LBS KG	30000 13600	30900 14000	33100 15000	34200* 15500*	35300 16000	36400 16500	37500 17000	38600 17500	39700 18000
	LBS KG	16500 7500	17600 8000	18200 8250	18700* 8500*	19800 9000	20400 9250	20900 9500	22000 10000	22700 10300
550/65R25	LBS KG									23400** 10600**

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	
22/65R25 ( 555/65R25 )	LBS KG	6950 3150	7600 3450	8250 3750	8800 4000	9350 4250	9900 4500	10500 4750	11000* 5000*	
	LBS KG	6950 3150	7600 3450	8250 3750	8800 4000	9350 4250	9900 4500	10500 4750	11000* 5000*	
555/65R25	LBS KG									

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD ARTICULATED DUMP SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	
25/65R25	LBS KG	8800 4000	9650 4375	10500 4750	11000 5000	12000 5450	12800* 5800*	13600 6150	13900 6300	14800 6700	15700** 7100**	
	LBS KG	13200 6000	14300 6500	15700 7100	17100 7750	18200 8250	19300* 8750*	20400 9250	21500 9750	22700 10000	23400** 10600**	
30/65R25	LBS KG											

#### Legend

▲ Permafoam inflation or special rim required

## 65 SERIES SIZE

## DIMENSIONAL DATA

RADIAL



BIAS



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY			
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	
600/65R25	GP-3D	E-3T	N E	17.00-2.0	23.4 594	<b>56.9</b> 1445	26.7 678	25.4 646	369 229	308.0 1984	128.0 485.4	42 33	132 190	99 140	66 100	
	GP-3D	L-3T	N E	17.00-2.0	23.4 594	<b>56.9</b> 1445	26.3 668	25.3 643	369 229	324.0 2087	128.0 485.4	42 33				
650/55R25	GP-2A	L-2		E	17.00-2.0	24.6 625	<b>54.2</b> 1378	26.5 673	23.4 594	387 241	330.0 2130	121.4 459.8	34 27			
650/65R25	GP-3D	E-3T	N E	19.5-2.5	26.3 668	<b>58.7</b> 1491	29.5 749	26.2 665	357 222	355.0 2290	150.0 568.0	44 35	144 210	108 160	73 110	
	GP-3D	L-3T	N E	19.5-2.5	26.3 668	<b>58.7</b> 1491	29.5 749	26.2 665	357 222	355.0 2290	150.0 568.0	44 35				
750/65R25 (30/65R25)	GP-3D	L-3T	N E	24.00-3.0	30.3 769	<b>64.1</b> 1628	33.9 862	28.9 735	328 204	461.0 2976	225.0 852.0	47 37				
	RL-2+	L-3+T	N	24.00-3.0	30.2 767	<b>64.1</b> 1628	34.0 864	28.4 721	328 204	450.0 2903	219.9 833.1	54 43				
	TL-3A+	E-3+T	N E	24.00-3.0	30.5 776	<b>63.9</b> 1622	34.5 875	28.0 711	328 205	450.0 2903	220.0 833.0	58 46	155 230	115 170	75 110	
	TL-3A+	L-3+T	N E	24.00-3.0	30.5 776	<b>63.9</b> 1622	33.5 851	28.1 714	328 205	450.0 2903	220.0 833.0	58 46	155 230	115 170	75 110	
30/65-29	NRL D/L-5A	L-5		24.00-3.0	30.4 772	<b>71.3</b> 1811	33.1 841	32.6 828	289 180	436.0 2813	170.7 646.0	111 88		50 70	45 70	

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

## Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625
<b>600/65R25</b>	LBS KG	<b>19300</b> 8750	<b>19800</b> 9000	<b>20900</b> 9500	<b>21500*</b> 9750*	<b>22700</b> 10300	<b>23400</b> 10600	<b>24000</b> 10900	<b>24700</b> 11200	<b>26000</b> 11800	<b>26800**</b> 12150**
<b>650/65R25</b>	LBS KG	<b>22000</b> 10000	<b>23400</b> 10600	<b>24000</b> 10900	<b>25400*</b> 11500*	<b>26000</b> 11800	<b>26800</b> 12150	<b>28300</b> 12850	<b>29100</b> 13200	<b>30000</b> 13600	<b>30900**</b> 14000**
<b>750/65R25</b>	LBS KG	<b>30000</b> 13600	<b>30900</b> 14000	<b>33100</b> 15000	<b>34200*</b> 15500*	<b>35300</b> 16000	<b>36400</b> 16500	<b>37500</b> 17000	<b>38600</b> 17500	<b>39700</b> 18000	<b>41900**</b> 19000**
RADIAL	PSI KPA	58 400	62 425	65 450	69 475						
<b>650/55R25</b> ( 25/55R25 )	LBS KG	<b>17600</b> 8000	<b>18700</b> 8500	<b>19300</b> 8750	<b>20400*</b> 9250*						
BIAS	PSI KPA	47 325	51 350	54 375	58 400						
<b>30/65-29</b>	LBS KG	<b>28300</b> 12850	<b>29100(20)</b> 13200(20)	<b>30900</b> 14000	<b>32000(24)</b> 14500(24)						

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	25 175	29 200	33 225	36 250	40 275	44 300	47 325			
<b>650/55R25</b>	LBS KG	<b>7600</b> 3450	<b>8550</b> 3875	<b>9100</b> 4125	<b>9900</b> 4500	<b>10700</b> 4875	<b>11400</b> 5300	<b>12000*</b> 5600	<b>12000*</b> 6000		

### 30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD ARTICULATED DUMP SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	
<b>650/65R25</b>	LBS KG	<b>9900</b> 4500	<b>10700</b> 4875	<b>11700</b> 5300	<b>12300</b> 5600	<b>13200</b> 6000	<b>14300*</b> 6500*	<b>15200</b> 6900	<b>15700</b> 7100	<b>16500</b> 7500	<b>17600**</b> 8000**	

### 30 MPH (50 KM/H) (50kph) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE

RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	
<b>600/65R25</b>	LBS KG	<b>9100</b> 4125	<b>9900</b> 4500	<b>10700</b> 4875	<b>11400</b> 5150	<b>12300</b> 5600	<b>13200*</b> 6000*	<b>13900</b> 6300	<b>14300</b> 6500	<b>15200</b> 6900	<b>16100**</b> 7300**	
<b>650/65R25</b>	LBS KG	<b>10500</b> 4750	<b>11400</b> 5150	<b>12300</b> 5600	<b>13200</b> 6000	<b>14300</b> 6500	<b>15200*</b> 6900*	<b>16100</b> 7300	<b>16500</b> 7500	<b>17600</b> 8000	<b>18200**</b> 8250**	
<b>750/65R25</b>	LBS KG	<b>13600</b> 6150	<b>14800</b> 6700	<b>16100</b> 7300	<b>17100</b> 7750	<b>18700</b> 8500	<b>19800*</b> 9000*	<b>20900</b> 9500	<b>22000</b> 10000	<b>22700</b> 10300	<b>24000**</b> 10900**	

114

Legend

▲ Permafoam inflation or special rim required

## 65 SERIES SIZE

## DIMENSIONAL DATA

RADIAL

GP-4D Hi-Stability  
GP-4D

RL-4D



RL-4K Hi-Stability

BIAS



NDL D/L-5/15C



NRL D/L-5A



NRL D/L-4A



NRL D/L-4A



NSM D/L-5B

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	Type 2 mph tkph				Type 4 mph tkph	Type 6 mph tkph		
775/65R29 (800/65R29)	GP-4D	E-4	N E	24.00-3.0	31.2 792	<b>68.9</b> 1749	34.5 876	<b>30.4</b> 772	305 190	556.0 3585	<b>250.0</b> 946.0	67 53	169 250	125 180	105 150				
	GP-4D	L-4	E	24.00-3.0	31.2 792	<b>68.9</b> 1749	34.5 876	<b>29.8</b> 758	305 190	640.0 4130	<b>250.0</b> 946.0	67 53	169 250	125 180	105 150				
	GP-4D Hi-Stability	E-4	N E	24.00-3.0	31.2 792	<b>68.9</b> 1749	34.5 876	<b>30.4</b> 772	305 190	556.0 3585	<b>250.0</b> 946.0	67 53	169 250	125 180	105 150				
	GP-4D Hi-Stability	L-4	E	24.00-3.0	31.2 792	<b>68.9</b> 1749	34.5 876	<b>29.8</b> 758	305 190	640.0 4130	<b>250.0</b> 946.0	67 53	169 250	125 180	105 150				
	800/65R29 (775/65R29)	GP-4D	E-4	N	24.00-3.0	31.2 792	<b>68.9</b> 1749	34.5 876	<b>30.4</b> 772	305 190	556.0 3585	<b>250.0</b> 946.0	67 53	169 250	125 180	105 150			
875/65R29	GP-4D	E-4	N L E A	27.00-3.0	33.9 861	<b>74.0</b> 1880	37.0 939	<b>32.7</b> 830	282 176	552.0 3561	<b>325.0</b> 1230.0	72 57	190 280	150 220	125 180				
	GP-4D	L-4	N E	27.00-3.0	33.9 861	<b>74.0</b> 1880	37.0 939	<b>32.7</b> 830	282 176	676.0 4362	<b>325.0</b> 1230.0	72 57	190 280	150 220	125 180				
	GP-4D Hi-Stability	E-4	N L E A	27.00-3.0	33.9 861	<b>74.0</b> 1880	37.0 939	<b>32.7</b> 830	282 176	552.0 3561	<b>325.0</b> 1230.0	72 57	190 280	150 220	125 180				
	GP-4D Hi-Stability	L-4	N E	27.00-3.0	33.9 861	<b>74.0</b> 1880	37.0 939	<b>32.7</b> 830	282 176	676.0 4362	<b>325.0</b> 1230.0	72 57	190 280	150 220	125 180				
	RL-4D	L-4	N	27.00-3.0	33.9 860	<b>74.0</b> 1880	37.7 958	<b>32.3</b> 820	284 176	782.0 4698	<b>323.0</b> 1223.0	72 57	190 280	150 220	125 180				
	RL-4K Hi-Stability	L-4	N E	27.00-3.0	33.9 861	<b>74.0</b> 1880	38.1 968	<b>32.7</b> 831	309 192	676.0 4362	<b>325.0</b> 1230.0	72 57	190 280	150 220	125 180				
	RL-4K Hi-Stability	L-4	N L E A	27.00-3.0	33.9 861	<b>74.0</b> 1880	38.1 968	<b>32.7</b> 831	309 192	676.0 4362	<b>325.0</b> 1230.0	72 57	190 280	150 220	125 180				
	NDL D/L-5/15C	L-5	N	28.00-3.5	<b>35.7</b> 907	<b>80.5</b> 2045	<b>38.7</b> 983	<b>36.7</b> 932	253 157	652.0 4207	<b>311.4</b> 1178.7	122 96	190 280	150 220	125 180				
35/65-33	NRL D/L-4A	E-4		28.00-3.5	<b>35.7</b> 907	<b>80.5</b> 2045					<b>382.9</b> 1449.4	74 59	190 280	150 220	125 180	115 170	95 140	75 110	
	NRL D/L-4A	L-4	N A	28.00-3.5	<b>35.7</b> 907	<b>80.5</b> 2045					<b>382.9</b> 1449.4	74 59	190 280	150 220	125 180	90 130	75 110	60 90	
	NRL D/L-5A	L-5	N L A	28.00-3.5	<b>35.5</b> 901	<b>80.2</b> 2037	<b>38.7</b> 983	<b>36.9</b> 937	253 157	652.0 4207	<b>311.4</b> 1178.7	122 96	190 280	150 220	125 180		^65 ^100	^60 ^90	
	NSM D/L-5B	L-5S	N	28.00-3.5	<b>35.7</b> 907	<b>80.5</b> 2045	<b>38.7</b> 983	<b>36.7</b> 932	253 157	652.0 4207	<b>311.4</b> 1178.7	122 96	190 280	150 220	125 180				

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

LegendN = North America  
L = Latin AmericaE = Europe / Africa / Mid East  
A = Asia / Australia# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625
775/65R29 ( 800/65R29 )	LBS KG	33100 14500	34200 15500	35300 16000	37500* 17000*	38600 17500	39700 18000	40800 18500	41900 19000	44100 20000	45400** 20600**
	LBS KG	33100 14500	34200 15500	35300 16000	37500* 17000*	38600 17500	39700 18000	40800 18500	41900 19000	44100 20000	45400** 20600**
RADIAL	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700
	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700
875/65R29	LBS KG	46700* 21200*	48100 21800	49400 22400	52000 23600	53600 24300	55100 25000	56800** 25750**	58400 26500	60000 27250	61500 27500
	PSI KPA	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550
BIAS	LBS KG	39700 18000	41900(24) 19000(24)	43000 19500	44100 20000	46700 21200	48100(30) 21800(30)	49400 22400	50700 23000	52000(36) 23600(36)	53600 24300
	PSI KPA	39700 18000	41900(24) 19000(24)	43000 19500	44100 20000	46700 21200	48100(30) 21800(30)	49400 22400	50700 23000	52000(36) 23600(36)	53600 24300
<b>25 MPH (40 KM/H) 25MPH (40km/HR)Underground Haulage Service</b>											
RADIAL	PSI KPA	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725
	PSI KPA	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725
875/65R29	LBS KG	40800 18500	41900 19000	44100 20000	45400 20600	46700 21200	48100 21800	49400 22400	50700 23000	52000 23600	53600 24300
	PSI KPA	40800 18500	41900 19000	44100 20000	45400 20600	46700 21200	48100 21800	49400 22400	50700 23000	52000 23600	53600 24300
<b>30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD HAULAGE SERVICE</b>											
RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425
	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425
875/65R29	LBS KG	19300 8750	20900 9500	22700 10300	24700 11200	26000 11800	27600* 12500*	29100 13200	30900 14000	33100 15000	34200** 15500**
	PSI KPA	19300 8750	20900 9500	22700 10300	24700 11200	26000 11800	27600* 12500*	29100 13200	30900 14000	33100 15000	34200** 15500**
<b>30 MPH (50 KM/H) MAXIMUM SPEED OFF-THE-ROAD ARTICULATED DUMP SERVICE</b>											
RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425
	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425
800/65R29 ( 775/65R29 )	LBS KG	16100 7300	17600 8000	18700 8500	20400 9250	21500 9750	22700* 10300*	24000 10900	25400 11500	26800 12150	28300** 12850**
	PSI KPA	16100 7300	17600 8000	18700 8500	20400 9250	21500 9750	22700* 10300*	24000 10900	25400 11500	26800 12150	28300** 12850**
<b>30 MPH (50 KM/H) 50KPH MAXIMUM SPEED OFF-THE-ROAD SERVICE</b>											
RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425
	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425
775/65R29 ( 800/65R29 )	LBS KG	15700 7100	17100 7750	18200 8250	19800 9000	20900 9500	22000* 10000*	23400 10600	24700 11200	26000 11800	27600** 12500**
	PSI KPA	15700 7100	17100 7750	18200 8250	19800 9000	20900 9500	22000* 10000*	23400 10600	24700 11200	26000 11800	27600** 12500**

116

Legend

▲ Permafoam inflation or special rim required

## 65 SERIES SIZE

## RADIAL

RL-3S  
RL-4K Hi-Stability  
RL-4K  
RL-4K 20/20RL-4K Hi-Stability  
RL-4K  
RL-4K 20/20RL-5K Hi-Stability  
RL-5K  
RL-5K (20/20)RL-4K Hi-Stability  
RL-4K  
RL-4K 20/20

## DIMENSIONAL DATA

## BIAS



NRL D/L-5A

RL-5S  
RL-4SRT-5D Hi-Stability  
RT-4D Hi-Stability

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY				
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph		
35/65R33 (875/65R33)	RL-4K	L-4	N E A	28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	425.0 1609.0	73 58
	RL-4K 20/20	L-4		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	425.0 1609.0	73 58
	RL-5K	L-5		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	411.0 1555.6	120 95
	RL-5K (20/20)	L-5		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	411.0 1555.6	120 95
	RL-5K 05/10	L-5		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	411.0 1555.6	120 95
	RL-5S	L-5S		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	411.0 1555.6	120 95
875/65R33 (35/65R33)	RL-3S	L-3S	N L E A	28.00-3.5	35.9	912	82.1	2085	38.9	988	36.9	937	257	159.7	771.4 4977	425.0 1609.0	61 48.3
	RL-4K Hi-Stability	E-4		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	425.0 1609.0	73 58
	RL-4K Hi-Stability	L-4		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	425.0 1609.0	73 58
	RL-4K Hi-Stability 00/20	L-4		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	425.0 1609.0	73 58
	RL-4S	L-4S		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	256	159	686.0 4426	425.0 1609.0	73 58
	RL-5K (20/20)	L-5		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	411.0 1555.6	120 95
	RL-5K Hi-Stability	L-5		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	411.0 1555.6	120 95
	RL-5K Hi-Stability	L-5		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	411.0 1555.6	120 95
	RL-5S	L-5S		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	411.0 1555.6	120 95
	RT-4D Hi-Stability	E-4		28.00-3.5	35.6	904	81.9	2080	38.6	980	36.9	937	265	164.7	816.3 5266	400.0 1514.0	81 64
	RT-4D Hi-Stability	L-4		28.00-3.5	35.6	904	81.9	2080	38.6	980	36.9	937	265	164.7	816.3 5266	400.0 1514.0	81 64
	RT-5D Hi-Stability	L-5		28.00-3.5	35.6	904	81.9	2080	38.6	980	36.9	937	265	164.7	816.3 5266	350.0 1325.0	120 95.3
	NRL D/L-5A	L-5		32.00-4.0	42.4	1077	94.4	2398	45.9	1166	43.3	1100	216	134	927.0 5981	457.3 1731.0	137 109
	Sizes in bold type can be obtained in locations in bold. Extended lead time may be needed in other locations.				Legend		N = North America		E = Europe / Africa / Mid East		# = Estimated Data		^ = Work Capability Factor				
					L = Latin America		A = Asia / Australia		* = Tube Type Tire								

117

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	
RADIAL  35/65R33 ( 875/65R33 )	LBS KG	43000 19500	45400 20600	46700 21200	49400 22400	50700* 23000*	52000 23600	55100 25000	56800 25750	58400 26500	60000 27250	61500** 28000**	
	LBS KG	74000 33500	76000 34500	80500 36500	82500 37500	88000* 40000*	91000 41250	93500 42500	96500 43750	99000 45000	102000 46250	104500** 47500**	
RADIAL  875/65R33 ( 35/65R33 )	PSI KG	73 23000*	76 23600	80 25000	83 25750	87 26500	91 27250	94 28000*	98 29000	102 30000	105 30750	109 31500	
	PSI KPA	500 325	525 350	550 375	575 400	600 425	625 450	650 475	675 500	700 500	725 500	750 500	
BIAS  40/65-39	LBS KG	52000 23600	55100 25000	56800 25750	60000(30) 27250(30)	61500 28000	64000 29000	66000 30000	68000(36) 30750(36)				

### 25 MPH (40 KM/H) 25MPH (40km/HR)Underground Haulage Service

	PSI KPA	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800
RADIAL  875/65R33 ( 35/65R33 )	LBS KG	44100 20000	46700 21200	48100 21800	49400 22400	50700 23000	52000 23600	53600 24300	55100 25000	56800 25750	58400 25750	60000 27250	61500 28000	64000(****) 29000(****)

Legend

▲ Permafoam inflation or special rim required

## 65 SERIES SIZE

## DIMENSIONAL DATA

RADIAL



RL-4K RL-5K (20/20) RL-5K 05/05



NDL D/L-5/15C



NRL D/L-5A

BIAS

	RADIAL	BIAS
RL-4K		
RL-5K (20/20)		
RL-5K 05/05		

RL-4K	RL-5K (20/20)	RL-5K	NDL D/L-5/15C	NRL D/L-5A
RL-4K 20/20		RL-5K		

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revolution Per mi km	Gross Contact Area in2 cm2	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY			
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm	Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph	Type 2 mph tkph				Type 4 mph tkph	Type 6 mph tkph			
45/65R39 (1150/65R39)	RL-4K	L-4		36.00-4.5	45.0	1143	101.6	2578	49.8	1264	44.9	1140	207	129	1046.0 6745	825.0	3123.0	89	71	
	RL-5K (20/20)	L-5	N	36.00-4.5	45.5	1156	101.5	2577	51.9	1318	44.8	1139	213	132	1256.0 8106	750.0	2839.0	146	116	
1150/65R45 (45/65R45)	RL-4K	L-4		36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	900.0	3407.0	89	71	
	RL-4K 20/20	L-4		36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	900.0	3407.0	89	71	
	RL-5K	L-5	N	36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	825.0	3123.0	149	118	
	RL-5K (20/20)	L-5		36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	825.0	3123.0	149	118	
	RL-5K 05/05	L-5	N	36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	825.0	3123.0	149	118	
45/65-45	NDL D/L-5/15C	L-5	N	A	36.00-4.5	45.0	1143	107.6	2733	48.5	1232	49.4	1255	190	118	1050.0 6775	738.2	2794.3	148	117
	NRL D/L-5A #	L-5	N	A	36.00-4.5	45.0	1143	107.6	2733	48.5	1232	49.4	1255	190	118	1050.0 6775	738.2	2794.3	145	115
45/65R45 (1150/65R45)	RL-4K	L-4		36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	900.0	3407.0	89	71	
	RL-4K 20/20	L-4		36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	900.0	3407.0	89	71	
	RL-5K	L-5		36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	825.0	3123.0	149	118	
	RL-5K (20/20)	L-5		36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	825.0	3123.0	149	118	
	RL-5K 05/05	L-5		36.00-4.5	45.0	1143	107.8	2737	49.4	1255	48.0	1218	195	119	1195.0 7704	825.0	3123.0	149	118	
50/65-51	NRL D/L-5A	L-5		40.00-4.5	51.4	1306	120.5	3061	56.0	1422	54.6	1387	171	106	1630.0 10514	846.0	3202.1	160	127	

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

LegendN = North America  
L = Latin AmericaE = Europe / Africa / Mid East  
A = Asia / Australia# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) MAXIMUM SPEED OFF-THE-ROAD SLOW SPEED SERVICE

RADIAL	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650				
45/65R39 (1150/65R39)	LBS KG	74000 33500	76000 34500	80500 36500	82500 37500	88000* 40000*	91000 41250	93500 42500	96500 43750	99000 45000	102000 46250	104500** 47500**				
	LBS KG	78500 35500	82500 37500	85500 38750	88000 40000	93500* 42500*	96500 43750	99000 45000	102000 46500	104500 47500	110000 50000	113500** 51500**				
45/65R45	LBS KG	78500 35500	82500 37500	85500 38750	88000 40000	93500* 42500*	96500 43750	99000 45000	102000 46250	104500 47500	110000 50000	113500** 51500**				
	PSI KPA	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575				
BIAS	LBS KG	71500 32500	76000 34500	78500 35500	82500 37500	85500(38) 38750(38)	88000 40000	91000 41250	93500 42500	96500(46) 43750(46)	99000 45000	102000 46250	104500 47500	104500 47500	107500 48750	110000(58) 50000(58)
	PSI KPA	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675
50/65-51	LBS KG	93500 42500	96500 43750	102000 46250	104500 47500	107500 48750	113500 51500	117000(46) 53000(46)	120000 54500	123500 56000	128000 58000	128000(54) 58000(54)	132500 60000	135500 61500	139000(62) 63000(62)	

Legend

▲ Permafoam inflation or special rim required

## METRIC SIZE - HIGH SPEED

## DIMENSIONAL DATA

## RADIAL



Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	Min. Dual Spacing in mm	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in <sup>2</sup> cm <sup>2</sup>	Tire Volume gal ltrs	Tread Depth 1/32 in mm	PERFORMANCE CAPABILITY		
						Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm					Type 2 mph tkph	Type 4 mph tkph	Type 6 mph tkph
445/90R21	AT-2A	E-3		10.00-1.5	<b>20.2</b> 513	17.1 434	52.1 1323	18.8 478	23.6 599	403 250	178.0 1148	8.0 303.0	33 26			
385/95R24	GP-2B	E-3		10.00W	17.7 450	15.2 386	53.5 1359	15.5 394	24.9 632	392 244	152.0 981		30 24			
	MC-1A	E-1		10.00W	17.7 450	14.7 373	53.5 1359	16.0 406	24.7 627	393 244	123.0 794	75.0 284.0	31 24			
385/95R25	GP-2B	E-3	N E	10.00-1.5	17.7 450	15.2 386	53.5 1359	15.5 394	24.9 632	392 244	152.0 982		30 24			
	MC-1A	E-1		10.00-1.5	17.7 450	14.3 363	53.7 1394	15.6 396	24.0 610	391 243	123.0 793	68.7 260.1	31 25			
395/80R25	GP-2B	E-3	E	12.00-1.3		15.6 396	50.3 1278	17.2 436	22.8 580	419 260	198.0 1277		30 24			
445/80R25	GP-2B	E-3	E	14.00-1.5		17.4 442	53.2 1351	19.1 485	24.6 625	395 245	178.0 1148	87.6 331.6	32 25			
445/95R25	GP-2B	E-3	N E A	11.25-2.0	<b>20.2</b> 513	17.2 438	58.6 1489	19.0 482	27.3 693	358 223	194.0 1251	96.2 364.3	34 27			
	MC-1A	E-1		11.25-2.0		16.9 429	59.0 1499	18.6 472	27.2 691	356 221	197.0 1271	101.7 385.0	31 25			
555/65R25	AT-2A	E-3		14.00-1.5		21.5 546	54.5 1384	23.9 607	24.3 617	385 240	278.0 1794	110.1 416.6	27 22	<b>195</b> 280		
605/80R25	GP-2B	E-3		19.5-2.5		24.1 612	63.3 1608	26.8 680	29.4 746	332 206	265.0 1710	192.6 728.0	39 31			

121

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 45 MPH (70 KM/H) MAXIMUM SPEED SERVICE

	PSI KPA	105 725	109 750	116 800	131 900	141 975				
RADIAL 385/95R24	LBS	11700	12000	12300(L)	13270(M)	13930(N)				
	KG	5300	5450	5600(L)	6000(M)	6300(N)				
RADIAL 385/95R25	LBS	11700	12000	12300(L)	13270(M)	13930(N)				
	KG	5300	5450	5600(L)	6000(M)	6300(N)				
	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650			
					98 675		102 700			
RADIAL 445/80R25	LBS	10500	11000	11400	11700	12000	12300	12800	13200(170E)	
	KG	4750	5000	5180	5300	5400	5600	5800	6000(170E)	
RADIAL 605/80R25	LBS	17600	18200	18700	19300	20400	20900	21500	22000(188E)	
	KG	8000	8250	8500	8750	9250	9500	9750	10000(188E)	
	PSI KPA	105 725	109 750	112 775	116 800	120 825	123 850	127 875	131 900	
RADIAL 445/95R25	LBS	13600	13900	14300	14800	14800	15200	15700	16100(177E)	
	KG	6150	6300	6500	6700	6700	6900	7100	7300(177E)	
	PSI KPA	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650
RADIAL 555/65R25 ( 22/65R25 )	LBS	10700	11000	11700	12000	12300	12800	13200	13600	13900(172E)
	KG	4875	5000	5300	5450	5600	5800	6000	6150	6300(172E)

### 55 MPH (90 KM/H) MAXIMUM SPEED SERVICE

	PSI KPA	65 450	70 480	75 520	80 550	85 590	90 620	95 660	100 690	105 720	110 760
RADIAL 445/90R21 ( 16.00R21 )	LBS	9990	10560	11110	11650	12160	12660	13150	13900(L)	14350	14800(M)
	KG	4530	4790	5040	5280	5520	5740	5960	6300(L)	6500	6700(M)
RADIAL 385/95R24	PSI KPA	65 450	70 475	75 525	80 550	85 575	90 625	95 650	100 700	105 725	110 750
	LBS	8150	8620	9070	9500	9930	10340	10730	11400(J)	11700	12000
RADIAL 385/95R25	KG	3700	3910	4110	4310	4500	4690	4870	5150(J)	5300	5450
	LBS	8150	8620	9070	9500	9930	10340	10730	11400(J)	11700	12000
RADIAL 445/95R25	KG	3700	3910	4110	4310	4500	4690	4870	5150(J)	5300	5450
	PSI KPA	110 750									
RADIAL 445/95R25	LBS	16100(177E)									
	KG	7300(177E)									

122

Legend

▲ Permafoam inflation or special rim required

METRIC SIZE

## MINE SERVICE

## DIMENSIONAL DATA

RADIAL



BIAS



RL-5K (12/12) RL-5K (24/24)

UMS-3B



Traction Mine Svc Xtra Traction Grip



XTRA Traction WL

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi	Gross Contact Area in2	Tread Depth 1/32 in	
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm								
15L-10NHS	*	UMS-3B		13.00B	14.4	366	27.7	704	15.1	384	12.8	325	747	464	80.0 516	27 21
27X15-10NHS	*	UMS-3B		13.00B	14.4	366	27.7	704	15.1	384	12.8	325	747	464	80.0 516	27 21
27X9-10NHS	*	UMS-3B	N	6.00SP	9.5	241	26.7	678								25 20
24X12-12NHS		XTR-3B	N	9	11.8	300	24.8	630	12.4	315	11.3	287	838	521	50.0 323	23 18
10.00L-15NHS (36X11-15)	*	Traction Mine Svc		7.50V	11.0	279	36.5	927	12.3	312	16.7	424	569	354	94.0 606	27 21
	*	Xtra Traction WL		7.50V	11.2	284	36.1	917	12.5	318	16.6	422	574	357	91.0 587	27 21
14.50L-15NHS (35X15-15)	*	Traction Mine Svc		11.5	14.2	361	35.2	894	15.5	394	16.4	417	586	364	120.0 774	31 25
		Xtra Traction WL		11.5	14.2	361	35.4	899	15.5	394	16.4	417	586	364	120.0 774	31 25
32X12-15NHS	*	Xtra Traction Grip		9.75BD	12.1	307	32.3	820	13.3	338	15.1	384	638	396	80.0 516	26 21
32X14.50-15NHS (32X15-15)	*	Traction Mine Svc		11.5	14.2	361	32.8	833	14.6	371	15.1	384	632	393	86.0 555	31 25
		Xtra Traction WL		11.5	14.2	361	33.1	841	14.6	371	15.1	384	632	393	86.0 555	31 25
32X15-15NHS (32X14.50-15)	*	Traction Mine Svc	N	11.5	14.2	361	32.8	833	14.6	371	15.1	384	632	393	86.0 555	31 25
		Xtra Traction WL	N	11.5	14.2	361	33.1	841	14.6	371	15.1	384	632	393	86.0 555	31 25
35X15-15NHS (14.50L-15)	*	Traction Mine Svc		11.5	14.2	361	35.2	894	15.5	394	16.4	417	586	364	120.0 774	31 25
		Xtra Traction WL		11.5	14.2	361	35.4	899	15.5	394	16.4	417	586	364	120.0 774	31 25
35X15R15NHS		RL-5K (12/12)	L-5	11.5	14.4	366	34.9	886	15.7	398	15.4	391	611	379	87.0 559	60 48
		RL-5K (24/24)	L-5	11.5	14.4	366	34.9	886	15.7	398	15.4	391	611	379	87.0 559	60 48

123

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

LegendN = North America  
L = Latin AmericaE = Europe / Africa / Mid East  
A = Asia / Australia# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

# LOAD LIMITS AT COLD INFLATION PRESSURES

## 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

BIAS	PSI KPA	95 660	100 690	105 720	110 760	115 790	120 830	125 860	130 900	135 930	140 970	145 1000	150 1030	▲
15L-10NHS ( 27X15-10 )	LBS	6515	6715	6905	7100	7285	7470	7650(20)	7825	8000	8175	8345	8510(24)	
	KG	2955	3045	3130	3220	3305	3390	3470(20)	3550	3630	3710	3785	3860(24)	
27X15-10NHS	LBS	6515	6715	6905	7100	7285	7470	7650(20)	7825	8000	8175	8345	8510(24)	
	KG	2955	3045	3130	3220	3305	3390	3470(20)	3550	3630	3710	3785	3860(24)	
27X9-10NHS	LBS	4405	4540(12)	4675	4800	4930	5050	5175	5295	5415(16)				
	KG	2000	2060(12)	2120	2175	2235	2290	2345	2400	2455(16)				
24X12-12NHS	LBS	5260	5420	5580	5740	5900	6050	6200	6350	6450	6600	6750	6900	7900(24)
	KG	2385	2460	2530	2605	2675	2745	2810	2880	2925	2995	3060	3130	3585(24)
32X12-15NHS	LBS	7150	7400	7600	7800	8000	8200	8400	8600	8800	9000	9150(20)	9350(24)	
	KG	3245	3355	3445	3540	3630	3720	3810	3900	3990	4080	4150(20)	4240(24)	
32X14.50-15NHS	LBS	8350	8600	8850	9100	9300	9550	9800	10000(20)	10200	10500	10700	10900	11100(24)
	KG	3790	3900	4015	4130	4220	4330	4445	4535(20)	4625	4765	4855	4945	5035(24)
32X15-15NHS	LBS	8350	8600	8850	9100	9300	9550	9800	10000(20)	10200	10500	10700	10900	11100(24)
	KG	3790	3900	4015	4130	4220	4330	4445	4535(20)	4625	4765	4855	4945	5035(24)
BIAS	PSI KPA	95 660	100 690	105 720	110 760	115 790	120 830	125 860	130 900	135 930	140 970	145 1000		
10.00L-15NHS ( 36X11-15 )	LBS	7520	7750	7975	8195	8410(16)	8620	8830	9035	9235	9435	9630(20)	10750(24)▲	
	KG	3410	3515	3615	3715	3815(16)	3910	4005	4100	4190	4280	4370(20)	4875(24)▲	
BIAS	PSI KPA	95 660	100 690	105 720	110 760	115 790	120 830	125 860	130 900	135 930	140 970	145 1000	150 1030	▲ ▲
14.50L-15NHS ( 35X15-15 )	LBS	9415	9705	9985	10260	10530	10795	11055	11310(20)	11565	11815	12060	12300	13905(28)▲ 14975(32)▲
	KG	4270	4400	4530	4655	4775	4895	5015	5130(20)	5245	5360	5470	5580	6305(28)▲ 6795(32)▲
35X15-15NHS	LBS	9415	9705	9985	10260	10530	10795	11055	11310(20)	11565	11815	12060	12300	13905(28) 14975(32)
	KG	4270	4400	4530	4655	4775	4895	5015	5130(20)	5245	5360	5470	5580	6305(28) 6795(32)
RADIAL	PSI KPA	105 725	109 750	112 775	116 800	120 825	123 850	127 875	131 900	134 925	138 950	141 975	145 1000	149 1025
35X15R15NHS	LBS	10200	10500	10700	11000	11400	11700	12000	12000	12300	12800	12800	13200	13200 18300
	KG	4625	4750	4875	5000	5150	5300	5450	5450	5600	5800	5800	6000	6000 8300

124

Legend

▲ Permafoam inflation or special rim required

## MINE SERVICE

## RADIAL

RL-5K (12/12)  
RL-5KRL-5K (24/24)  
RL-5K (00/24)

RL-5S



RL-5K (08/08)

## BIAS



Rock Mine Service



SMO-5B



UMS-3A



HR Lug



WRL-3A



Traction Mine Svc



Xtra Traction WL



XTR-3B

## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi	Gross Contact Area in2 cm2	Tread Depth 1/32 in mm	
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm								
36X11-15NHS (10.00L-15)	* Traction Mine Svc * Xtra Traction WL			7.50V	11.0	279	36.5	927	12.3	312	16.7	424	569	354	94.0 606	27 21
36X11R15NHS	RL-5K (12/12) RL-5K (24/24)	L-5		7.5	10.8	274	36.3	922	11.5	291	16.0	405	587	365	58.0 373	60 48
38X16-15NHS	Rock Mine Service XTR-3D			11.5	15.3	389	38.7	983	16.2	411	17.8	452	531	330	145.0 935	27 21
8.25-15NHS	* Traction Mine Svc * Xtra Traction WL			6.50T	10.2	259	34.0	864	11.4	290	15.8	401	607	377	76.0 490	27 21
10.00-20NHS	* HR Lug		N	7.5	10.9	277	42.2	1072	11.8	300	19.9	506	498	309	74.0 477	27 21
12.00-20NHS	* SMO-5B * UMS-3A	L-5S	E	8.5	13.2	335	46.3	1176	14.4	366	20.8	528	457	284	125.0 807	80 64
12.00R20NHS	RL-5K RL-5K (00/24) RL-5K (08/08) RL-5K (12/12) RL-5K (24/24) RL-5S	L-5 L-5 L-5 L-5 L-5 L-5S	N N N N N	8.5 8.5 8.5 8.5 8.5 8.5	12.3 12.3 12.3 12.3 12.3 12.3	312 312 312 312 312 312	47.2 46.6 46.6 46.6 46.6 46.6	1199 1184 1184 1184 1184 1184	13.7 13.7 13.7 13.7 13.7 13.7	348 348 348 348 348 348	20.8 20.8 20.8 20.8 20.8 20.8	528 528 528 528 528 528	451 451 451 451 451 451	280 280 280 280 280 280	165.0 1067 165.0 1067 165.0 1067 165.0 1067 165.0 1067 165.0 1067	78 62 78 62 78 62 78 62 78 62 78 62
14.00-20NHS	* UMS-3A * WRL-3A * XTR-3B		N N A	10.00W 10.00W 10.00W	14.8 14.8 15.8	376 376 401	49.0 49.1 49.2	1245 1247 1250	16.1 16.1 16.1	409 409 409	22.4 22.8 20.8	569 579 528	425 417 451	264 259 280	150.0 968 150.0 968 165.0 1067	33 26 34 27 32 25

125

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

## Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

# LOAD LIMITS AT COLD INFLATION PRESSURES

## 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

BIAS	PSI	95	100	105	110	115	120	125	130	135	140	145	▲
	KPA	660	690	720	760	790	830	860	900	930	970	1000	
<b>36X11-15NHS</b> <i>( 10.00L-15 )</i>	LBS	7520	7750	7975	8195	8410(16)	8620	8830	9035	9235	9435	9630(20)	10750(24)▲
	KG	3410	3515	3615	3715	3815(16)	3910	4005	4100	4190	4280	4370(20)	4875(24)▲
<b>RADIAL</b>	PSI	105	109	112	116	120	123	127	131	134	138	141	145
	KPA	725	750	775	800	825	850	875	900	925	950	975	1000
<b>36X11R15NHS</b>	LBS	8250	8550	8550	8800	9100	9350	9350	9650	9900	10200	10200	10500
	KG	3750	3875	3875	4000	4125	4250	4250	4375	4500	4625	4625	4750
<b>12.00R20NHS</b>	LBS	12300	12800	12800	13200	13600**	13900	13900	14300	14800	15200***	15200	15700
	KG	5600	5800	5800	6000	6150**	6300	6300	6500	6700	6900***	6900	7100
<b>BIAS</b>	PSI	95	100	105	110	115	120	125	130	135	140	145	150
	KPA	660	690	720	760	790	830	860	900	930	970	1000	1030
<b>38X16-15NHS</b>	LBS	11500	11810	12150	12485	12815	13140	13455	13770	14075	14380	14675	14970
	KG	5215	5355	5510	5665	5810	5960	6105	6245	6385	6520	6635	6790
<b>BIAS</b>	PSI	95	100	105	110	115	120	125	130	135	140	▲	
	KPA	660	690	720	760	790	830	860	900	930	970		
<b>8.25-15NHS</b>	LBS	5605	5775	5940	6105	6265	6425	6580	6730	6880	7030(16)	8910(24)▲	
	KG	2540	2620	2695	2770	2840	2915	2985	3055	3120	3190(16)	4040(24)▲	
<b>BIAS</b>	PSI	95	100	105	110								
	KPA	660	690	720	760								
<b>10.00-20NHS</b>	LBS	9350(14)	9650	9900	10200(16)								
	KG	4250(14)	4375	4500	4625(16)								
<b>BIAS</b>	PSI	95	100	105	110	115	120	125	130	135	140	145	150
	KPA	660	690	720	760	790	830	860	900	930	970	1000	1030
<b>12.00-20NHS</b>	LBS	11700	12000(16)	12300	12800	13200	13600(20)	13900	13900	14300	14800	15200(24)	15200
	KG	5300	5450(16)	5600	5800	6000	6150(20)	6300	6500	6500	6700	6900(24)	6900
<b>BIAS</b>	PSI	95	100	105	110	115	120	125	130	135	140	▲	▲
	KPA	660	690	720	760	790	830	860	900	930	970		
<b>14.00-20NHS</b>	LBS	16100	16600(20)	17100	17600	18200	18700(24)	18700	19300	19800	20400(28)	22000(32)▲	28300(48)▲
	KG	7300	7500(20)	7750	8000	8250	8500(24)	8500	8750	9000	9250(28)	10000(32)▲	12850(48)▲

126

Legend

▲ Permafoam inflation or special rim required

## MINE SERVICE

## DIMENSIONAL DATA

RADIAL

RL-4J    RL-5K (24/24)  
RL-5K

BIAS



AMS-4/5A    Rock Mine Service

SMO-5B/C  
SMO-5B

UMS-3A    Xtra Traction WL



XTR-3C

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi	Gross Contact Area in2 cm2	Tread Depth 1/32 in mm		
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm									
42X13-20NHS	*	Xtra Traction WL		9.5	12.9	328	41.7	1059	13.8	351	19.7	500	493	306	85.0 548	27 21	
44X18-20NHS		Xtra Traction WL		15.00T	18.5	470	44.3	1125	19.6	498	20.3	516	470	292	200.0 1290	44 35	
46X12R20NHS		RL-5K (24/24) #	L-5	8.50-2.0	12.3	312	46.6	1184	13.7	348	20.8	528	451	280	165.0 1067	78 62	
46X15R20NHS		RL-5K #	L-5	11.00-2.0	14.8	376	46.6	1184	16.2	411	20.8	529	451	280	198.0 1277	78 62	
46X18R20NHS		RL-5K (24/24) #	L-5	13.00-2.0	16.8	427	46.6	1184	18.2	462	20.8	528	451	280	240.0 1548	78 62	
50X20-20NHS		Rock Mine Service		15.00T	19.5	495	49.4	1255	21.1	541	22.7	577	417	259	230.0 1484	33 26	
		XTR-3C	N	15.00T	20.2	513	50.2	1275			23.0	584	421	262	275.0 1774	32 25	
9.50-20NHS	*	SMO-5B	L-5S	L A	7.5	11.2	283	41.4	1052	12.2	310	19.1	485	498	309	105.0 677	72 57
12.00-24NHS	*	AMS-4/5A	L-4		8.50V	13.1	333	50.7	1288	14.8	376	23.6	599	402	250	121.0 781	55 43
		SMO-5B	L-5S		8.5	12.8	325	50.2	1275	14.8	376	23.6	599	402	250	121.0 781	83 66
	*	SMO-5B/C	L-5S	N L E	8.50V	12.8	325	50.2	1275	14.8	376	23.6	599	402	250	121.0 781	83 66
	*	UMS-3A		N E A	8.50V	12.8	325	49.5	1257	14.0	356	22.9	582	433	269	140.0 903	28 22
12.00R24NHS	*	RL-4J	E-4		8.5	13.3	338	50.3	1275	14.5	368	23.5	599	420	261	113.0 729	42 33

127

Sizes in bold type can be obtained in locations in bold.  
 Extended lead time may be needed in other locations.

## Legend

N = North America  
L = Latin AmericaE = Europe / Africa / Mid East  
A = Asia / Australia# = Estimated Data  
\* = Tube Type Tire

^ = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

		PSI KPA	95 660	100 690	105 720	110 760	115 790	120 830	125 860	130 900	135 930	140 970	145 1000	150 1030	▲	▲		
BIAS		LBS KG	<b>10500</b> 4765	<b>10800</b> 4900	<b>11100(16)</b> 5035(16)	<b>11500</b> 5215	<b>11800</b> 5350	<b>12100</b> 5490	<b>12300</b> 5580	<b>12600</b> 5715	<b>12900(20)</b> 5850(20)	<b>13200</b> 5985	<b>13500</b> 6125	<b>13700</b> 6215	<b>17000(32)</b> 7710(32)	<b>21600(48)</b> 9800(48)		
42X13-20NHS		PSI KPA	<b>95 660</b>	<b>100 690</b>	<b>105 720</b>	<b>110 760</b>	<b>115 790</b>	<b>120 830</b>	<b>125 860</b>	<b>130 900</b>	<b>135 930</b>	<b>140 970</b>	<b>145 1000</b>	<b>150 1030</b>	▲	▲	▲	
BIAS		LBS KG	<b>14300</b> 6485	<b>14700</b> 6670	<b>15200</b> 6895	<b>15600</b> 7075	<b>16000</b> 7260	<b>16400</b> 7440	<b>16800</b> 7620	<b>17200</b> 7800	<b>17600</b> 7985	<b>17900</b> 8120	<b>18300</b> 8300	<b>18700</b> 8480	<b>20100(32)</b> 9115(32)	<b>21500(36)</b> 9750(36)	<b>25500(48)</b> 11565(48)	
44X18-20NHS		PSI KPA	<b>105 725</b>	<b>109 750</b>	<b>112 775</b>	<b>116 800</b>	<b>120 825</b>	<b>123 850</b>	<b>127 875</b>	<b>131 900</b>	<b>134 925</b>	<b>138 950</b>	<b>141 975</b>	<b>145 1000</b>	<b>149 1025</b>	▲		
46X12R20NHS ( 12.00R20 )		LBS KG	<b>12300</b> 5600	<b>12800</b> 5800	<b>12800</b> 5800	<b>13200</b> 6000	<b>13600**</b> 6150**	<b>13900</b> 6300	<b>13900</b> 6300	<b>14300</b> 6500	<b>14800</b> 6700	<b>15200***</b> 6900***	<b>15200</b> 6900	<b>15700</b> 7100	<b>16100</b> 7300	<b>24100▲</b> 10930▲		
46X15R20NHS		LBS KG	<b>15200</b> 6900	<b>15700</b> 7100	<b>16100</b> 7300	<b>16100***</b> 7300***	<b>16500</b> 7500	<b>17100</b> 7750	<b>17600</b> 8000	<b>17600</b> 8000	<b>18200</b> 8250	<b>18700</b> 8500	<b>18700</b> 8500	<b>19300</b> 8750	<b>19800</b> 9000	<b>29700</b> 13500		
46X18R20NHS		LBS KG	<b>16100</b> 7300	<b>16500</b> 7500	<b>16500</b> 7500	<b>17100***</b> 7750***	<b>17600</b> 8000	<b>18200</b> 8250	<b>18200</b> 8250	<b>18700</b> 8500	<b>19300</b> 8750	<b>19800</b> 9000	<b>19800</b> 9000	<b>20400</b> 9250	<b>20900</b> 9500	<b>31700</b> 14400		
BIAS		PSI KPA	<b>95 660</b>	<b>100 690</b>	<b>105 720</b>	<b>110 760</b>	<b>115 790</b>	<b>120 830</b>	<b>125 860</b>	<b>130 900</b>	<b>135 930</b>	▲						
50X20-20NHS		LBS KG	<b>22500</b> 10200	<b>23200</b> 10500	<b>23900</b> 10800	<b>24500</b> 11100	<b>25200</b> 11400	<b>25800(28)</b> 11700(28)	<b>26400</b> 12000	<b>27100</b> 12300	<b>27700(32)</b> 12600(32)	<b>30000(36)▲</b> 13610(36)▲						
BIAS		PSI KPA	<b>69 475</b>	<b>73 500</b>	<b>76 525</b>	<b>80 550</b>	<b>83 575</b>	<b>87 600</b>	<b>91 625</b>	<b>94 650</b>	<b>98 675</b>	<b>102 700</b>	<b>105 725</b>	<b>109 750</b>	<b>112 775</b>	<b>116 800</b>	<b>120 825</b>	
12.00-24NHS		LBS KG	<b>11000</b> 5000	<b>11400</b> 5150	<b>11700</b> 5300	<b>12000</b> 5450	<b>12300</b> 5600	<b>12300</b> 5600	<b>12800</b> 5800	<b>13200</b> 6000	<b>13600(16)</b> 6150(16)	<b>13600</b> 6150	<b>13900</b> 6300	<b>14300▲</b> 6500▲	<b>14800▲</b> 6700▲	<b>14800▲</b> 6700▲	<b>15200(20)▲</b> 6900(20)▲	

Legend

▲ Permafoam inflation or special rim required

## MINE SERVICE

## RADIAL



## BIAS



## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi	Gross Contact Area in2 cm2	Tread Depth 1/32 in mm	
					Overall Width in mm	Overall Diameter in mm	Load Sect & Growth in mm	Static Load Rad in mm								
14.00-24NHS	SMO-5B	L-5S	L E A	10.00W	15.3	389	55.6	1412	17.0	432	25.9	658	367	228	177.0 1142	96 76
	SMO-5B SA	L-5S		10.00W	14.3	363	53.4	1356	15.9	404	25.2	640	384.9	239.1	194.0 1252	82 65.2
	* SMO-5B/C	L-5S		10.00W	15.3	389	55.6	1412	17.0	432	25.4	645	373	232	177.0 1142	96 76
	* UMS-3A			10.00W	14.6	371	52.7	1339	16.2	411	24.6	625	387	241	175.0 1125	33 26
	* WRL-3A	E-3		10.00W	14.6	371	52.7	1339	16.2	411	24.6	625	387	241	175.0 1125	33 26
	WRL-3A	E-3		10.00VA	14.6	371	52.7	1339	16.2	411	24.6	625	387	241	175.0 1125	33 26
14.00R24NHS	* RL-4J	E-4	N	10.00W	15.3	389	55.6	1412	16.7	424	25.9	658	377	234	154.0 994	48 38
	RL-5K	L-5		10.00W	15.0	381	55.8	1417	16.2	411	26.0	660	362	225	190.0 1226	81 64
	RL-5K (08/08)	L-5		10.00W	15.0	381	55.8	1417	16.2	411	26.0	660	362	225	190.0 1226	81 64
	RL-5K (12/12)	L-5		10.00W	15.0	381	55.8	1417	16.2	411	26.0	660	362	225	190.0 1226	81 64
	RL-5K (24/24)	L-5		10.00W	15.0	381	55.8	1417	16.2	411	26.0	660	362	225	190.0 1226	81 64
14.00R25NHS	RL-4J	E-4	N A	10.00	15.3	389	55.6	1412	16.7	424	25.9	658	377	234	154.0 994	48 38
16.00-25	AMS-4/5A	L-4		11.25-2.0	17.4	442	59.9	1521	19.4	493	27.6	701	343	213	200.0 1290	66 52
17.5-25	AMS D/L-4/15C	L-4	N	14.00-1.5	17.5	445	55.1	1400	20.0	508	24.1	612	395	245	250.0 1613	75 59
	AMS D/L-5/15C	L-5		14.00-1.5	17.5	445	55.1	1400	20.0	508	24.1	612	395	245	250.0 1613	104 82
	SMO D/L-5B	L-5S		14.00-1.5	17.5	445	55.1	1400	20.0	508	25.4	644	376	234	170.0 1097	104 59
	SMO D/L-5C	L-5S		14.00-1.5	17.5	445	55.1	1400	20.0	508	24.1	612	395	245	250.0 1613	87 69
	UMS D/L-3A	L-3		14.00-1.5	17.7	450	53.3	1354	19.5	496	23.5	597	404	251	260.0 1677	35 28
	UMS-3A			14.00-1.5	18.0	457	53.5	1359	19.9	505	23.5	597	391	243	322.0 2080	35 28

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

		PSI KPA	95 660	100 690	105 720	110 760	115 790	120 830	125 860	130 900	135 930		
BIAS	LBS	<b>18200</b>	<b>18700(20)</b>	<b>19300</b>	<b>19800</b>	<b>20400</b>	<b>20900(24)</b>	<b>20900</b>	<b>21500</b>	<b>22000(28)</b>			
	KG	8250	8500(20)	8750	9000	9250	9500(24)	9500	9750	10000(28)			
RADIAL	PSI KPA	<b>105 725</b>	<b>109 750</b>	<b>112 775</b>	<b>116 800</b>	<b>120 825</b>	<b>123 850</b>	<b>127 875</b>	<b>131 900</b>				
	LBS	<b>18700</b>	<b>19300</b>	<b>19800</b>	<b>20400</b>	<b>20900**</b>	<b>21500</b>	<b>21500</b>	<b>22000***▲</b>				
BIAS	KG	8500	8750	9000	9250	9500**	9750	9750	10000***▲				
	PSI KPA	<b>69 475</b>	<b>73 500</b>	<b>76 525</b>	<b>80 550</b>	<b>83 575</b>	<b>87 600</b>	<b>91 625</b>	<b>94 650</b>	<b>98 675</b>	<b>102 700</b>	<b>105 725</b>	<b>109 750</b>
16.00-25	LBS	<b>19300</b>	<b>19800</b>	<b>20400</b>	<b>21500(20)</b>	<b>22000</b>	<b>22000</b>	<b>22700</b>	<b>23400(24)</b>	<b>24000</b>	<b>24700</b>	<b>24700</b>	<b>25400(28)</b>
	KG	8750	9000	9250	9750(20)	10000	10000	10300	10600(24)	10900	11200	11200	11500(28)
BIAS	PSI KPA	<b>62 425</b>	<b>65 450</b>	<b>69 475</b>	<b>73 500</b>	<b>76 525</b>	<b>80 550</b>	<b>83 575</b>	<b>87 600</b>	<b>91 625</b>	<b>94 650</b>	<b>98 675</b>	<b>102 700</b>
	KPA												<b>105 725</b>
17.5-25	LBS	<b>15200(16)</b>	<b>15700</b>	<b>16100</b>	<b>16500</b>	<b>17100</b>	<b>17600(20)</b>	<b>18200</b>	<b>18700</b>	<b>18700</b>	<b>19300</b>	<b>19800</b>	<b>20400</b>
	KG	6900(16)	7100	7300	7500	7750	8000(20)	8250	8500	8500	8750	9000	9250
	PSI KPA	<b>116 800</b>											<b>109 750</b>
	LBS	<b>22000(28)</b>											<b>112 775</b>
	KG	10000(28)											Continued

130

Legend

▲ Permafoam inflation or special rim required

## MINE SERVICE

### RADIAL



RL-5K (12/12)

RL-4K



RL-5K (08/08)

SM-3A



### DIMENSIONAL DATA

### BIAS



SMO-5E

SMO-5C

SMO-5D

SMO-5A

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per mi	Gross Contact Area in2	Tread Depth 1/32 in	cm2 mm
					Overall Width in	Overall Diameter mm	Load Sect & Growth in	Static Load Rad mm				
17.5R25	RL-4K #	L-4	E	14.00-1.5	17.8	542	55.1	1400	19.6	499	24.6	624
	RL-5K	L-5		14.00-1.5	17.8	452	56.2	1427	20.2	513	24.6	624
	RL-5K (08/08)	L-5		14.00-1.5	17.8	452	55.1	1400	20.2	513	24.6	624
	RL-5K (12/12)	L-5		14.00-1.5	17.8	452	55.1	1400	20.2	513	24.6	624
	RL-5S	L-5S		14.00-1.5	18.1	460	55.2	1401	19.7	500	24.6	624
18.00-25	AMS-4/5A	L-4	N L A	13.00-2.5	20.1	511	66.3	1684	23.0	584	30.2	767
	SMO-5C	L-5S		13.00-2.5	20.4	518	65.4	1661	22.8	580	30.1	765
	SMO-5D	L-5S		13.00-2.5	20.6	523	65.6	1666	22.2	564	30.2	767
	SMO-5E	L-5S		13.00-2.5	21.5	546	64.7	1643	22.1	561	28.9	734
18.00R25	RL-5S	L-5S	N E	13.00-2.5	20.2	513	65.8	1671	21.9	557	30.6	776
	SM-5A	L-5S	N L E A	13.00-2.5	20.2	513	65.8	1671	21.9	557	30.6	776
20.5R25	RL-5S	L-5S	E	17.00-2.0								
	SM-3A	L-3S	17.00-2.0	21.4	544	58.9	1495	23.8	605	26.3	668	
21.00-25	SMO-5A	L-5S	N	15.00-3.0	22.8	579	69.0	1753	24.8	630	31.9	810
	SMO-5C	L-5S	A	15.00-3.0	22.8	579	69.0	1753	24.8	630	31.9	810
23.5R25	RL-5S	L-5S	E	19.5-2.5	24.5	623	65.1	1654	27.3	694	29.4	747
	SM-3A	L-3S	N A	19.5-2.5	24.0	610	64.1	1628	27.2	691	28.4	722
23/90-25	SMO-5C	L-5S		15.00-2.5	22.8	579	65.5	1664	24.8	630	30.2	767

131

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

#### Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

# LOAD LIMITS AT COLD INFLATION PRESSURES

## 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
RADIAL	LBS KG	8050 3650	8800 4000	9350 4250	10200 4625	10700 4850	11700 5300	12300 5600	12800 5800	13200 6000	13600 6150	14300 6500	14800 6700	15700* 7100*	16100 7300	16500 7500	
17.5R25	PSI KPA	83 575	87 600	91 625	94 650	116 800											
	LBS KG	17100 7750	17600 8000	18200 8250	18700** 8500**	22000*** 10000***											
BIAS	PSI KPA	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750				
18.00-25	LBS KG	25400(20) 11500(20)	26000 11800	26800 12150	27600(24) 12500(24)	28300 12850	29100 13200	30000 13600	30000(28) 13600(28)	30900 14000	32000 14500	32000 14500	33100(32) 15000(32)				
RADIAL	PSI KPA	76 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825	131 900		
18.00R25	LBS KG	24700 11200	26000* 11800*	26800 12150	27600 12500	28300 12850	29100 13200	30000 13600	30900 14000	32000 14500	33100 15000	33100 15000	34200 15500	35300** 16000**	37500*** 17000***		
RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
20.5R25	LBS KG	10500 4750	11400 5150	12300 5600	13200 6000	13900 6300	14800 6700	15700 7100	16500 7500	17600 8000	18200 8250	19300 8750	19800 9000	20900* 9500*	21500 9750	22000 10000	
	PSI KPA	83 575	87 600	91 625	94 650												
	LBS KG	22700 10300	24000 10900	24700 11200	25400** 11500**												
BIAS	PSI KPA	73 500	78 525	80 550	83 575	87 600	91 625	94 650	98 675	102 700	105 725	109 750	112 775	116 800	120 825		
21.00-25	LBS KG	33100(24) 15000(24)	34200 15500	35300 16000	36400(28) 16500(28)	37500 17000	37500 17000	38600(32) 17500(32)	39700 18000	40800 18500	41900(36) 19000(36)	43000 19500	43000 19500	44100 20000	45400(40) 20600(40)		
RADIAL	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	Continued
23.5R25	LBS KG	13200 6000	14300 6500	15700 7100	17100 7750	18200 8250	19300 8750	20400 9250	21500 9750	22700 10300	23400 10600	24700 11200	25400 11500	26800* 12150*	27600 12500	28300 12850	
	PSI KPA	83 575	87 600	91 625	94 650												
	LBS KG	29100 13200	30000 13600	30900 14000	32000** 14500**												
BIAS	PSI KPA	73 500	78 525	80 550	83 575	87 600	91 625	94 650	98 675								
23/90-25	LBS KG	29100 13200	30000 13600	30900 14000	32000(30) 14500(30)	32000 14500	33100 15000	34200 15500	35300(36) 16000(36)								

132

Legend

▲ Permafoam inflation or special rim required

## MINE SERVICE

## RADIAL



RL-5K (12/12)



RL-4D



RL-4K (24/24)



RL-5K (24/24)



RL-5S



RL-5K (03/03)



RL-5K (08/08)



SM-5A



SHRL XT D/L



SMO-5C



SMO D/L-4A



SMO D/L-5A



SMO D/L-5C

SMO D/L-5D

## DIMENSIONAL DATA

## BIAS

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS		LOADED DIMENSIONS		Revol Per km	Gross Contact Area in2	Tread Depth 1/32 in	
					Overall Width mm	Overall Diameter mm	Load Sect & Growth mm	Static Load Rad mm				
26.5-25	SMO D/L-5C	L-5S	N A	22.00-3.0	27.4	696	71.0	1803	29.9	759	33.0	838
	SMO D/L-5D	L-5S		22.00-3.0	27.4	696	71.0	1803	29.9	759	33.0	838
	SMO D/L-5E	L-5S		22.00-3.0	25.2	640	70.4	1788	27.5	699	31.8	808
26.5R25	RL-5K (03/03)	L-5	N	22.00-3.0	27.7	703	70.2	1783	30.8	782	31.6	803
	RL-5K (08/08)	L-5		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803
	RL-5K (12/12)	L-5		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803
	RL-5S #	L-5S	N E A	22.00-3.0	27.9	709	70.5	1791	31.3	795	31.6	803
	SM-5A	L-5S		22.0-3.0	27.7	703	70.2	1783	30.8	782	31.6	803
29.5-25	SMO D/L-5A	L-5S	N	25.00-3.5	30.8	782	74.4	1890	34.2	869	34.2	869
29.5R25	RL-5S	L-5S	N E	25.00-3.5	31.7	805	75.6	1920	34.9	887	33.9	861
29.5-29	AMS D/L-5/8H	L-5		25.00-3.5	29.9	759	78.8	2002	32.5	826	36.8	935
	SHRL XT D/L	L-4		25.00-3.5	30.8	782	78.7	1999	34.1	866	35.6	904
	SMO D/L-4A	L-4S		25.00-3.5	31.3	795	78.2	1986	34.9	886	35.7	907
	SMO D/L-5A	L-5S	A	25.00-3.5	30.1	765	78.9	2004	33.0	838	36.3	922
	SMO D/L-5C	L-5S		25.00-3.5	30.1	765	78.9	2004	33.0	838	36.3	922
	SMO-5C	L-5S		25.00-3.5	30.1	765	78.9	2004	33.0	838	36.3	922
	RL-4K (24/24)	L-4	N A	25.00-3.5	30.7	779	79.7	2024	34.6	879	35.0	890
29.5R29	RL-5K (24/24)	L-5	N	25.00-3.5	30.1	764	79.7	2024	34.2	869	35.0	890
	RL-5S #	L-5S		25.00-3.5	30.1	764	79.7	2024	34.2	869	35.0	890
	RL-4D	L-4	N	27.00-3.0	33.9	860	74.0	1880	37.7	958	32.3	820
875/65R29									284	176	782.0	4698

133

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

	PSI KPA	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625		
BIAS 26.5-25	LBS KG	29100(20) 13200(20)	30000 13600	30900(24) 14000(24)	32000 14500	33100(26) 15000(26)	34200(28) 15500(28)	35300 16000	36400 16500	37500(32) 17000(32)	38600(34) 17500(34)	39700 18000	40800(36) 18500(36)		
	PSI KPA	29 200	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	
RADIAL 26.5R25	LBS KG	16500 7500	18200 8250	19800 9000	20900 9500	22700 10300	24000 10900	25400 11500	26800 12150	28300 12850	29100 13200	30900 14000	32000 14500	33100* 15000*	
	PSI KPA	83 575	87 600	91 625	94 650	116 800								34200 15500	35300 16000
BIAS 29.5-25	LBS KG	36400 16500	37500 17000	39700 18000	40800** 18500**	46700*** 21800***									
	PSI KPA	33 225	36 250	40 275	44 300	47 325	51 350	54 375	58 400	62 425	65 450	69 475	73 500	76 525	
RADIAL 29.5R29	LBS KG	26800 12150	28300(16) 12850(16)	30000 13600	32000 14500	33100(22) 15000(22)	35300 16000	36400 16500	37500 17000	38600(28) 17500(28)	40800 18500	41900 19000	43000 19500	44100(34) 20000(34)	
	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650	116 800		
RADIAL 875/65R29	LBS KG	36400 16500	37500 17000	39700 18000	40800 18500	43000* 19500*	44100 20000	45400 20600	46700 21200	49400 22400	50700 23000	52000** 23600**	60000*** 27250***		
	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625				
875/65R29	LBS KG	40800 18500	43000 19500	44100 20000	46700* 21200*	48100 21800	49400 22400	52000 23600	53600 24300	55100 25000	56800** 25750**				

134

Legend

▲ Permafoam inflation or special rim required

## MINE SERVICE

## RADIAL



## DIMENSIONAL DATA

Size	Type	Ind Code	Current In Line Location	Rim Width & Flange	INFLATED DIMENSIONS				LOADED DIMENSIONS				Revol Per mi	Gross Contact Area in2	Tread Depth 1/32 in	
					Overall Width in	Overall Diameter mm	Load Sect & Growth in	Static Load Rad mm								
35/65R33 (875/65R33)	RL-4K	L-4	N	28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	73 58
	RL-5K 05/10	L-5		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	120 95
	RL-5S	L-5S		28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	120 95
875/65R33	RL-5S	L-5S	N E	28.00-3.5	35.6	904	81.9	2079	38.7	982	36.9	937	257	159	686.0 4426	120 95

Sizes in bold type can be obtained in locations in bold.  
Extended lead time may be needed in other locations.

Legend

N = North America  
L = Latin America

E = Europe / Africa / Mid East  
A = Asia / Australia

# = Estimated Data  
\* = Tube Type Tire

<sup>^</sup> = Work Capability Factor

## LOAD LIMITS AT COLD INFLATION PRESSURES

### 5 MPH (10 KM/H) OFF-THE-ROAD UNDERGROUND MINE SERVICE

RADIAL	PSI KPA	58 400	62 425	65 450	69 475	73 500	76 525	80 550	83 575	87 600	91 625	94 650
875/65R33 (35/65R33)	LBS KG	43000 19500	45400 20600	46700 21200	49400 22400	50700* 23000*	52000 23600	55100 25000	56800 25750	58400 26500	60000 27250	61500** 28000**

Legend

▲ Permafoam inflation or special rim required

# DRIVE AWAY

**LOAD AND INFLATION TABLES: English**  
**CONVENTIONAL SIZE TIRES**  
**MAXIMUM SPEED - 30 MPH**  
**(MINIMUM INFLATION PRESSURE - 25 PSI)**

These loads and inflations are used for drive away only.  
 They cannot be used for jobsite roading.

**DANGER:** Operation of vehicles over the road, ignoring speed limitations and cooling requirements as noted below, can void tire warranty and induce premature tire failure!

Tire Size	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
12.00-20,21 NHS	2690	2990	3260	3540	3780	4020	4260	4480	4700	4900	5100	5300	5500	5680	5860	6050
12.00-24,25 NHS	3020	3360	3680	3980	4260	4540	4800	5040	5280	5520	5740	5960	6200	6400	6600	6800
13.00-24,25 NHS	3500	3880	4260	4600	4920	5240	5540	5820	6100	6400	6650	6900	7150	7400	7600	7850
14.00-20,21 NHS	3680	4100	4500	4860	5200	5540	5860	6150	6450	6750	7000	7300	7550	7800	8050	8300
14.00-24,25 NHS	4120	4580	5020	5420	5800	6200	6550	6850	7200	7500	7850	8150	8450	8700	9000	9250
16.00-21 NHS	4920	5460	5980	6450	6950	7350	7800	8200	8600	8950	9350	9700	10100	10400	10700	11100
16.00-25	5380	5980	6550	7100	7600	8050	8550	9000	9400	9850	10200	10600	11000	11400	11800	12100
18.00-25	6950	7750	8500	9150	9800	10400	11000	11600	12200	12700	13200	13700	14200	14700	15200	15700
18.00-33	8050	9000	9850	10600	11400	12100	12800	13500	14100	14700	15400	15900	16500	17100	17600	18200
18.00-49	10200	11400	12400	13400	14400	15300	16200	17000	17800	18600	19400	20200	20900	21600	22300	23000
21.00-25	8950	9950	10900	11800	12600	13400	14200	14900	15700	16400	17000	17700	18300	18900	19600	20200
21.00-35	10600	11800	12900	14000	15000	15900	16900	17700	18600	19400	20200	21000	21700	22500	23200	23900
21.00-49	12900	14300	15700	17000	18200	19300	20400	21500	22500	23500	24500	25400	26300	27200	28100	29000
24.00-25	11600	12900	14100	15200	16300	17400	18400	19300	20200	21100	22000	22900	23700	24500	25300	26000
24.00-29	12400	13800	15100	16300	17500	18600	19700	20700	21700	22600	23600	24500	25400	26200	27100	27900
24.00-35	13600	15100	16600	17900	19200	20400	21600	22700	23800	24800	25800	26800	27800	28800	29700	30600
24.00-43	15200	16900	18500	20000	21400	22700	24000	25300	26500	27700	28800	29900	31000	32100	33100	34100
24.00-49	16300	18100	19900	21500	23000	24500	25900	27200	28500	29800	31000	32200	33400	34500	35600	36700

BIAS - 30 MPH  
 ADD 10 PSI FOR RADIAL  
 English

For Service Notes – See next page.  
 Contact your Rim Supplier regarding information on Rim Strength.

# DRIVE AWAY

**LOAD AND INFLATION TABLES: English**  
**CONVENTIONAL SIZE TIRES**  
**MAXIMUM SPEED - 30 MPH**  
**(MINIMUM INFLATION PRESSURE - 25 PSI)**

These loads and inflations are used for drive away only.  
 They cannot be used for jobsite roading.

**DANGER:** Operation of vehicles over the road, ignoring speed limitations and cooling requirements as noted below, can void tire warranty and induce premature tire failure!

Tire Size	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
27.00-33	16200	18100	19800	21400	22900	24400	25800	27100	28400	29700	30900	32100	33200	34400	35500	36600
27.00-49	20000	22200	24300	36300	28200	30000	31700	33300	34900	36500	38000	39400	40900	42300	43600	44900
30.00-51	24700	27500	30100	32500	34900	37100	39200	41300	43200	45200	47000	48800	50600	52300	54000	55600
33.00-51	28600	31900	34900	37700	40400	43000	45400	47800	50100	52300	54500	56500	58600	60500	62500	64500
36.00-51	34900	38800	42500	45900	49200	52300	55300	58200	61000	63500	65500	69000	71500	74000	76000	78500
40.00-57	44500	49600	54200	58600	63000	67000	70500	74500	78000	81500	84500	88000	91000	94000	97500	100000

BIAS - 30 MPH  
 ADD 10 PSI FOR RADIAL  
 English

## Service Notes

- Regular Tread Tires
  - Maximum Highway Speeds: Conventional tires – 30 MPH, Wide Base Tires – 20 MPH.
  - Stop for 30 minute cooling period after each 50 miles of driving or 2 hours of sustained operation, whichever comes first.
  - One hour minimum stop should be observed after each 4 hours of operation.
  - Where Conventional and Wide Base tires are mixed on vehicle, use guidelines specified for Wide Base tires.
- Extra Skid Depth and Special Compound Tires
  - Vehicles equipped with extra skid depth tires are not to be driven in transit over the highway unless the proposed trip is reviewed and approved by the tire manufacturer.
- Instructions for Use of Drive-Away Table
  - Determine the load each tire will carry.
  - Using the table, select the inflation pressure shown for the tire load determined. This is the pressure required for drive-away service.
  - Tire ply rating is ignored when determining drive-away load and pressure conditions.

Contact your Rim Supplier regarding information on Rim Strength.

# DRIVE AWAY

**LOAD AND INFLATION TABLES: English**  
**WIDE BASE SIZE TIRES**  
**MAXIMUM SPEED - 20 MPH**  
**(MINIMUM INFLATION PRESSURE - 26 PSI)**

These loads and inflations are used for drive away only.  
 They cannot be used for jobsite roading.

**DANGER:** Operation of vehicles over the road, ignoring speed limitations and cooling requirements as noted below, can void tire warranty and induce premature tire failure!

Tire Size	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
15.5-25	3740	4160	4540	4920	5260	5600	5920	6250	6550	6800	7100	7400	7650	7900	8150	8400
17.5-25	4460	4960	5440	5880	6300	6700	7100	7450	7800	8150	8500	8800	9150	9450	9750	10000
20.5-25	5960	6650	7250	7850	8400	8950	9450	9950	10400	10900	11300	11800	12200	12600	13000	13400
23.5-25	7600	8450	9250	10000	10700	11400	12100	12700	13300	13900	14500	15000	15600	16100	16600	17100
26.5-25	9550	10600	11600	12600	13500	14300	15200	16000	16700	17500	18200	18900	19600	20200	20900	21500
26.5-29	10200	11400	12400	13400	14400	15300	16200	17000	17900	18700	19400	20200	20900	21600	22300	23000
29.5-25	11500	12800	14000	15200	16300	17300	18300	19200	20200	21000	21900	22800	23600	24400	25200	25900
29.5-29	12300	13700	14900	16200	17300	18400	19500	20500	21500	22400	23300	24200	25100	26000	26800	27600
29.5-35	13400	14900	16300	17600	18800	20000	21200	22300	23400	24400	25400	26400	27300	28300	29200	30100
33.25-29	15100	16800	18400	19900	21300	22700	24000	25200	26500	27600	28800	29900	30900	32000	33000	34000
33.25-35	16400	18200	20000	21600	23100	24600	26000	27400	28700	29900	31200	32400	33500	34700	35800	36900
33.5-33	16500	18400	20100	21700	23300	24800	26200	27500	28900	30100	31400	32600	33800	34900	36000	37100
33.5-39	17800	19800	21600	23400	25100	26700	28200	29700	31100	32500	33800	35100	36400	37600	38800	40000
37.25-35	19800	22000	24100	26000	27900	29600	31300	33000	34500	36100	37600	39000	40400	41800	43100	44400
37.5-33	19800	22100	24200	26100	28000	29800	31500	33100	34700	36200	37700	39200	40600	42000	43300	44700
37.5-39	21300	23700	25900	28000	30000	32000	33800	35600	37300	38900	40500	42100	43600	45100	46500	47900
37.5-51	24100	26800	29300	31700	34000	36100	38200	40200	41200	44000	45800	47600	49300	51000	52600	54200

BIAS - 20 MPH  
 ADD 10 PSI FOR RADIAL  
 English

#### Service Notes

- Regular Tread Tires
  - Maximum Highway Speeds: Conventional tires – 30 MPH, Wide Base Tires – 20 MPH.
  - Stop for 30 minute cooling period after each 50 miles of driving or 2 hours of sustained operation, whichever comes first.
  - One hour minimum stop should be observed after each 4 hours of operation.
  - Where Conventional and Wide Base tires are mixed on vehicle, use guidelines specified for Wide Base tires.
- Extra Skid Depth and Special Compound Tires
  - Vehicles equipped with extra skid depth tires are not to be driven in transit over the highway unless the proposed trip is reviewed and approved by the tire manufacturer.
- Instructions for Use of Drive-Away Table
  - Determine the load each tire will carry.
  - Using the table, select the inflation pressure shown for the tire load determined. This is the pressure required for drive-away service.
  - Tire ply rating is ignored when determining drive-away load and pressure conditions.

Contact your Rim Supplier regarding information on Rim Strength.

# DRIVE AWAY

## LOAD AND INFLATION TABLES: Metric

### CONVENTIONAL SIZE TIRES

**MAXIMUM SPEED - 50 KPH**

**(MINIMUM INFLATION PRESSURE - 1.75 BAR**

These loads and inflations are used for drive away only.

They cannot be used for jobsite roading.

**DANGER:** Operation of vehicles over the road, ignoring speed limitations and cooling requirements as noted below, can void tire warranty and induce premature tire failure!

### TIRE LOAD LIMITS (KILOGRAMS) AT VARIOUS COLD INFLATION PRESSURES - BAR

Tire Size	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00
12.00-20,21 NHS	1215	1320	1400	1500	1600	1700	1750	1850	1900	2000	2060	2120	2180	2300	2360	2430	2430	2500	2575	2650	2725	2800
12.00-24,25 NHS	1400	1500	1600	1700	1800	1900	2000	2060	2180	2240	2300	2430	2500	2575	2650	2725	2800	2800	2900	3000	3075	3075
13.00-24,25 NHS	1600	1750	1850	2000	2060	2180	2300	2430	2500	2575	2750	2800	2900	3000	3075	3150	3250	3250	3250	3350	3450	3550
14.00-20,21 NHS	1700	1850	1950	2060	2180	2300	2430	2575	2650	2725	2800	2900	3000	3150	3250	3350	3350	3450	3550	3650	3750	3750
14.00-24,25 NHS	1900	2060	2180	2300	2430	2575	2725	2800	3000	3075	3150	3250	3350	3450	3550	3650	3750	3750	3875	4000	4125	4125
16.00-21 NHS	2240	2430	2575	2800	2900	3075	3250	3350	3550	3650	3750	3875	4000	4125	4250	4375	4500	4625	4750	4875	5000	5000
16.00-25	2430	2650	2900	3000	3250	3350	3550	3650	3875	4000	4125	4250	4375	4500	4625	4875	5000	5000	5150	5300	5450	5600
18.00-25	3150	3450	3650	3875	4125	4375	4625	4750	5000	5150	5300	5600	5800	5800	6000	6300	6300	6500	6700	6900	7100	7100
18.00-33	3650	4000	4250	4500	4875	5000	5300	5600	5800	6000	6150	6500	6700	6900	7100	7300	7500	7500	7750	8000	8250	8250
18.00-49	4625	5000	5450	5800	6150	6500	6700	7100	7300	7500	7750	8000	8500	8750	9000	9250	9500	9500	9750	10000	10300	10600
21.00-25	4125	4375	4750	5000	5300	5600	5800	6150	6300	6700	6900	7100	7300	7500	7750	8000	8250	8500	8500	8750	9000	9250
21.00-35	4875	5300	5600	6000	6300	6700	6900	7300	7500	7750	8250	8500	8750	9000	9250	9500	9750	10000	10300	10600	10600	10900
21.00-49	5800	6300	6900	7300	7750	8000	8500	8750	9250	9500	10000	10300	10600	10900	11200	11500	11800	12150	12500	12500	12850	13200
24.00-25	5300	5800	6150	6500	6900	7300	7500	8000	8250	8500	9000	9250	9500	9750	10000	10300	10600	10900	11200	11500	11800	11800
24.00-29	5600	6150	6500	6900	7300	7750	8250	8500	8750	9250	9500	9750	10300	10600	10900	11200	11500	11800	12150	12500	12850	13200
24.00-35	6150	6700	7300	7750	8000	8500	9000	9250	9750	10000	10600	10900	11200	11500	11800	12150	12500	12850	13200	13600	13600	14000
24.00-43	6900	7500	8000	8500	9000	9500	10000	10300	10900	11200	11800	12150	12500	12850	13200	13600	14000	14500	14500	15000	15500	15500
24.00-49	7500	8000	8750	9250	9750	10300	10600	11200	11800	12150	12500	12850	13200	13600	14000	14500	15000	15500	16000	16500	17000	

BIAS - 50 KPH

ADD 0.75 BAR FOR RADIAL

Metric

For Service Notes – See next page.

Contact your Rim Supplier regarding information on Rim Strength.

# DRIVE AWAY

## LOAD AND INFLATION TABLES: Metric

### CONVENTIONAL SIZE TIRES

**MAXIMUM SPEED - 50 KPH**

**(MINIMUM INFLATION PRESSURE - 1.75 BAR**

These loads and inflations are used for drive away only.

They cannot be used for jobsite roading.

**DANGER:** Operation of vehicles over the road, ignoring speed limitations and cooling requirements as noted below, can void tire warranty and induce premature tire failure!

### TIRE LOAD LIMITS (KILOGRAMS) AT VARIOUS COLD INFLATION PRESSURES - BAR

Tire Size	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00
27.00-33	7500	8000	8500	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600	14000	14500	15000	15500	15500	16000	16500	16500
27.00-49	9250	10000	10600	11200	11800	12500	13200	13600	14500	15000	15500	16000	16500	17000	17500	18000	18500	19000	19500	19500	20000	20600
30.00-51	11200	12150	13200	14000	14500	15500	16000	17000	17500	18500	19000	19500	20000	21200	21800	22400	22400	23000	23600	24300	25000	25750
33.00-51	13200	14000	15000	16000	17000	18000	19000	19500	20600	21200	21800	23000	23600	24300	25000	25750	26500	27250	27250	28000	29000	29000
36.00-51	16000	17500	18500	19500	20600	21800	23000	23600	25000	25750	26500	28000	29000	29000	30000	31500	32500	32500	33500	34500	35500	35500
40.00-57	20600	21800	23600	25000	26500	28000	29000	30750	31500	33500	34500	35500	36500	37500	38750	40000	41250	41250	42500	43750	45000	46250

BIAS - 50 KPH

ADD 0.75 BAR FOR RADIAL

Metric

### Service Notes

- Regular Tread Tires
  - Maximum Highway Speeds: Conventional tires – 50 KPH, Wide Base Tires – 30 KPH.
  - Stop for 30 minute cooling period after each 50 miles of driving or 2 hours of sustained operation, whichever comes first.
  - One hour minimum stop should be observed after each 4 hours of operation.
  - Where Conventional and Wide Base tires are mixed on vehicle, use guidelines specified for Wide Base tires.
- Extra Skid Depth and Special Compound Tires
  - Vehicles equipped with extra skid depth tires are not to be driven in transit over the highway unless the proposed trip is reviewed and approved by the tire manufacturer.
- Instructions for Use of Drive-Away Table
  - Determine the load each tire will carry.
  - Using the table, select the inflation pressure shown for the tire load determined. This is the pressure required for drive-away service.
  - Tire ply rating is ignored when determining drive-away load and pressure conditions.

Contact your Rim Supplier regarding information on Rim Strength.

# DRIVE AWAY

## LOAD AND INFLATION TABLES: Metric

**WIDE BASE SIZE TIRES**

**MAXIMUM SPEED - 32 KPH**

**(MINIMUM INFLATION PRESSURE - 1.75 BAR**

These loads and inflations are used for drive away only.

They cannot be used for jobsite roading.

**DANGER:** Operation of vehicles over the road, ignoring speed limitations and cooling requirements as noted below, can void tire warranty and induce premature tire failure!

### TIRE LOAD LIMITS (KILOGRAMS) AT VARIOUS COLD INFLATION PRESSURES - BAR

Tire Size	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00
15.5-25	1700	1850	2000	2120	2240	2360	2430	2575	2650	2800	2900	3000	3075	3150	3250	3350	3450	3550	3650	3650	3750	3875
17.5-25	2060	2180	2360	2500	2650	2800	2900	3075	3150	3350	3450	3550	3650	3750	3875	4000	4125	4250	4250	4375	4500	4625
20.5-25	2725	3000	3150	3350	3550	3750	3875	4125	4250	4375	4625	4750	4875	5000	5150	5300	5450	5600	5800	5800	6000	6150
23.5-25	3450	3750	4000	4250	4500	4750	5000	5300	5450	5600	5800	6000	6300	6500	6700	6900	6900	7100	7300	7500	7750	7750
26.5-25	4375	4750	5000	5450	5600	6000	6300	6500	6900	7100	7300	7500	7750	8000	8250	8500	8750	9000	9250	9500	9750	9750
26.5-29	4625	5000	5450	5800	6150	6500	6700	7100	7300	7500	7750	8000	8500	8750	9000	9250	9250	9500	9750	10000	10300	10600
29.5-25	5300	5800	6150	6500	6900	7300	7500	8000	8250	8500	8750	9250	9500	9750	10000	10300	10600	10900	11200	11500	11500	11800
29.5-29	5600	6000	6500	6900	7300	7750	8000	8500	8750	9000	9500	9750	10000	10300	10600	10900	11200	11500	11800	12150	12500	12500
29.5-35	6150	6700	7100	7500	8000	8500	8750	9250	9500	10000	10300	10600	10900	11200	11500	11800	12150	12500	12850	13200	13600	13600
33.25-29	6900	7500	8000	8500	9000	9500	10000	10300	10900	11200	11500	12150	12500	12850	13200	13600	14000	14000	14500	15000	15000	15500
33.25-35	7500	8000	8750	9250	9750	10300	10900	11200	11800	12150	12500	13200	13600	14000	14500	14500	15000	15500	16000	16500	17000	17000
33.5-33	7500	8250	8750	9250	9750	10300	10900	11200	11800	12150	12850	13200	13600	14000	15000	14500	15000	15500	16000	16500	16500	17000
33.5-39	8250	8750	9500	10000	10600	11200	11800	12150	12850	13200	13600	14000	14500	15000	15500	16000	16500	16500	17000	17500	18000	18500
37.25-35	9000	9750	10600	11200	11800	12500	12850	13600	14000	14500	15000	15500	16000	17000	17000	17500	18000	18500	19000	19500	20000	20600
37.5-33	9000	9750	10600	11200	11800	12500	13200	13600	14000	14500	15000	16000	16500	16500	17000	17500	18000	18500	19000	19500	20000	20600
37.5-39	9750	10600	11200	12150	12850	13200	14000	14500	15000	16000	16500	17000	17500	18000	18500	19000	19500	20000	20600	21200	21200	21800
37.5-51	10900	11800	12850	13600	14500	15000	16000	16500	17000	18000	18500	19000	20000	20600	21200	21800	22400	23000	23600	24300	25000	

**BIAS - 32 KPH**

**ADD 0.75 BAR FOR RADIAL**

**Metric**

### Service Notes

- Regular Tread Tires
  - Maximum Highway Speeds: Conventional tires – 50 KPH, Wide Base Tires – 32 KPH.
  - Stop for 30 minute cooling period after each 80 miles of driving or 2 hours of sustained operation, whichever comes first.
  - One hour minimum stop should be observed after each 4 hours of operation.
  - Where Conventional and Wide Base tires are mixed on vehicle, use guidelines specified for Wide Base tires.
- Extra Skid Depth and Special Compound Tires
  - Vehicles equipped with extra skid depth tires are not to be driven in transit over the highway unless the proposed trip is reviewed and approved by the tire manufacturer.
- Instructions for Use of Drive-Away Table
  - Determine the load each tire will carry.
  - Using the table, select the inflation pressure shown for the tire load determined. This is the pressure required for drive-away service.
  - Tire ply rating is ignored when determining drive-away load and pressure conditions.

Contact your Rim Supplier regarding information on Rim Strength.

# LOAD INDEX SPEED SYMBOL MARKINGS

SPEED SYMBOL	SPEED	
	KMH	MPH
A1	5	2.5
A2	10	5
A3	15	10
A4	20	12.5
A5	25	15
A6	30	20
A7	35	22.5
A8	40	25
B	50	30
C	60	35
D	65	40
E	70	43
F	80	50
G	90	55
J	100	62

## SPEED SYMBOL

A symbol indicating the speed at which the tire can carry a load corresponding to its Load Index under specified service conditions.

## LOAD INDEX

A numerical code associated with the maximum load a tire can carry at the speed indicated by its Speed Symbol under specified service conditions.

## SERVICE DESCRIPTION

A service designation which is distinct from size designation, consisting of the Load Index and Speed Symbol.

EXAMPLE - 525/80R25 179E

## LOAD INDEX - KILOGRAM LOADS, AND TRA EQUIVALENT POUND LOADS

LI	kg	lbs.	LI	kg	lbs.	LI	kg	lbs.	LI	kg	lbs.
0	45	99	40	140	310	80	450	990	120	1400	3080
1	46.2	102	41	145	320	81	462	1020	121	1450	3200
2	47.5	105	42	150	330	82	475	1050	122	1500	3300
3	48.7	107	43	155	340	83	487	1070	123	1550	3420
4	50	110	44	160	355	84	500	1100	124	1600	3520
5	51.5	114	45	165	365	85	515	1140	125	1650	3640
6	53	117	46	170	375	86	530	1170	126	1700	3740
7	54.5	120	47	175	385	87	545	1200	127	1750	3860
8	56	123	48	180	395	88	560	1230	128	1800	3960
9	58	128	49	185	410	89	580	1280	129	1850	4080
10	60	132	50	190	420	90	600	1320	130	1900	4180
11	61.5	136	51	195	430	91	615	1360	131	1950	4300
12	63	139	52	200	440	92	630	1390	132	2000	4400
13	65	143	53	206	455	93	650	1430	133	2060	4540
14	67	148	54	212	465	94	670	1480	134	2120	4680
15	69	152	55	218	480	95	690	1520	135	2180	4800
16	71	157	56	224	495	96	710	1570	136	2240	4940
17	73	161	57	230	505	97	730	1610	137	2300	5080
18	75	165	58	236	520	98	750	1650	138	2360	5200
19	77.5	170	59	243	535	99	775	1710	139	2430	5360
20	80	175	60	250	550	100	800	1760	140	2500	5520
21	82.5	180	61	257	565	101	825	1820	141	2575	5680
22	85	185	62	265	585	102	850	1870	142	2650	5840
23	87.5	195	63	272	600	103	875	1930	143	2725	6000
24	90	200	64	280	615	104	900	1980	144	2800	6150
25	92.5	205	65	290	640	105	925	2040	145	2900	6400
26	95	210	66	300	660	106	950	2090	146	3000	6600
27	97.5	215	67	307	675	107	975	2150	147	3075	6800
28	100	220	68	315	695	108	1000	2200	148	3150	6950
29	103	225	69	325	715	109	1030	2270	149	3250	7150
30	106	235	70	335	740	110	1060	2340	150	3350	7400
31	109	240	71	345	760	111	1090	2400	151	3450	7600
32	112	245	72	355	785	112	1120	2470	152	3550	7850
33	115	255	73	365	805	113	1150	2540	153	3650	8050
34	118	260	74	375	825	114	1180	2600	154	3750	8250
35	121	265	75	387	855	115	1215	2680	155	3875	8550
36	125	275	76	400	880	116	1250	2760	156	4000	8800
37	128	280	77	412	910	117	1285	2830	157	4125	9100
38	132	290	78	425	935	118	1320	2910	158	4250	9350
39	136	300	79	437	965	119	1360	3000	159	4375	9650

## LOAD INDEX - KILOGRAM LOADS, AND TRA EQUIVALENT POUND LOADS

LI	kg	lbs.	LI	kg	lbs.	LI	kg	lbs.	LI	kg	lbs.
160	4500	9900	192	11200	24700	224	28000	61500	256	71000	156500
161	4625	10200	193	11500	25400	225	29000	64000	257	73000	161000
162	4750	10500	194	11800	26000	226	30000	66000	258	75000	165500
163	4875	10700	195	12150	26800	227	30750	68000	259	77500	171000
164	5000	11000	196	12500	27600	228	31500	69500	260	80000	176500
165	5150	11400	197	12850	28300	229	32500	71500	261	82500	182000
166	5300	11700	198	13200	29100	230	33500	74000	262	85000	187500
167	5450	12000	199	13600	30000	231	34500	76000	263	87500	193000
168	5600	12300	200	14000	30900	232	35500	78500	264	90000	198500
169	5800	12800	201	14500	32000	233	36500	80500	265	92500	204000
170	6000	13200	202	15000	33100	234	37500	82500	266	95000	209500
171	6150	13600	203	15500	34200	235	38750	85500	267	97500	215000
172	6300	13900	204	16000	35300	236	40000	88000	268	100000	220500
173	6500	14300	205	16500	36400	237	41250	91000	269	103000	227000
174	6700	14800	206	17000	37500	238	42500	93500	270	106000	233500
175	6900	15200	207	17500	38600	239	43750	96500	271	109000	240500
176	7100	15700	208	18000	39700	240	45000	99000	272	112000	247000
177	7300	16100	209	18500	40800	241	46250	102000	273	115000	253500
178	7500	16500	210	19000	41900	242	47500	104500	274	118000	260000
179	7750	17100	211	19500	43000	243	48750	107500	275	121000	267000
180	8000	17600	212	20000	44100	244	50000	110000	276	125000	275500
181	8250	18200	213	20600	45400	245	51500	113500	277	128500	283500
182	8500	18700	214	21200	46700	246	53000	117000	278	132000	291000
183	8750	19300	215	21800	48100	247	54500	120000	279	136000	300000
184	9000	19800	216	22400	49400	248	56000	123500	280	140000	308500
185	9250	20400	217	23000	50700	249	58000	128000	281	145000	319500
186	9500	20900	218	23600	52000	250	60000	132500	282	150000	330500
187	9750	21500	219	24300	53600	251	61500	135500	283	155000	341500
188	10000	22000	220	25000	55100	252	63000	139000	284	160000	353000
189	10300	22700	221	25750	56800	253	65000	143500	285	165000	364000
190	10600	23400	222	26500	58400	254	67000	147500	286	170000	375000
191	10900	24000	223	27250	60000	255	69000	152000	287	175000	386000

# LOAD/SPEED VARIATIONS HIGHWAY

FOR EARTMOVER TIRES  
USED IN SUSTAINED HIGHWAY USE

## 1. T&RA STANDARD BASED UPON LOAD AT 90 KMH

Operating Speed		% Load Change
KMH	MPH	
30	20	+86%
40	25	+77%
50	30	+69%
60	35	+60%
70	43	+43%
80	50	+17%
90	55	No Change
100	62	-14%

## 2. ETRTO STANDARD BASED UPON RATED LOAD AT 70 KMH

Operating Speed		% Load Change
KMH	MPH	
30	20	+30%
40	25	+24%
50	30	+18%
60	35	+12%
70	43	No Change
80	50	-18%
90	55	-30%
100	62	-40%

These tables apply to AT-2A, MC-1A and metric sized GP-2B tire sizes only.

# LOAD/SPEED VARIATIONS OFF-THE-ROAD

## 1. EARTMOVER 40MPH (65 KPH) SERVICE

T&RA (English)		ETRTO (Metric)	
Aspect Ratio	% Change (from 30 MPH)	Aspect Ratio	% Change (from 50 KPH)
Bias Conventional	-15%	Bias Conventional	-15%
Bias Wide Base	-17%	Bias Wide Base	-17%
Radial	-12%	Radial	-12%

## 2. GRADER SERVICE

T&RA (English)		ETRTO (Metric)	
Max Speed	% Change (from 25 MPH)	Max Speed	% Change (from 40 KPH)
30	-9%	50	-9%
35	-18%	60	-18%
40	-27%	65	-27%

## 3. EARTMOVER AND INDUSTRIAL VEHICLE SPEED SERVICE

T&RA (English)		ETRTO (Metric)	
Max Speed	% Change (from 5 MPH)	Max Speed	% Change (from 10 KPH)
Static	+60%	Static	+60%
Creep	+30%	1 KPH	+30%
2 1/2 MPH	+15%	5 KPH	+13%
5 MPH	No Change	10 KPH	No Change
10 MPH	-13%	15 KPH	-7%
15 MPH	-20%	20 KPH	-12%
20 MPH	-26%**	25 KPH	-15%
25 MPH	-32%**		

## 4. INDUSTRIAL VEHICLE SERVICE\* ON SMOOTH FLOORS & RUNWAYS

T&RA (English)		ETRTO (Metric)	
Max Speed	% Change (from 5 MPH)##	Max Speed	% Change (from 10 KPH)##
Static	+80%	Static	+80%
Creep	+60%	1 KPH	+60%
5 KPH (2 1/2 MPH)	+45%	5 KPH	+45%
10 KPH (5 MPH)	+35%	10 KPH	+35%
15 KPH (10 MPH)	+30%	15 KPH	+30%
20 KPH (12 MPH)	+27%	20 KPH	+27%
25 KPH (15 MPH)	+25%	25 KPH	+25%
30 KPH (20 MPH)	+18%**		

\* For coil haulers, log stackers, and straddle carriers the item 3 loads are maximums. For container handlers, piggy-packers and industrial fork lift trucks Goodyear's warranty allowance applies to the 2 1/2 MPH and 5 KPH factors only. Travel distance limited to 2500 ft.

\*\* Goodyear allowance

# For inflation pressure use 5 MPH/10 KPH inflations times 1.20. For steer wheel on fork lift trucks multiply the industrial vehicle ratings by 0.8.

Contact your Rim Supplier regarding information on rim strength.

# APPROXIMATE SHIPPING DATA - RADIAL

Tire Size	Description	Lug Configuration	CMP	Star/Ply Rating	Load Speed Index	TT/TL	Non/Skid (32nds)	Tire Weight
							Lbs	Kg
335/80R18EM	DUNLOP SP T9		-	-	145A2/134B	TL	23	108 49
365/70R18EM	DUNLOP SP T9		-	-	146A2/135B	TL	23	119 54
405/70R18EM	DUNLOP SP T9		-	-	153A2/141B	TL	25	139 63
11.00R20	DUNLOP PG21RC		-	-	165A2/157A3	TT	24	151 69
12.00R20	RL-5K	12/12	6S	3*	175A2	TL	78	370 168
12.00R20	RL-5S		6S	3*	175A2	TL	78	366 166
14.00R20	AT-2A		-	18	160G	TL	30	260 118
16.00R20	AT-2A		-	20	173G	TL	33	332 151
16.00R20	AT-3A		-	20	173G	TL	33	352 160
335/80R20EM	DUNLOP SP T9		-	-	147A2/136B	TL	23	116 53
365/80R20EM	DUNLOP SP T9		-	-	153A2/141B	TL	25	142 64
405/70R20EM	DUNLOP SP T9		-	-	155A2/143B	TL	24	155 70
14.00R24	AS-3A		4S	2*	162A8	TL	32	331 150
14.00R24	RL-4J		4S	3*	171B	TT	48	500 227
14.00R24	SG-2B		4S	1*	153A8	TL	33	287 130
14.00R25	EV-4R INDUSTRIAL		-	3*	193A5	TL	81	455 206
14.00R25	EV-4S INDUSTRIAL		-	3*	193A5	TL	38	555 252
14.00R25	RL-4J		2S	3*	171B	TL	48	450 204
14.00R25	RL-4J		4S	3*	171B	TL	48	486 220
14.00R25	RL-4J		6S	3*	171B	TL	48	463 210
14.00R25	RL-4L		2S	3*	171B	TL	47	396 180
15.5R25	GP-2B		6S	1*	169A2	TL	30	276 125
16.00R25	EV-3R INDUSTRIAL		-	3*	200A5	TL	48	600 272
16.00R25	EV-4C INDUSTRIAL		-	3*	200A5	TL	63	699 317
16.00R25	EV-4R INDUSTRIAL		-	3*	200A5	TL	63	708 321
16.00R25	EV-4S INDUSTRIAL		-	3*	200A5	TL	58	755 342
17.5R25	AS-3A	24/24	4S	2*	162A8	TL	32	351 159
17.5R25	GP-2B		6S	1*	176A2	TL	32	348 158
17.5R25	RL-5K HI-STABILITY		6S	2*	182A2	TL	80	627 285
17.5R25	RL-5S		6S	3*	188A2	TL	80	679 308
17.5R25	RT-3B		6S	1*	176A2	TL	36	407 185
17.5R25	TL-3A+		6S	1*/2*	176A2/167B	TL	45	443 201
18.00R25	EV-3+ INDUSTRIAL		-	3*	207A5	TL	53	910 413
18.00R25	EV-3G INDUSTRIAL		-	3*	207A5	TL	44	917 416
18.00R25	EV-4D INDUSTRIAL		-	3*	207A5	TL	81	1017 461
18.00R25	EV-4R INDUSTRIAL		-	3*	207A5	TL	73	948 430
18.00R25	EV-4S INDUSTRIAL		-	3*	207A5	TL	68	1106 502
18.00R25	EV-5S INDUSTRIAL		-	3*	207A5	TL	113	1179 535
18.00R25	RL-4J		6S	2*	185B	TL	68	847 384
18.00R25	RL-4J		4S	2*	185B	TL	68	781 354
18.00R25	RL-5K	24/24	6S	2*	204A2	TL	98	1090 495
18.00R25	RL-5S		6S	3*	206A2	TL	99	1187 539
20.5R25	AS-3A		4S	2*	171A8	TL	40	530 241
20.5R25	GP-2B		6S	1*/2*	161A8	TL	36	495 225
20.5R25	GP-4D		6S	1*/2*	186A2/177B	TL	64	673 305
20.5R25	RL-5K HI-STABILITY		6S	2*	193A2	TL	89	879 399

# APPROXIMATE SHIPPING DATA - RADIAL

Tire Size	Description	Lug Configuration	CMP	Star/Ply Rating	Load Speed Index	TT/TL	Non/Skid (32nds)	Tire Weight		
								Lbs	Kg	
20.5R25	RL-5S HI-STABILITY	24/24	6S	2*	193A2	TL	89	816	370	
20.5R25	RT-3B		6S	1*	186	TL	41	599	272	
20.5R25	RT-5D HI-STABILITY		6S	2*	193A2	TL	94	875	397	
20.5R25	TL-3A+		6S	1*2*	186A2/177B	TL	51	622	282	
23.5R25	GP-2B		4S	2*	195A2/185B	TL	40	667	302	
23.5R25	GP-4D		6S	1*2*	195A2/185B	TL	69	849	385	
23.5R25	RL-4K HI-STABILITY		6S	3*	206A2	TL	68	1105	501	
23.5R25	RL-5K HI-STABILITY		6S	2*	201A2	TL	99	1116	506	
23.5R25	RL-5S HI-STABILITY		6S	2*	201A2	TL	99	1207	548	
23.5R25	RT-3B		6S	1*	195A2	TL	44	784	356	
23.5R25	RT-5D HI-STABILITY		6S	2*	201A2	TL	101	1110	503	
23.5R25	TL-3A+		6S	1*2*	195A2/185B	TL	54	819	372	
26.5R25	GP-4D		6S	1*2*	202A2/193B	TL	69	1137	516	
26.5R25	GP-4D		6S	2*	209A2	TL	69	1210	549	
26.5R25	RL-4K HI-STABILITY		6S	2*	209A2	TL	67	1357	615	
26.5R25	RL-5K HI-STABILITY		23/23	6S	2*	209A2	TL	110	1606	729
26.5R25	RL-5K HI-STABILITY		23/23	6S	3*	214A2	TL	110	1671	758
26.5R25	RL-5S		6S	3*	214A2	TL	110	1732	786	
26.5R25	RL-5S HI-STABILITY		6S	3*	214A2	TL	110	1843	836	
26.5R25	RT-3B HI-STABILITY		6S	2*	209A2	TL	50	1105	501	
26.5R25	RT-5D HI-STABILITY		6S	2*	209A2	TL	111	1533	696	
26.5R25	TL-3A+		6S	1*2*	202A2/193B	TL	59	1143	519	
29.5R25	GP-4D HI-STABILITY		6S	2*	216A2/200B	TL	73	1519	689	
29.5R25	RL-4K HI-STABILITY		24/24	6S	2*	216A2	TL	72	1800	816
29.5R25	RL-5K HI-STABILITY		24/24	6S	2*	216A2	TL	120	2063	936
29.5R25	RL-5S HI-STABILITY		6S	2*	216A2	TL	120	2324	1054	
29.5R25	RT-3B HI-STABILITY		6S	2*	216A2	TT	56	1475	669	
29.5R25	RT-5D HI-STABILITY		6S	2*	216A2	TL	120	2004	909	
29.5R25	TL-3A+ HI-STABILITY		6S	2*	216A2/200B	TL	60	1617	734	
385/95R25	GP-2B	EV-4M PORT HANDLER	-	3*	170E	TL	30	346	157	
445/95R25	GP-2B		-	-	177E	TL	34	490	222	
450/95R25	EV-4M PORT HANDLER		-	3*	204A5	TL	63	660	299	
480/95R25	EV-4C INDUSTRIAL		-	3*	206A5	TL	63	698	316	
480/95R25	EV-4R INDUSTRIAL		-	3*	206A5	TL	63	720	327	
600/65R25	GP-3D		6S	1*	187A2	TL	40	554	251	
650/65R25	GP-3D		6S	2*3*	199A2/188B	TL	44	778	353	
750/65R25	TL-3A+		6S	1*2*	202A2/190B	TL	57	969	440	
29.5R29	RL-5K HI-STABILITY		6S	3*	223A2	TL	120	2367	1074	
29.5R29	RL-5S HI-STABILITY		6S	3*	223A2	TL	120	2504	1136	
33.25R29	RT-3A	24/24	4S	2*	209B	TL	53	1804	818	
33.25R29	TL-3A		6S	2*	209B	TL	57	1681	762	
33.25R29	TL-4A		6S	2*	209B	TL	81	1815	823	
775/65R29	GP-4D HI-STABILITY		6S	2*	213A2	TL	67	1250	567	
875/65R29	GP-4D HI-STABILITY		2S	3*4*	227A2	TL	72	1886	855	
875/65R29	GP-4D HI-STABILITY		6S	3*4*	227A2	TL	72	1904	864	
875/65R29	RL-4K HI-STABILITY		24/24	6S	3*4*	227A2	TL	72	1950	885

# APPROXIMATE SHIPPING DATA - RADIAL

Tire Size	Description	Lug Configuration	CMP	Star/Ply Rating	Load Speed Index	TT/TL	Non/Skid (32nds)	Tire Weight		
								Lbs	Kg	
18.00R33	EV-3+ INDUSTRIAL		-	3*	211A5	TL	53	1194	542	
18.00R33	EV-S4S INDUSTRIAL		-	3*	214A5	TL	68	1292	586	
18.00R33	RL-4B		6S	3*	195B	TL	68	1013	460	
18.00R33	RL-4B		4S	3*	195B	TL	68	986	447	
18.00R33	RM-4B+		4S	3*	195B	TL	80	1056	479	
18.00R33	RM-4B+		2S	3*	195B	TL	80	1056	479	
18.00R33	RM-4B+		6S	3*	195B	TL	80	1056	479	
18.00R33	RT-4A		4S	3*	195B	TL	68	1051	477	
18.00R33	RT-4A		6S	3*	195B	TL	68	1056	479	
18.00R33	RT-4A		2S	3*	195B	TL	68	1051	477	
21.00R33	RL-4B		4S	2*	200B	TL	68	1301	590	
21.00R33	RL-4B		6S	2*	200B	TL	68	1301	590	
875/65R33	RL-4K HI-STABILITY	20/20	6S	3 <sup>1</sup> /4*	229A2	TL	73	2327	1055	
875/65R33	RL-5K HI-STABILITY		6S	3*	229A2	TL	120	2776	1259	
875/65R33	RL-5S HI-STABILITY		6S	3*	229A2	TL	120	2907	1318	
875/65R33	RT-4D HI-STABILITY		6S	2*	224A2	TL	81	2105	955	
875/65R33	RT-4D HI-STABILITY		6S	3 <sup>1</sup> /4*	229A2/225A8	TL	81	2109	957	
875/65R33	RT-5D HI-STABILITY		6S	2*		TL	120	2405	1091	
21.00R35	RL-3+		2S	2*	201B	TL	56	1351	613	
21.00R35	RM-4B+		6S	2*	201B	TL	85	1364	619	
21.00R35	RM-4B+		7S	2*	201B	TL	85	1364	619	
21.00R35	RM-4B+		4S	2*	201B	TL	85	1356	615	
21.00R35	RM-4B+		2S	2*	201B	TL	85	1364	619	
24.00R35	RL-3+		2S	2*	209B	TL	60	1615	733	
24.00R35	RL-4B		4S	2*	209B	TL	72	1700	771	
24.00R35	RL-4B		6S	2*	209B	TL	72	1672	758	
24.00R35	RL-4J		4S	2*	209B	TL	71	1747	793	
24.00R35	RL-4J		6S	2*	209B	TL	71	1764	800	
24.00R35	RL-4J		2S	2*	209B	TL	71	1748	793	
24.00R35	RM-4B+		4H	2*	209B	TL	88	1849	839	
24.00R35	RM-4B+		6H	2*	209B	TL	88	1829	830	
24.00R35	RM-4B+		2H	2*	209B	TL	88	1714	778	
24.00R35	RT-4A+		2H	2*	209B	TL	89	1738	788	
24.00R35	RT-4A+		7H	2*	209B	TL	89	1759	798	
24.00R35	RT-4A+		6H	2*	209B	TL	89	1759	798	
24.00R35	RT-4A+		4H	2*	209B	TL	89	1749	793	
33.25R35	RL-3J		4S	2*	212B	TL	53	2235	1014	
37.25R35	RL-3J		6S	2*	218B	TL	60	2786	1264	
37.25R35	RL-3J		4S	2*	218B	TL	60	2762	1253	
40.5/75R39	RT-3A+		4S	2*	225B	TL	62	3722	1689	
1150/65R39	RL-5K HI-STABILITY	20/20	4S	2*	242A2	TL	146	4977	2258	
1150/65R39	RL-5K HI-STABILITY		6S	2*	242A2	TL	146	5654	2565	
1150/65R45	RL-5K HI-STABILITY		4S	2*	245A2	TL	149	5838	2648	
1150/65R45	RL-5K HI-STABILITY		20/20	6S	2*	245A2	TL	149	5654	2565
1150/65R45	RL-5K HI-STABILITY		05/05	6S	2*	245A2	TL	149	6063	2750
27.00R49	RH-4A+		2HL	2*	223B	TL	105	3242	1471	

# APPROXIMATE SHIPPING DATA - RADIAL

Tire Size	Description	Lug Configuration	CMP	Star/Ply Rating	Load Speed Index	TT/TL	Non/Skid (32nds)	Tire Weight	
								Lbs	Kg
27.00R49	RH-4A+		3HL	2*	223B	TL	105	3248	1473
27.00R49	RH-4A+		4HL	2*	223B	TL	105	3252	1475
27.00R49	RH-4A+		5HL	2*	223B	TL	105	3260	1479
27.00R49	RH-4A+		6HL	2*	223B	TL	105	3272	1484
27.00R49	RM-4A+		2HL	2*	223B	TL	95	3115	1413
27.00R49	RM-4A+		6HL	2*	223B	TL	95	3115	1413
27.00R49	RM-4A+		5HL	2*	223B	TL	95	3111	1411
27.00R49	RM-4A+		4HL	2*	223B	TL	96	3115	1413
27.00R49	RM-4A+		3HL	2*	223B	TL	96	3115	1413
27.00R49	RT-4A+		5S	2*	223B	TL	95	2952	1339
27.00R49	RT-4A+		6S	2*	223B	TL	95	3015	1367
27.00R49	RT-4A+		3H	2*	223B	TL	95	3080	1397
27.00R49	RT-4A+		2H	2*	223B	TL	95	3075	1395
27.00R49	RT-4A+		6H	2*	223B	TL	95	3112	1412
33.00R51	RM-4A+		3HL	3*	238B	TL	110	5269	2390
33.00R51	RM-4A+		2HL	3*	238B	TL	110	5228	2372
33.00R51	RM-4A+		4HL	3*	238B	TL	110	5267	2389
33.00R51	RM-4A+		6HL	2*	238B	TL	110	5293	2401
36.00R51	RL-4H		2H	2*	241B	TL	108	6230	2826
36.00R51	RL-4H		4H	2*	241B	TL	108	6193	2809
36.00R51	RL-4H		3H	2*	241B	TL	108	6187	2806
40.00R57	RH-4A+		2HL	2*	250B	TL	124	8191	3715
46/90R57	RH-4A+		6HL	2*	252B	TL	124	8850	4014
46/90R57	RH-4A+		5HL	2*	252B	TL	124	8850	4014
46/90R57	RH-4A+		4HL	2*	252B	TL	124	8850	4014
46/90R57	RH-4A+		3HL	2*	252B	TL	124	8850	4014
46/90R57	RH-4A+		2HL	2*	252B	TL	124	8850	4014
46/90R57	RH-4A+		2HL	2*	252B	TL	122	8683	3939
46/90R57	RH-4A+		3HL	2*	252B	TL	122	8773	3979
46/90R57	RH-4A+		4HL	2*	252B	TL	122	8782	3983
46/90R57	RH-4A+		5HL	2*	252B	TL	122	8802	3993
46/90R57	RH-4A+		6HL	2*	252B	TL	122	8777	3981
46/90R57	RM-4B+		2HL	2*	252B	TL	124	8656	3926
46/90R57	RM-4B+		3HL	2*	252B	TL	124	8773	3979
46/90R57	RM-4B+		4HL	2*	252B	TL	124	8782	3983
46/90R57	RM-4B+		5HL	2*	252B	TL	124	8802	3993
46/90R57	RM-4B+		6HL	2*	252B	TL	124	8834	4007
53/80R63	RM-4B+		2HL	2*	261B	TL	140	11286	5120
53/80R63	RM-4B+		3HL	2*	261B	TL	140	11307	5129
53/80R63	RM-4B+		4HL	2*	261B	TL	140	11320	5135
53/80R63	RM-4B+		6HL	2*	261B	TL	140	11320	5135
53/80R63	RM-4B+		5HL	2*	261B	TL	140	11320	5135
59/80R63	RH-4A+		5HL	2*	268B	TL	146	12500	5670
59/80R63	RH-4A+		4HL	2*	268B	TL	146	12500	5670
59/80R63	RH-4A+		2HL	2*	268B	TL	146	12500	5670
59/80R63	RH-4A+		3HL	2*	268B	TL	146	12500	5670

# APPROXIMATE SHIPPING DATA - RADIAL

Tire Size	Description	Lug Configuration	CMP	Star/Ply Rating	Load Speed Index	TT/TL	Non/Skid (32nds)	Tire Weight	
								Lbs	Kg
59/80R63	RM-3A		2HL	2*	268B	TL	89	11420	5180
59/80R63	RM-4A+		6HL	2*	268B	TL	146	12577	5705
59/80R63	RM-4A+		4HL	2*	268B	TL	146	12577	5705
59/80R63	RM-4A+		3HL	2*	268B	TL	146	12565	5699
59/80R63	RM-4A+		2HL	2*	268B	TL	146	12518	5678
59/80R63	RM-4A+		5HL	2*	268B	TL	146	12577	5705

# APPROXIMATE SHIPPING DATA - BIAS

Tire Size	Description	Lug Configuration	CMP	Star/Ply Rating	Load Speed Index	TT/TL	Non/Skid (32nds)	Tire Weight
							Lbs	Kg
7.50-10	AMERICAN MINER SLHD		-	16		TT	25	53 24
27-9-10	AMERICAN MINER SLHD		-	16		TT	25	73 33
27-15-10	AMERICAN MINER SLHD		-	20		TT	34	164 74
27-9-10	AMERICAN MINER SMOOTH		-	16		TT	25	75 34
23-8.50-12	AMERICAN SKID STEER SST-3A		-	8		TL	21	28 13
24-12-12	AMERICAN MINER SLHD		-	24		TL	25	76 35
24X12-12	XTR-3B MS AR		-	24	195B	TL	68	77 35
26-12-12	AMERICAN MINER TRAC		-	12		TL	23	33 15
8.25-15	AMERICAN MINER SLHD		-	16		TT	25	102 46
8.25-15	PERMAFOAM		-	-		-	N/A	90 41
8.25-15	XTRWL MS		-	24		TT	27	136 62
28-15-15	AMERICAN MINER SLHD		-	20		TT	29	98 45
28-13-15	AMERICAN MINER SLHD		-	20		TT	29	103 47
28-13-15	AMERICAN MINER SLHD		-	28		TT	29	105 48
31-15.5-15	AMERICAN SKID STEER SSV-2A		-	8		TL	23	55 25
31-15.5-15	AMERICAN SKID STEER SSV-2A		-	12		TL	23	60 27
32X15-15NHS	AMERICAN MINER NMS		-	24		TT	24	136 62
32-125-15	AMERICAN MINER SLHD		-	20		TT	28	133 60
32-15-15	PERMAFOAM		-	-		-	N/A	108 49
35-15-15	AMERICAN MINER SLHD		-	32		TL	33	218 99
35-15-15	PERMAFOAM		-	-		-	N/A	135 61
35X15-15NHS	TRACTION MINE SERVICE		-	28		TL	31	177 80
35X15-15	XTRWL MSAR		-	28		TL	31	211 96
35X15-15	XTRWL MSAR		-	32		TL	31	230 105
36-11-15	AMERICAN MINER NMS		-	24		TT	24	133 60
36-11-15	AMERICAN MINER NMS		-	16		TT	24	124 56
36-11-15	PERMAFOAM		-	-		-	N/A	114 52
36X11-15	XTRWL MS		-	24		TT	27	169 76
38-16-15	AMERICAN MINER NMS		-	32		TL	29	205 93
38-16-15	AMERICAN MINER NMS		-	28		TL	29	194 88
38-16-15	PERMAFOAM		-	-		-	N/A	204 93
38X16-15	RKMS		-	32		TL	27	237 107
38X16-15	RKMS AR	4S	40			TL	27	272 123
10-16.5	AMERICAN SKID STEER SSI-4A		-	10		TL	32	68 31
10-16.5	AMERICAN SKID STEER SSL-2A		-	8		TL	20	42 19
10-16.5	AMERICAN SKID STEER SSL-2A		-	10		TL	20	43 20
10-16.5	AMERICAN SKID STEER SSL-2A		-	6		TL	20	37 17
10-16.5	AMERICAN SKID STEER SST-3A		-	10		TL	30	64 29
12-16.5	AMERICAN SKID STEER SSI-4A		-	12		TL	40	95 43
12-16.5	AMERICAN SKID STEER SSL-2A		-	8		TL	23	54 25
12-16.5	AMERICAN SKID STEER SSL-2A		-	10		TL	23	56 25
12-16.5	AMERICAN SKID STEER SST-3A		-	12		TL	32	79 36
14-17.5	AMERICAN SKID STEER SSL-2A		-	10		TL	25	84 38
14-17.5	AMERICAN SKID STEER SSL-2A		-	14		TL	25	88 40
14-17.5	AMERICAN SKID STEER SSL-2A		-	8		TL	25	78 35
12.5-80-18	AMERICAN BACKHOE F		-	10		TL	37	95 43

# APPROXIMATE SHIPPING DATA - BIAS

Tire Size	Description	Lug Configuration	CMP	Star/Ply Rating	Load Speed Index	TT/TL	Non/Skid (32nds)	Tire Weight
							Lbs	Kg
15-19.5	AMERICAN SKID STEER SSL-2A		-	14		TL	25	135 61
9.50-20	SMO-5B		7S	16		TL	121	105 48
10.00-20	AMERICAN MINER SLHD		-	16		TT	32	172 78
12.00-20	AMERICAN MINER MS		-	20		TT	28	189 86
12.00-20	HARD ROCK LUG UMS		6S	16		TT	28	193 88
12.00-20	PERMAFOAM		-	-		-	N/A	235 107
12.00-20	STK+ Dev		4S	20		TL	47	195 88
12.00-20	UMS-3A		6S	20		TT	28	223 101
12.00-20	UMS-3A		6S	28		TL	31	253 115
14.00-20	ALL SERVICE NDCC		-	20		TT	24	199 90
14.00-20	AMERICAN MINER NMS		-	32		TT	32	310 141
14.00-20	PERMAFOAM		-	-		-	N/A	320 145
14.00-20	UMS-3A		6S	28		TT	33	356 162
14.00-20	WRL-3A		4S	24		TT	34	317 144
14.00-20	XTR-3B MS AR		-	48		TT	32	435 197
14.00-20	XTR-3B MS AR		-	32		TT	32	349 158
42-13-20	AMERICAN MINER MS		-	32		TT	25	193 88
42X13-20	XTRWL MSAR		6S	32		TT	27	249 113
44-18-20	AMERICAN MINER NMS		-	32		TT	38	328 149
44X18-20	XTRWL MS		-	32		TL	44	368 167
44X18-20	XTRWL MSAR		4S	48		TL	44	442 200
44X18-20	XTRWL MSAR		4S	36		TL	44	372 169
50X20-20	XTR-3C MS AR		-	36		TL	32	454 206
24-21	SRB-7A		2S	14		TL	13	280 127
12.00-24	SMO-5B		7S	20		TL	121	408 185
12.00-24	STK+ Dev		4S	20	155F	TT	47	225 102
12.00-24	UMS-3A		6S	16		TT	28	237 107
13.00-24	AMERICAN MINER SL		-	12		TL	28	137 62
13.00-24	AMERICAN MINER SL		-	16		TL	28	151 69
14.00-24	AMERICAN MINER SL		-	16		TL	34	171 78
14.00-24	AMERICAN MINER SL		-	12		TL	34	160 73
14.00-24	ELV-3A INDUSTRIAL		4S	32		TL	33	435 197
14.00-24	HRL-3A		4S	28		TT	33	327 148
14.00-24	SMO-5B		6S	20		TT	30	537 244
14.00-24	UMS-3A		6S	28		TT	33	407 185
14.00-24	WRL-3A		4S	28		TL	33	366 166
14.00-24	WRL-3A		-	28		TT	33	366 166
16.00-24	PVG-7A		4S	12		TL	15	288 130
16.9-24	AMERICAN BACKHOE		-	8		TL	35	149 68
17.5L-24	AMERICAN BACKHOE		-	8		TL	33	142 64
18.4-24	AMERICAN BACKHOE		-	10		TL	36	182 83
19.5L-24	AMERICAN BACKHOE		-	10		TL	34	188 85
19.5L-24	AMERICAN BACKHOE		-	12		TL	34	196 89
21L-24	AMERICAN BACKHOE		-	12		TL	35	236 107
16.00-25	HRL-3A		4S	32		TL	36	523 237
16.00-25	HRL-4B		4S	32		TL	67	642 291

# APPROXIMATE SHIPPING DATA - BIAS

Tire Size	Description	Lug Configuration	CMP	Star/Ply Rating	Load Speed Index	TT/TL	Non/Skid (32nds)	Tire Weight
							Lbs	Kg
17.5-25	GRL D/L-3A		4S	16		TL	32	254 115
17.5-25	GRL D/L-3A		4S	12		TL	32	254 115
17.5-25	SGL D/L-2A		4S	16		TL	31	254 115
17.5-25	SGL D/L-2A		4S	20		TL	31	269 122
17.5-25	SGL D/L-2A		4S	12		TL	31	217 98
17.5-25	SMO D/L-5B		6S	28		TL	104	670 304
17.5-25	SMO D/L-5B		6S	20		TL	104	660 299
17.5-25	UMS D/L-3A		6S	20		TL	35	438 199
18.00-25	ELV-4B INDUSTRIAL		4S	40		TL	69	902 409
18.00-25	ELV-4D INDUSTRIAL		4S	40		TL	73	1150 522
18.00-25	ELV-5D INDUSTRIAL		4S	40		TL	132	1275 578
18.00-25	SMO-5D		7S	28		TL	102	812 368
18.00-25	SMO-5E		6S	28		TL	99	1021 463
18.00-25	SRB-7A		4S	16		TL	16	369 167
20.5-25	GGL D/L-2A		4S	12		TL	36	276 125
20.5-25	GGL D/L-2A		4S	16		TL	36	309 140
20.5-25	GRL D/L-3A		4S	16		TL	38	367 167
20.5-25	GRL D/L-3A		4S	20		TL	38	381 173
21.00-25	ELV-3C INDUSTRIAL		4S	40		TL	44	1757 797
21.00-25	ELV-5A INDUSTRIAL		4S	32		TL	107	1339 607
21.00-25	SMO D/L-5C		6J	32		TL	125	1350 612
21.00-25	SMO-5A		6S	32		TL	110	1347 611
21.00-25	SRB-7A		4S	28		TL	16	510 231
23.5-25	GGL D/L-2A		4S	20		TL	40	492 223
23.5-25	GRL D/L-3A		4S	20		TL	40	500 227
26.5-25	GRL D/L-3A		4S	26		TL	44	820 372
26.5-25	SMO D/L-5C		6S	32		TL	128	1734 787
26.5-25	SMO D/L-5C		6S	36		TL	128	1658 752
26.5-25	SMO D/L-5E		6S	32		TL	110	1658 752
29.5-25	GRL D/L-3A		4S	28		TL	45	988 448
29.5-29	SMO D/L-5C		7S	40		TL	136	2618 1188
18.00-33	ELV-4B INDUSTRIAL		4S	36		TL	70	1034 469
35/65-33	NRL D/L-5A		6J	42		TL	121	2722 1235
21.00-35	ELV-4B INDUSTRIAL		4S	40		TL	70	1448 657
24.00-35	HRL-4B		4S	42		TL	73	1864 845
37.25-35	HRL-3F		4S	36		TL	67	2496 1132
37.5-39	HRL-3F		4S	52		TL	67	2827 1283
45/65-45	NDL D/L-5/15C		6J	58		TL	148	6078 2757
45/65-45	NRL D/L-5A		4J	58		TL	145	5440 2468
45/65-45	NRL D/L-5A		6J	58		TL	145	5440 2468

# TUBES, FLAPS AND VALVES INFORMATION FOR OFF-THE-ROAD TIRES

## CONVENTIONAL SIZES

Tire Size	Ply Rating	Rim	Tube Size	Flap Size *	Angle Valve **
16.00-20/21	All	11.25	16.00-20/21 Truck	20/21F10.5	J1179B
16.00-24/25	All	11.25	16.00-24/25 Truck	24/25F9.6	J1175C
18.00-24	Thru 20	13.00	18.00-24/25 Truck	24/25F12.4	J1175C
18.00-24	24 and up	13.00		24/25F9.6	J1175C
18.00-25	12 thru 24	13.00	18.00-24/25 Truck	24/25F10.9	J1175C
18.00-25	28 and up	13.00	18.00-24/25 Truck	24/25F9.6	J1175C
18.00-33	All	13.00	18.00-32/33 Truck	33F8.9	J1076D
18.00-49	All	13.00			J1175C
21.00-25	24	15.00	21.00-24/25 Truck	24/25F12.4	J1179B
21.00-25	28 and up	15.00	21.00-24/25 Truck	24/25F10.9	J1179B
21.00-35	All	15.00	21.00-35 Truck	35F12.0	J1175C
21.00-49	All	15.00			J1175C
24.00-25	All	17.00	24.00-25 Truck	25F14.9	J1175C
24.00-29	All	17.00	24.00-29 Truck	29F15.0	J1175C
24.00-35	All	17.00	24.00-35 Truck	35F12.0	J1175C
24.00-49	All	17.00	24.00-49 Truck		J1175C
27.00-33	All	22.00	21.00-35 Truck	33F23.00	J1175C
27.00-49	All	19.50			J1175C
30.00-33	40	22.00	29.5-35 Truck	33F23.0	J1175C
36.00-51	All	26.00			J1175C

**NOTE:** Goodyear flaps are compounded to resist cracking and heat and they protect the tube from rim and bead toe injury in the tube-type assemblies between the rim and the tire.

\*\* Valve J1014 is standard straight valve on all EM Tubes 16.00-20 and up.  
Angle Valve shown is most commonly used. Flap Width specified is minimum flap width. Flap width is measured on rim side of flap.

**\*EXAMPLE:** 24-9.0  
24 + Nominal Diameter  
9.0 + Flap Width

Consult your Goodyear Representative for Source of Manufacture.

WIDE BASE SIZES

Tire Size	Ply Rating	Rim	Tube Size	Flap Size *	Angle Valve **
20.5-25	All	17.00	20.5-25 Truck	25F14.9	J1175C
23.5-25	Thru 16	19.50		25F19.8	J1175C
23.5-25	20 and up	19.50	23.5-25 Truck	25F18.3	J1175C
26.5-25	Thru 16	22.00	26.5-25 Truck	25F21.6	J1175C
26.5-25	20 and up	22.00	26.5-25 Truck	25F19.8	J1175C
26.5-29	All	22.00	26.5-29 Truck	29F19.0	J1175C
29.5-25	16	25.00	29.5-25 Truck	25F23.1	J1175C
29.5-25	22 and up	25.00	29.5-25 Truck	25F21.6	J1175C
29.5-29	Thru 22	25.00	29.5-29 Truck	35F22.0	J1175C
29.5-29	28 and up	25.00	29.5-29 Truck		J1175C
29.5-35	All	25.00	29.5-35 Truck	35F22.0	J1175C
33.25-35	All	27.00	33.25-35 Truck		J1175C
33.5-33	Thru 26	28.00	33.35-35 Truck	33F25.0	J1175C
33.5-33	32 and up	28.00	33.25-35	33F23.00	J1175C
33.5-39	All	28.00	33.5-39 Truck		J1175C
37.5-33	All	32.00		33F25.0	J1175C
37.25-35	All	31.00	33.25-35 Truck		J1175C
37.5-39	All	32.00	37.5-39 Truck	39F27.0	J1175C
37.5-51	All	32.00			J1175C

**NOTE:** Goodyear flaps are compounded to resist cracking and heat and they protect the tube from rim and bead toe injury in the tube-type assemblies between the rim and the tire.

\*\* Valve J1014 is standard straight valve on all EM Tubes 16.00-20 and up.  
Angle Valve shown is most commonly used. Flap Width specified is minimum flap width. Flap width is measured on rim side of flap.

**\*EXAMPLE:** 24-9.0  
24 + Nominal Diameter  
9.0 + Flap Width

Consult your Goodyear Representative for Source of Manufacture.

## GRADER TIRES

## TIRES USING FLAT BASE RIMS

Tire Size	Rim	Tube Size	Valve No.	Flap Size
8.25-20TG	6.50T	8.25-20TR	TR77A/TR462	20F7.0
<b>TIRES USING SEMI-DROP CENTER RIMS</b>				
7.50-20TG	5.50-DC	7.50-20T	TR177A/TR461	20-7.0
10.00-24TG	8.00TG	10.00/11.00/12.00-24GR	218A	24-8.4RG
12.00-24TG	8.00TG	10.00/11.00/12.00-24GR	218A	24-8.4RG
13.00-20TG	8.00TG	13.00/14.00-20GR	218A	20-9.6RG
13.00-24TG	8.00TG	13.00/14.00-24GR	220A	24-8.4RG
14.00-20TG	8.00TG, 10.00VA	13.00/14.00-20GR	218A*	20-9.6RG
14.00-24TG	8.00TG, 10.00VA	13.00/14.00-24GR	200A	24-10.0RG
16.00-20TG	10.00VA	13.00/14.00-20GR	220A	20-9.6RG
16.00-24TG	10.00VA	16.00-24GR	220A	24-10.0RG
18.00-26	DW16-DC	23.1-26 (18.00-26) Farm	218A	

\* When used on a 10.00 rim, TR220A valve should be used.

## SAND TIRES

Tire Size	Rim	Tube Size	Rec. Valves	Flap Size
9.00-15 DT	5-1/2K-Dc	9.00-15 Truck	TR175A/TR463	15-6.0
9.00-16 DT	6.50H	9.00-16 Truck	TR177A/TR461	16/16.5-7.0LT
11.00-16 DT	6.50H		TR177A/TR461	16/16.5-7.0LT
16.00-16 DT	6.50H	16.00-16 Truck	TR177A/TR461	16/16.5-7.0LT
14.00-20 DT	10.00W	13.00/14.00-20 Truck	TR179A/TR465	20/21F10.5
16.00-20 DT	10.00W	16.00-20/21 Truck	SP1000	20F9.0
24-20.5 DT	18.00DC		J1175C	21-20.0
24-21 DT	18.00		J1175C	21-20.0
27.25-21 DT	19.50		J1014	21-20.0
18.00-25 DT	10.00	18.00-24/25 Truck	J1175C	24/25F10.5
21.00-25 DT	15.00	21.0-24/25 Truck	J1179B	24/25F13.0
29.5-25 DT	25.00	29.5-25 Truck	J1175C	25F23.1

Consult your Goodyear Representative for Source of Manufacture.

## TYPE I, II AND III TRUCK RIMS

Tire & Tube Size	Rim	Valve	Flat Size
8.25-20	6.50T	TR77A/TR462	20F7.0
9.00-20	7.00T	TR175A/TR463	20F8.0
10.00-20	7.50V	TR78A/TR464	20F8.0
10.00-22	7.50V	TR78A/TR464	22F8.0
11.00-20	8.00V	TR78A/TR464	20F8.0
11.00-22	8.00V	TR78A/TR464	22F8.0

Tire & Tube Size	Rim	Valve	Flat Size
11.00-24	8.00V	TR78A/TR464	24F8.0
12.00-20	8.50V	TR78A/TR464	20F8.0
12.00-24	8.50V	TR78A/TR464	24F8.0
13.00-24	13.00/14.00-24/25;17.5-25	10.00W	TR179A/TR465 24F9.0
14.00-20	13.00/14.00-20	10.00W	TR179A/TR465 20F10.0
14.00-24	13.00/14.00-24/25;17.5-25	10.00W	TR179A/TR465 24F9.0

Flap width specified is minimum flap width. Flap width is measured on rim side of flap.

Consult your Goodyear Representative for Source of Manufacture.

## TUBES AND FLAPS

Only use radial type tubes and flaps in radial tires (see special marking on tubes or flaps). Preferably fit a new tube and a new flap when mounting a new tire.

### TUBES

A tube too large will be liable to buckling, and to early failure. A tube too small will be stretched excessively, leading to reduced rub resistance, and worse air retention. In an emergency, a small tube is better than a large tube, since the failure mode is less likely to be catastrophic.

In case of necessity, a tube may be reused if,

- There is no apparent damage
- The tube has not grown excessively during the first life

### FLAPS

The flap is designed to:

- Protect the tube from the roughness of the rim
- Prevent the tube being pinched by the component parts of multi-pieced rims
- Prevent the tube being pushed through the valve slot

As a rule, flaps are necessary for any rim which has a valve slot against a valve hole.

*Note: The fitment of tubes to "tubeless" tires is not recommended.*

## SUPER LARGE BORE VALVE

The Super Large Bore Valve was designed in answer to the many requests for a valve which would save time inflating and deflating earthmover tires. It fits the standard 13/16" valve holes. No need to re bore your rims, if your present hole is on center. If valve hole is under bead seat band, it must be moved out, preferably on center.



TURRET TYPE VALVE



CH-8 CORE HOUSING



SWIVEL TYPE VALVE



CH-8 CORE HOUSING




INFLATING ADAPTOR

# EARTHTMOVER TUBE VALVES

## LARGE BORE TUBE VALVES (SWIVEL TYPE)

### TIRE AND RIM ASSOCIATION STANDARD

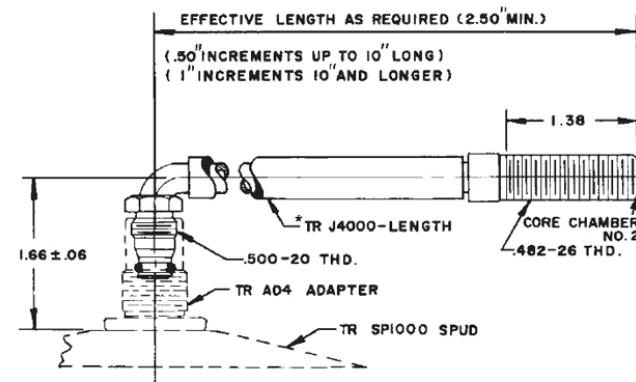

\*Stems are specified as TR J4000-Length.


**Example:** For an effective length of 9.50", the stem number is TR J4000-9.50.

Recommended installation torque: 70-80 inch-pounds.

Valve core: TR C2

## LARGE BORE TUBE SPUD ADAPTOR - TR AD4


### TIRE AND RIM ASSOCIATION STANDARD

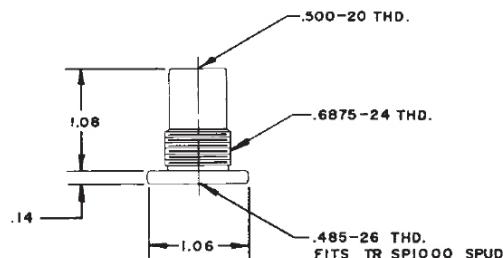

**Note:** TR AD4 Adapter combined with TR SP1000 Spud is equivalent to TR SP4000 Spud.

## LARGE BORE TUBE VALVES (STRAIGHT AND SWIVEL TYPE)


### TIRE AND RIM ASSOCIATION STANDARD

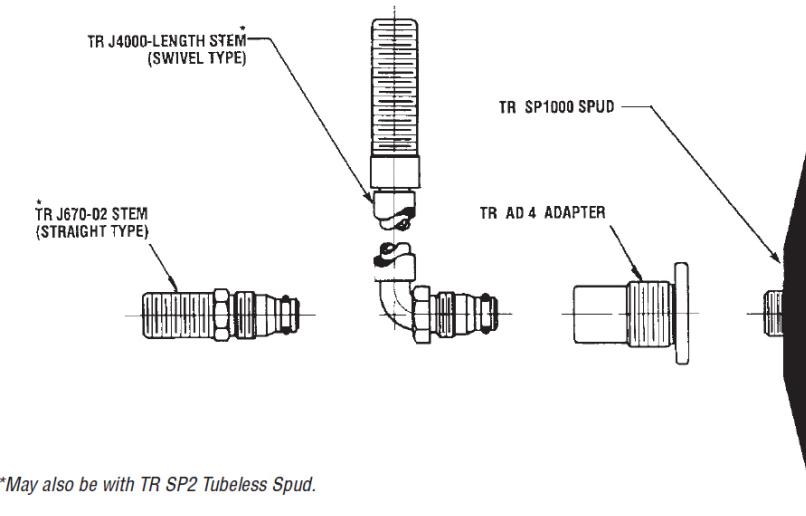

\*May also be with TR SP2 Tubeless Spud.

## LARGE BORE TUBE VALVE (STRAIGHT TYPE)

### TIRE AND RIM ASSOCIATION STANDARD

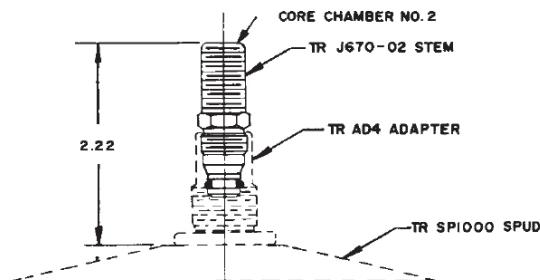

Recommended installation torque: 70-80 inch-pounds.

Valve core: TR C2


# EARTHTMOVER TUBE VALVES

## CONVERTIBLE TUBE VALVES AIR-LIQUID TYPE

### TIRE AND RIM ASSOCIATION STANDARD

TR VALVE NO.	A	B (REF.)
400	3.35 (85)	3.0 (75)
411	4.13 (105)	3.7 (95)
442	4.53 (115)	4.1 (105)
443	4.92 (125)	4.5 (115)
444	5.51 (140)	5.1 (130)
445	6.10 (155)	5.7 (145)

Valve Core: TR C1 (Short core only)

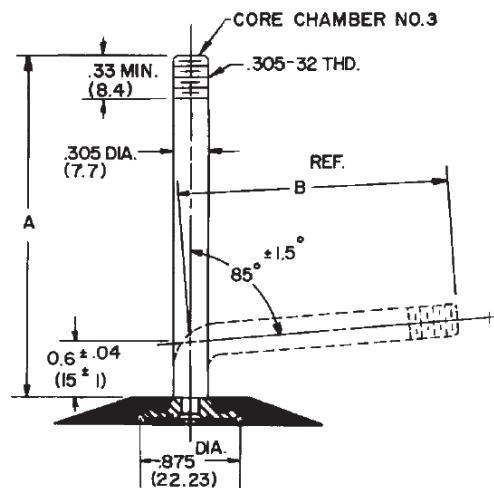


Dimensions in Inches (Millimeters)

## SCREW-ON STANDARD BORE TUBE VALVES

### TIRE AND RIM ASSOCIATION STANDARD

TR VALVE NO.	B
1075A	3.0
1077A	4.1
1078A	5.0
1175A	4.5
1177A	3.7
1179A	5.6

Valve Core: TR C1

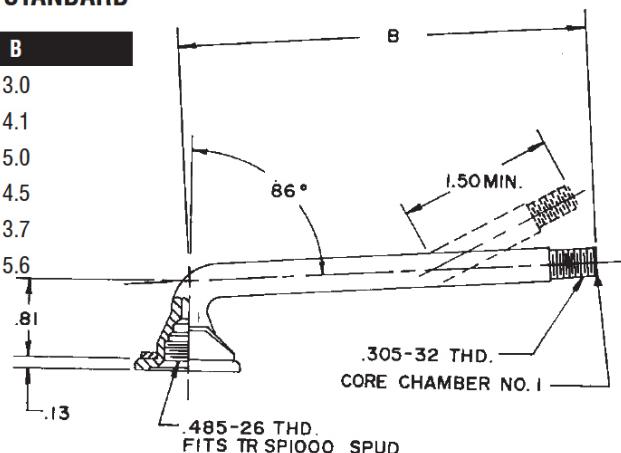


.485-26 THD.  
FITS TR SP1000 SPUD

## CONVERTIBLE TUBE VALVES AIR-LIQUID TYPE

### TIRE AND RIM ASSOCIATION STANDARD

TR VALVE NO.	A	B (REF.)
460	3.35 (85)	3.0 (75)
461	4.13 (105)	3.7 (95)
462	4.53 (115)	4.1 (105)
463	4.92 (125)	4.5 (115)
464	5.51 (140)	5.1 (130)
465	6.10 (155)	5.7 (145)

Valve Core: TR C1

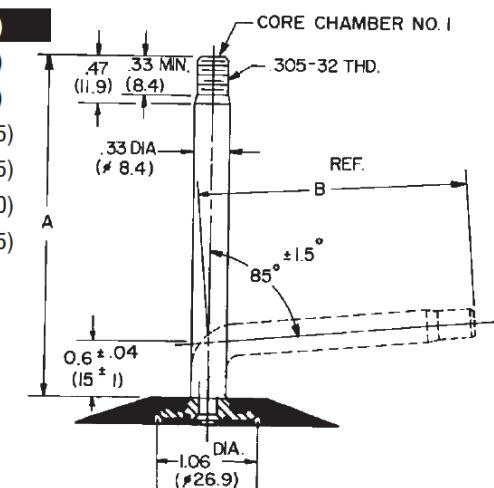


Units—In. (mm)

## SCREW-ON LARGE BORE CONVERTIBLE TUBE VALVES

### TIRE AND RIM ASSOCIATION STANDARD

TR VALVE NO.	FORM	A	A <sub>1</sub>	B	J	Z°
J1014	A	1.91	—	—	1.44	+
J1076	A	4.16	—	—	.75	—
	D	—	2.06	2.31	.75	90
	E	—	1.38	3.00	.75	88
J1175	A	5.28	—	—	.75	—
J1078	C	—	1.38	4.13	.75	88
	A	5.78	—	—	.75	—
J1179	B	—	1.38	4.62	.75	82
	A	6.41	—	—	.75	—
J1179	B	—	1.38	5.25	.75	88

Valve Core: TR C2

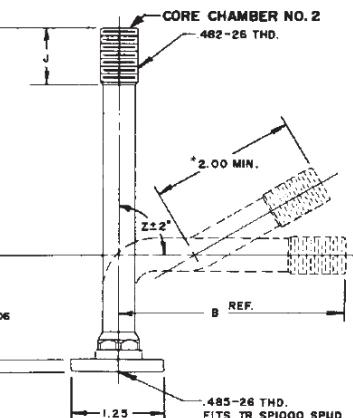

## TR SP1000 SPUD (AIR LIQUID TYPE)

\*Required for valve core sealing

SIZE	MEASURING RIM	APPROVED ALTERNATE RIM
7.00-20 NHS	5.50 S	6.00 S
7.50-15 K	6L, 6 LB (DC)	5.50 F (SDC)
7.50-20 NHS	6.00 S	6.50 T
7.50-20 TG	6.00 S	6.50 T
8.25-20 NHS	6.50 T	7.00 T
8.25-20 TG	6.50 T	7.00 T
9.00-15 DT	5 1/2 K, 5.50F	
9.00-16 DT	6.50 H	
9.00-20 NHS	7.00 T	7.50 V
10.00-20 NHS	7.50 V	8.00 V
10.00-24 TG	8.00 TG (SDC)	
11.00-16 DT	6.50 H	
11.00-20 NHS	8.00 V	8.50 V
12.00-20 NHS	8.50 V	9.00 V
12.00-21 NHS	8.50	
12.00-24 NHS	8.50 V	9.00 V
12.00-24 TG	8.00 TG	
12.00-25 NHS	8.50	
13.00-20 TG	8.00 TG	
13.00-24 NHS	10.00 W	9.00 V
13.00-24 TG	8.00 TG (14 PR Max)	10.00 VA (16 PR)
13.00-25 NHS	10.00	
14.00-20 NHS	10.00 W	
14.00-20 TG	8.00 TG (14 PR Max)	10.00 VA (16 PR)
14.00-21 NHS	10.00	
14.00-24 NHS	10.00 W	
14.00-24 TG	8.00 TG (14 PR Max)	10.00 VA (16 PR)
14.00-25 NHS	10.00	
15.5-25	12.00-1.3	13.00 LR-DC (12 PR/*MAX) 12.00-1.3 (SDC)
16.00-20	10.00 W	

SIZE	MEASURING RIM	APPROVED ALTERNATE RIM
16.00-20 DT	10.00 W	
16.00-20 TG	10.00 VA	
16.00-21 NHS	11.25-2.0	10.00-1.5
16.00-24 TG	10.00 VA	
16.00-25	11.25-2.0	
17.5-25	14.00-1.5	13.00 LR-DC (12 PR/*MAX) 14.00-1.3 (SDC)
18.00-25	13.00-2.5	
61x18.00-25	13.00-2.5	
18.00-25 DT	10.00 T	
18.00-26	DW-16 (drop center rim)	
18.00-33	13.00-2.5	
18.00-49	13.00-2.75	
20.5-25	17.00-2.0	17.00 AL (16PR MAX)
21.00-25	15.00-3.0	
21.00-25 DT	15.00-3.0	
21.00-35	15.00-3.0	
21.00-49	15.00-3.0	
23.5-25	19.50-2.5	
24.00-25	17.00-3.5	
24.00-29	17.00-3.5	
24.00-35	17.00-3.5	
24.00-43	17.00-3.5	
24.00-49	17.00-3.5	
24.00-51	17.00-3.5	
26.5-25	22.00-3.0	
26.5-29	22.00-3.0	
27.00-33	22.00-4.0	
27.00-49	19.50-4.0	
27.00-51	19.50-4.0	
27.56-5.5	20.0-1.25	21.0-1.25

Consult your Goodyear Representative for Source of manufacture.

Use Arctic O-Rings and valves when ambient temperature is below -30°F (-34°C)

SIZE	MEASURING RIM	APPROVED ALTERNATE RIM
29.5-25	25.00-3.5	
29.5-29	25.00-3.5	24.00-3.5, 26.00-3.5
29.5-25 DT	25.00-3.5	
29.5-35	25.00-3.5	27.00-3.5
30.00-33	22.00-4.5	
30.00-51	22.00-4.5	
30-56.5	22.0-1.25	21.0-1.25
33.00-51	24.00-5.0	
33.25-29	27.00-3.5	26.00-3.5
33.25-35	27.00-3.5	29.00-3.5
33.5-33	28.00-4.0	
33.5-39	28.00-4.0	
36.00-51	26.00-5.0	
36.00-51 DT	26.00-5.0	
37.00-57	27.00-6.0	
37.25-35	31.00-4.0	
37.5-33	32.00-4.5	
37.5-39	32.00-4.5	
37.5-51	32.00-4.5	
38-39	28.00-4.0	
40.00-57	29.00-6.0	27.00-6.0
46/90R57	32.00-6.0	29.00-6.0
41.25/70-39	32.00-4.5	
49.5-57	36.00-6.0	
50/80-57	36.00-6.0	
52/80-57	36.00-6.0	
550/65R25	14.00-1.5	14.00-1.3
600/65R25	17.00-2.0	17.00-1.7
650/65R25	19.50-2.5	17.00-1.7/2.0
750/65R25(30/65R25)	24.00-3.0	22.00-3.0

SIZE	MEASURING RIM	APPROVED ALTERNATE RIM
800/65R29	24.00-3.0	25.00-3.0
875/65R29	27.00-3.0	25.00-3.0
30/65-29	24.00-3.0	
35/65-33	28.00-3.5	
40/65-39	32.00-4.0	
46/65-45	36.00-4.5	
50/65-51	40.00-4.5	
53/80R63	36.00-5.0	38.00-5.0
59/80R63	44.00-5.0	41.00-5.0

Consult your Goodyear Representative for Source of manufacture.


Use Arctic O-Rings and valves when ambient temperature is below -30°F (-34°C)

# O-RINGS

Rim Diameter	Part Number	A (in)	B (in)	Weight
20	OR220TG	18.25	0.26	0.13
21	OR21T	19.25	0.26	0.14
24	OR224TG	22	0.26	0.15
25	OR25T	22.75	0.26	0.16
25	OR325T	22.44	0.385	0.3
29	OR329T	26.25	0.385	0.4
33	OR333T	30.13	0.385	0.5
35	OR335T	32.13	0.385	0.5
39	OR339T	36.13	0.385	0.6
45	OR345T	41.13	0.385	0.7
49	OR349T	45.13	0.385	0.7
51	OR451T	46	0.5	1.2
57	OR457T	51.63	0.5	1.3
63	OR463T	57.273	0.5	1.44

Nominal Rim Diam.	Basic Rim Type	Part No.	Sealing Ring Diam. - A	Cross Section - B (in)	Cross Section - B (mm)
20"	JM	OR20JM	19.125	0.230	5.8
21"	T	OR21T	19.250	0.260	6.6
25"	T	OR25T	23.250	0.260	6.6
20"	TG	OR220TG	18.250	0.260	6.6
24"	TG	OR224TG	22.000	0.260	6.6
25"	STN-HTN	OR325T	22.438	0.385	9.8
29"	HTS-HTHM	OR329T	26.250	0.385	9.8
33"	HTHM-RW	OR333T	30.125	0.385	9.8
35"	HTS-HTHM	OR335T	32.125	0.385	9.8
39"	HTS-HTHM	OR339T	36.125	0.385	9.8
49"	HTHM-RW	OR349T	45.125	0.385	9.8
51"	HTS-HTHM	OR351T	47.125	0.385	9.8
51"	HDT	OR451T	46.000	0.500	12.7
57"	HDT	OR457T	51.625	0.500	12.7

O-Ring	Tire Size				
OR225	15.5-25	17.5-25			
OR325	18.00-25	20.5-25	23.5-25	26.5-25	29.5-25
OR329	26.5-29	29.5-29	30/65-29	33.25-29	
OR333	18.00-33	33.5-33	35/65-33	27.5-33	
OR335	21.00-35	24.00-35	29.5-35	33.25-35	

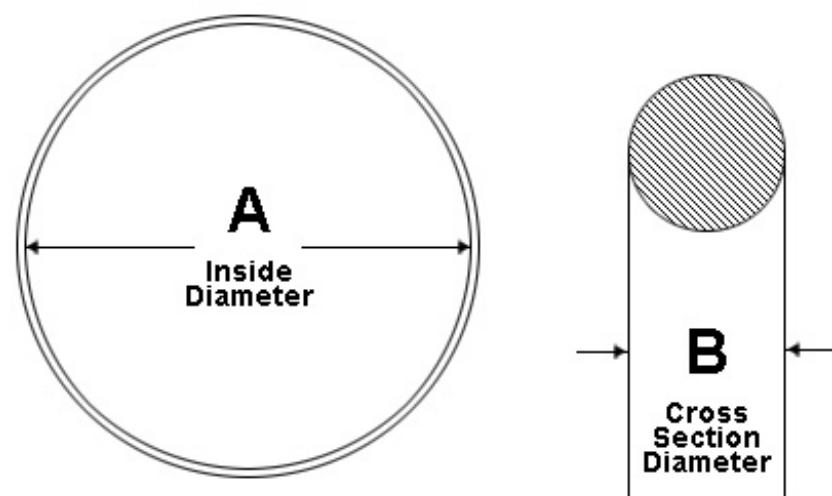


## ARCTIC "O" RINGS

Specifically compounded "O" rings for sub-zero temperatures. Engineered to function and create seal at -65°F. "O" rings are further identified with a green band around section circumference close to part number. Add "A" to part number for Arctic "O" ring (for example: OR335TA).


# EARTMOVER RIM STYLES

THREE PIECE HEAVY DUTY TRUCK

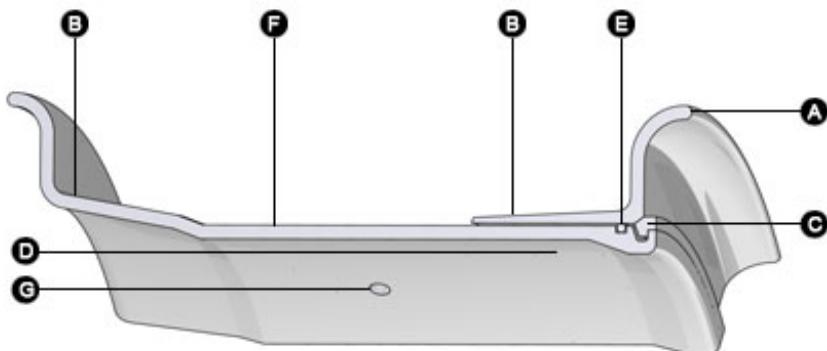


- A** Side Flange
- B** Tapered Bead Seats
- C** Lock Ring
- D** Mounting Bevel
- E** Sealing Ring
- F** Rim Base
- G** Embossed Valve Hole

THREE PIECE GRADER

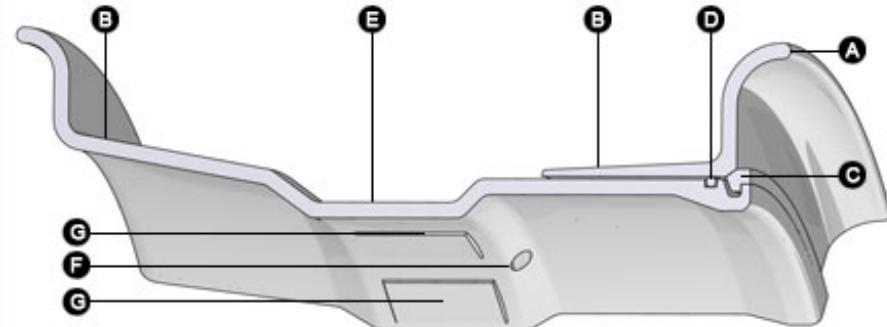


- A** Side Flange
- B** Tapered Bead Seats
- C** Lock Ring
- D** Sealing Ring
- E** Rim Base
- F** Embossed Valve Hole
- G** Locating Lugs

FIVE PIECE HEAVY DUTY AND WIDE BASE

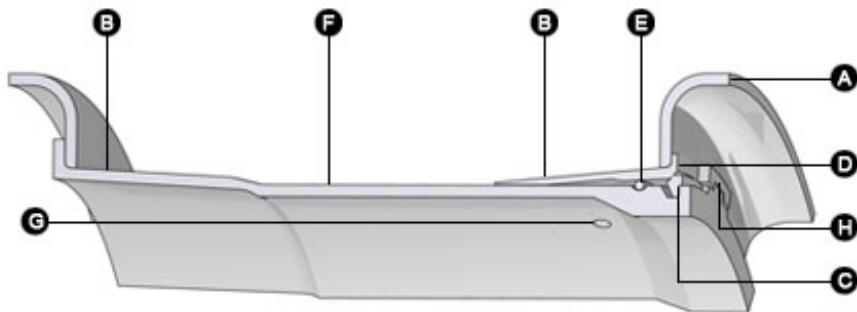

- A** Side Flange
- B** Tapered Bead Seats
- C** Lock Ring
- D** Pry Bar Pockets
- E** Sealing Ring
- F** Rim Base
- G** Valve Hole
- H** Bead Seat Band Driver


FIVE PIECE EXTRA HEAVY DUTY

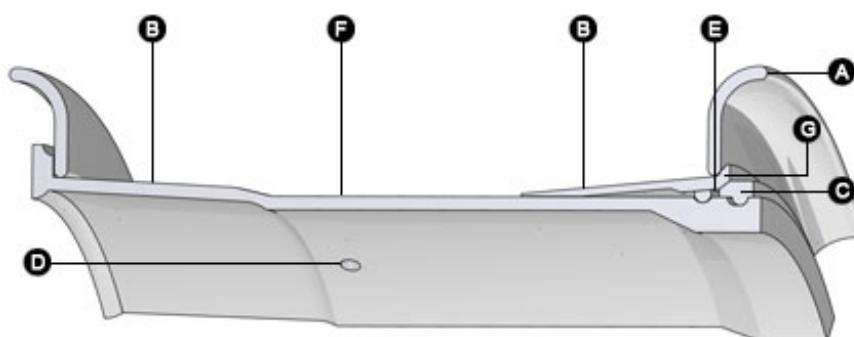

- A** Heavy Side Flange
- B** Tapered Bead Seats
- C** Lock Ring
- D** Valve Hole
- E** Sealing Ring
- F** Rim Base
- G** Circumferential Pry Bar Groove

# EARTHTMOVER RIM STYLES

## SEVEN PIECE SPEED WHEEL

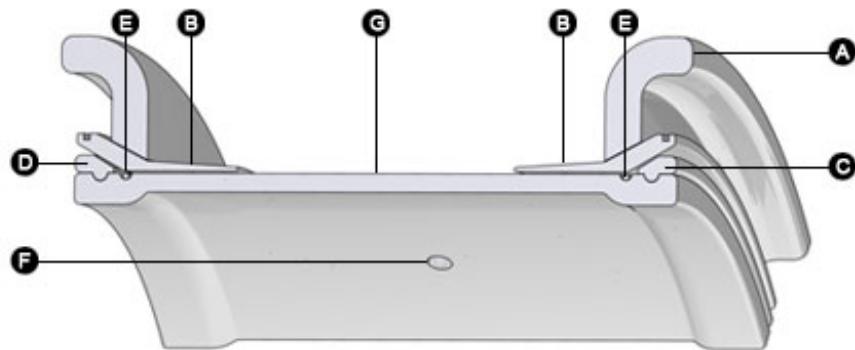

- |  |                           |
|--|---------------------------|
| <b>A</b> Heavy Side Flange                 | <b>E</b> Sealing "O" Ring |
| <b>B</b> Tapered Bead Seats                | <b>F</b> Valve Hole       |
| <b>C</b> Lock Ring                         | <b>G</b> Rim Base         |
| <b>D</b> Two Piece Bolt Together Lock Ring |                           |

## **NOTES**